


Part No. AP822601

Automotive Universal Broadband FR4 Embedded LTE / LPWA Antenna

698 – 960 MHz / 1710 – 2200 MHz / 2300 – 2400 MHz / 2500 – 2700 MHz / 3300– 3800 MHz

Supports: Broadband LTE (OCTA-BAND), LTE CAT-M, NB-IoT, SigFox, LoRa, Cellular LPWA, RPMA, CBRS

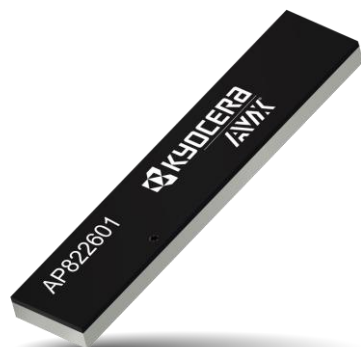

Broadband FR4 Embedded LTE/LPWA Antenna

698 - 960 MHz
1700 - 2700 MHz
3300 - 3800 MHz

KEY BENEFITS

Reduced Costs and Time-to-Market

Standard antenna eliminates design fees and cycle time associated with a custom solution; getting products to market faster.

Greater Flexibility with Unique Form Factors

KYOCERA AVX's technology helps you deliver more advanced ergonomic designs without adverse impact on product performance.

Reliability

Comply with latest RoHS requirements

APPLICATIONS

- Medical applications
- Home automation
- Smart metering
- M2M, Industrial devices
- IoT
- Firstnet
- Automotive
- Healthcare
- Point of Sale
- Tracking
- NB-IoT
- Sigfox
- LoRa
- Cellular LPWA
- RPMA
- LTE CAT-M

KYOCERA AVX A-Series automotive antennas deliver on the key needs of device designers for higher functionality.

KYOCERA AVX has completed rigorous testing to qualify the A-series antennas for automotive applications. Although the AEC-Q200 standard does not include antenna products, all testing has been done following applicable AEC-Q200 requirements and procedures as closely as possible. Customers must provide additional quality requirements, if any, to drive additional compliance testing.

Electrical Specifications

Typical AP822601 performance 140 x 50 mm PCB

Frequency (MHz)	698-960	1710-2200	2500-2700 (B7)
Peak Gain	2.6 dBi	4.4 dBi	3.4 dBi
Average Efficiency	68%	76%	52%
VSWR Match	< 2.5:1		< 2.5:1
Polarization	Linear		
Power Handling	2 Watt CW		
Feed Point Impedance	50 Ω unbalanced		

Frequency (MHz)	2300-2400 (Band 40)	3300-3800 (n78)
Peak Gain	1.8 dBi	2.8 dBi
Average Efficiency	46%	59%
VSWR Match	< 3.0:1	< 2.5:1
Polarization	Linear	
Power Handling	2 Watt CW	
Feed Point Impedance	50 Ω unbalanced	

LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Mechanical Specifications & Ordering Part Number

Ordering Part #	AP822601
Dimensions (mm)	49.6 x 8.0 x 3.3
Mounting Type	SMT (P&P)
Weight (grams)	2.63
Packaging	Tape and Reel
Demo Board	P822601-01
Temperature Range	-50/+125 °C
Temperature Cycle	IEC 60068-2-14:2009
Temperature Exposure	Mil-STD-202 Method 108
High Temperature & High Humidity	MIL-STD-202
Mechanical Shock	IEC 60068-2-27:2008
Vibration	IEC 60068-2-6:2007
IMDS and PPAP available	

LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

LTE Bands covered by (AP822601)



LTE Band	Frequency Band (MHz)	Uplink (UL) (MHz)	Downlink (DL) (MHz)	Region	Covered
1	2100	1920 - 1980	2110 - 2170	Global	Yes
2	1900	1850 - 1910	1930 - 1990	NAM	
3	1800	1710 - 1785	1805 - 1880	Global	
4	1700	1710 - 1755	2110 - 2155	NAM	
5	850	824 - 849	869 - 894	NAM	
6	850	830 - 840	875 - 885	APAC	
7	2600	2500 - 2570	2620 - 2690	EMEA	
8	900	880 - 915	925 - 960	Global	
9	1800	1749.9 - 1784.9	1844.9 - 1879.9	APAC	
10	1700	1710 - 1770	2110 - 2170	NAM	No
11	1500	1427.9 - 1447.9	1475.9 - 1495.9	Japan	
12	700	699 - 716	729 - 746	NAM	Yes
13	700	777 - 787	746 - 756	NAM	
14	700	788 - 798	758 - 768	NAM	
17	700	704 - 716	734 - 746	NAM	
18	850	815 - 830	860 - 875	Japan	
19	850	830 - 845	875 - 890	Japan	
20	800	832 - 862	791 - 821	EMEA	No
21	1500	1447.9 - 1462.9	1495.9 - 1510.9	Japan	
22	3500	3410 - 3490	3510 - 3590	EMEA	Yes
23	2000	2000 - 2020	2180 - 2200	NAM	No
24	1600	1626.5 - 1660.5	1525 - 1559	NAM	
25	1900	1850 - 1915	1930 - 1995	NAM	Yes
26	850	814 - 849	859 - 894	NAM	
27	850	807 - 824	852 - 869	NAM	
28	700	703 - 748	758 - 803	APAC,EU	
29	700	N/A	717 - 728	NAM	
30	2300	2305 - 23151	2350 - 2360	NAM	No
31	450	452.5 - 457.5	462.5 - 467.5	Global	
32	1500	N/A	1452 - 1496	EMEA	
33	1900	1900 - 1920			Yes
34	2000	2010 - 2025			
35	1850	1850 - 1910			
36	1900	1930 - 1990			
37	1900	1910 - 1930			
38	2600	2570 - 2620			
39	1900	1880 - 1920			
40	2300	2300 - 2400			
41	2500	2496 - 2690			
42	3500	3400 - 3600			
43	3700	3600 - 3800			

LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Dimensions (AP822601)


Typical antenna dimensions (mm)

Part Number	A	B	C
AP822601	49.6 ± 0.2	8.0 ± 0.2	3.3 ± 0.33

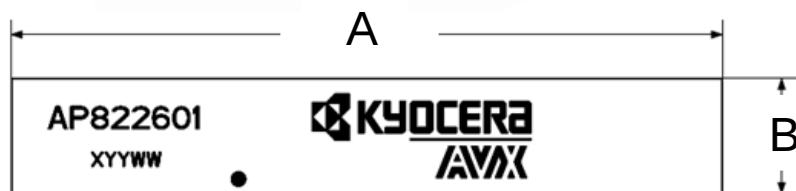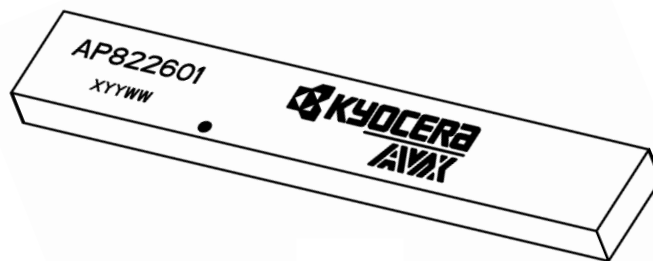


Top View

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad

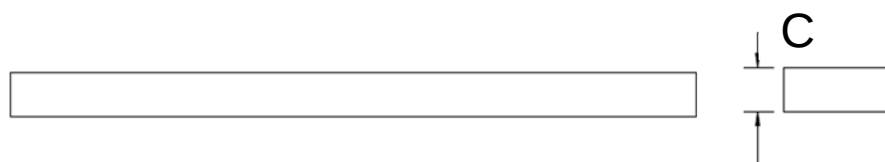

Front View/Height

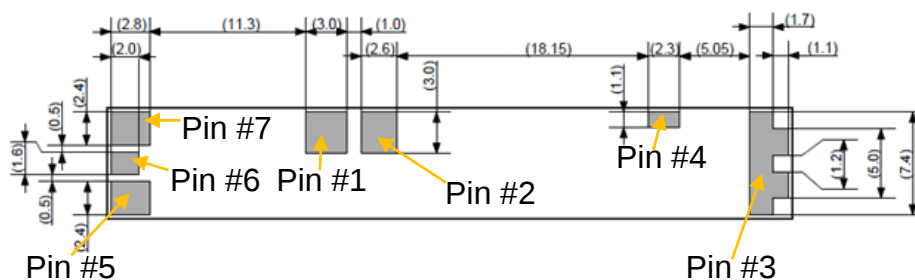


Bottom View

LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


VSWR and Efficiency Plots

Typical AP822601 performance 140 x 50 mm PCB


Low Band VSWR

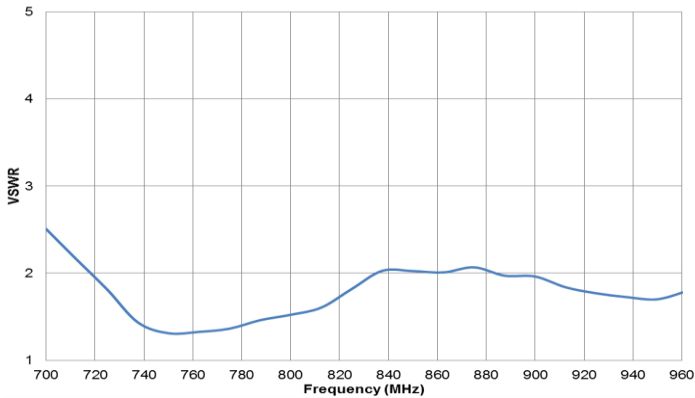


Low Band Efficiency

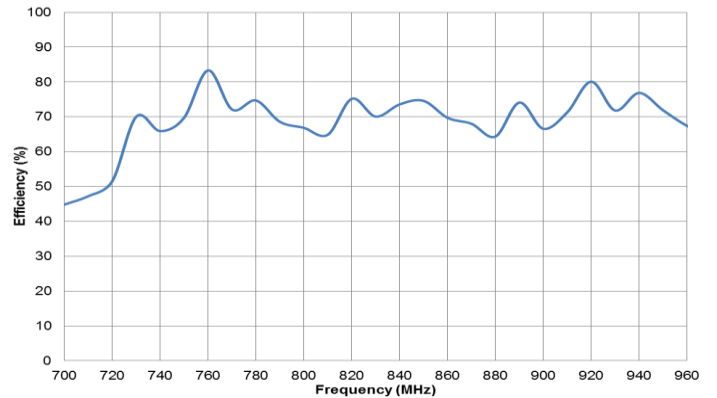


High Band VSWR

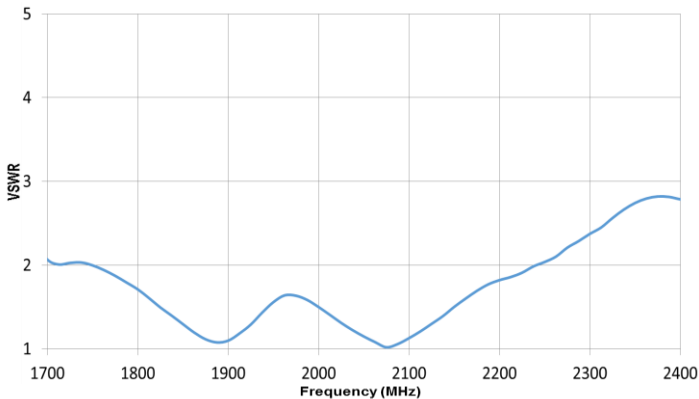


High Band Efficiency

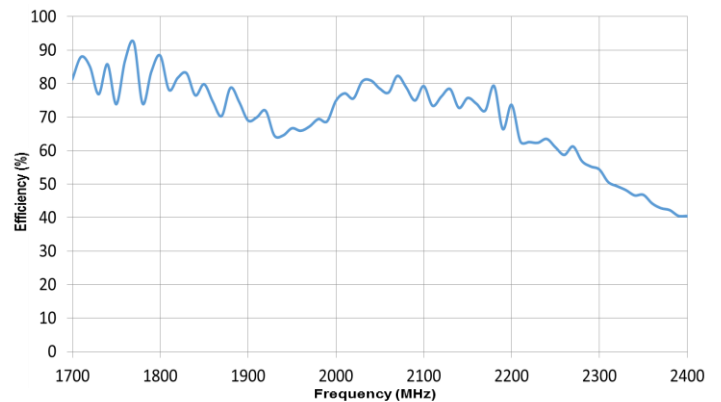

Band 7 VSWR

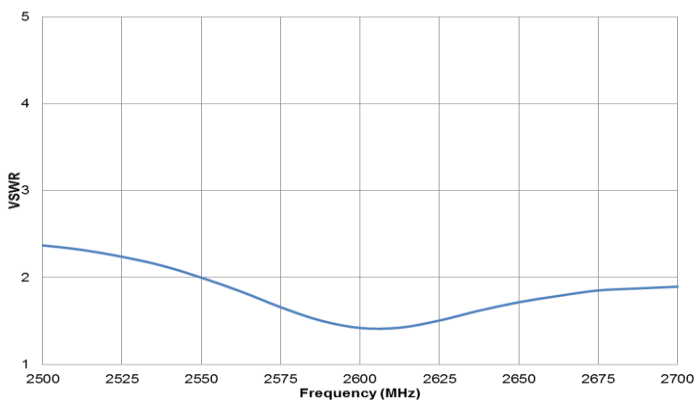

Band 7 Efficiency

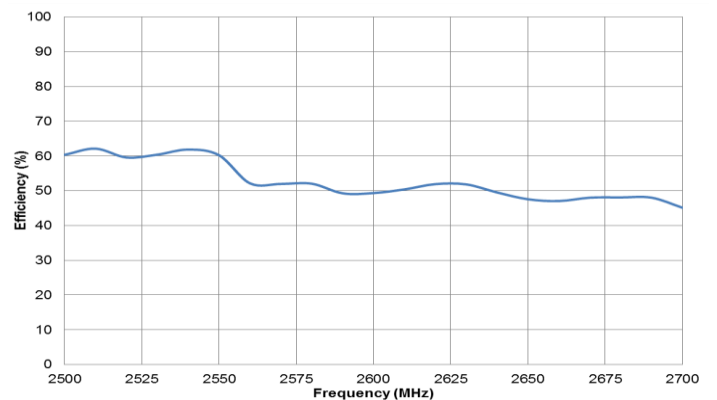


LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


VSWR and Efficiency Plots

Typical AP822601 performance 140 x 50 mm PCB


Band 40 VSWR

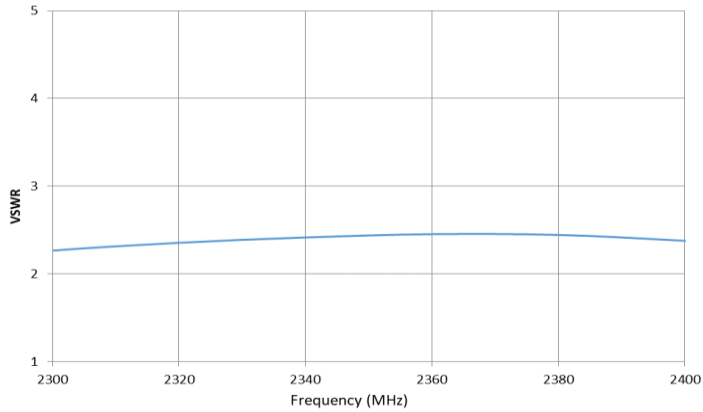


Band 40 Efficiency

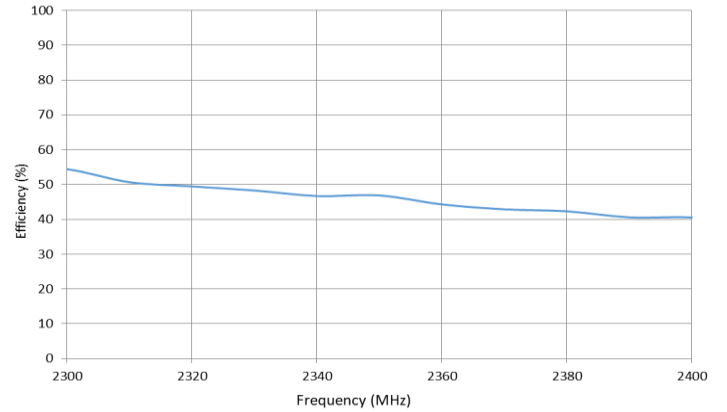

n78 VSWR

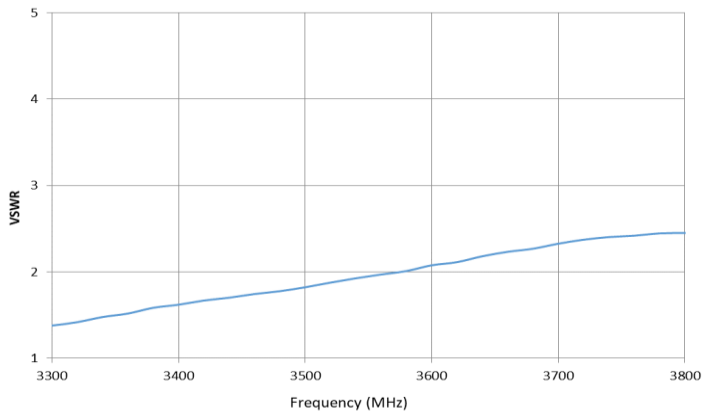


n78 Efficiency

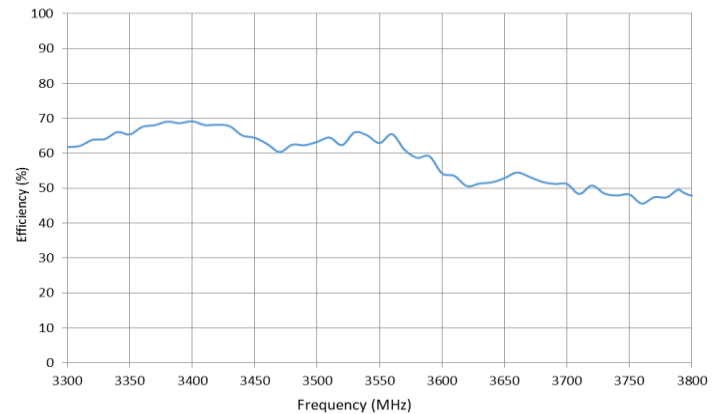




LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns – Low / High Band (LTE)




Typical AP822601 performance 140 x 50 mm PCB

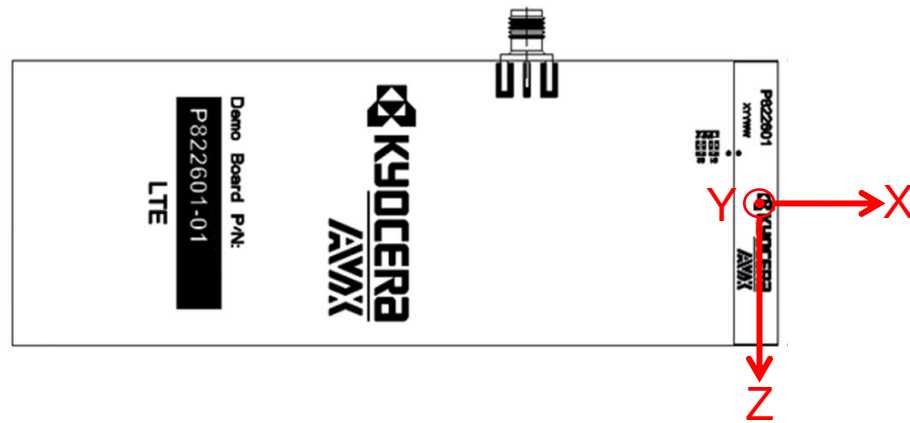

Low Band measured at
700, 750, 850, 900 MHz

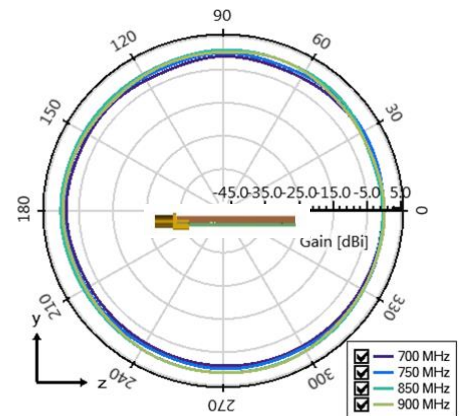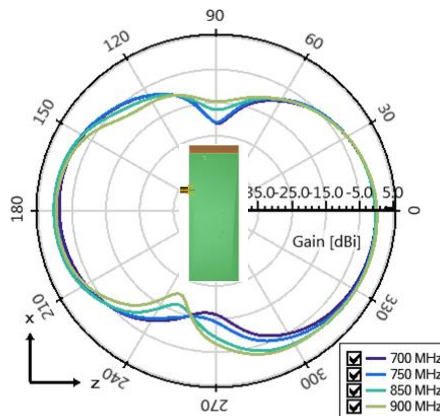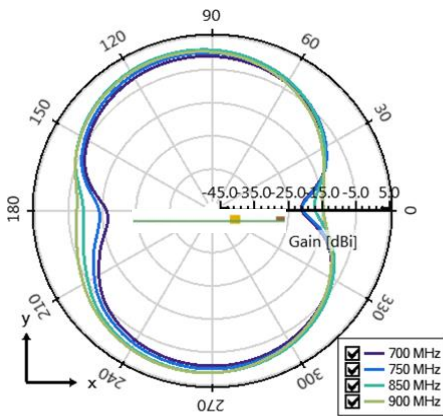


High Band measured at
1800, 1900, 850, 2100 MHz

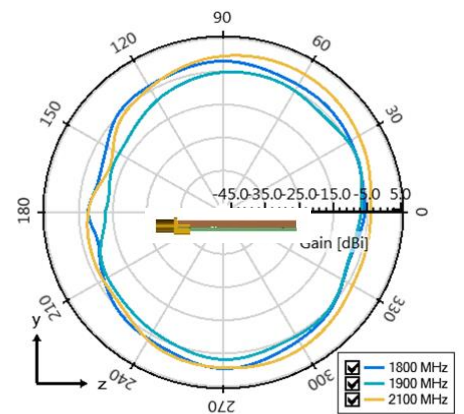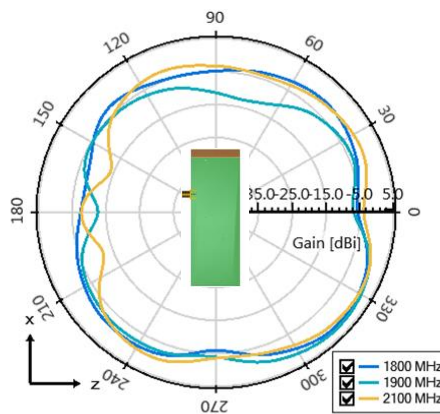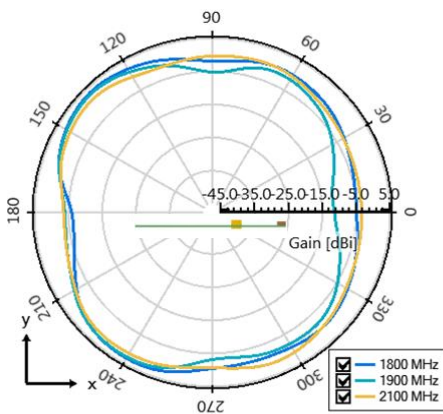




LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns – Band 40, Band 7




Typical AP822601 performance 140 x 50 mm PCB

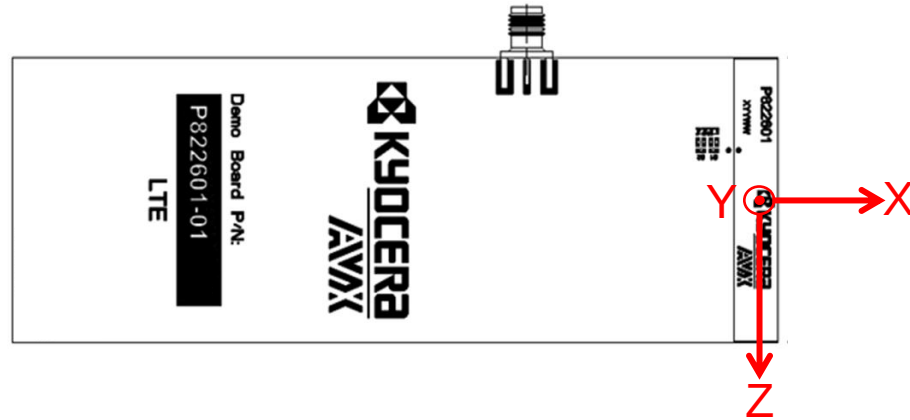

Band 40 measured at
2350 MHz

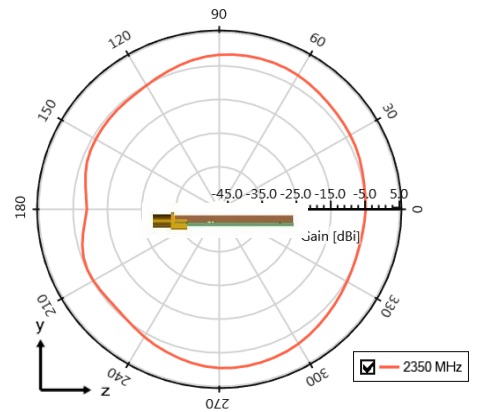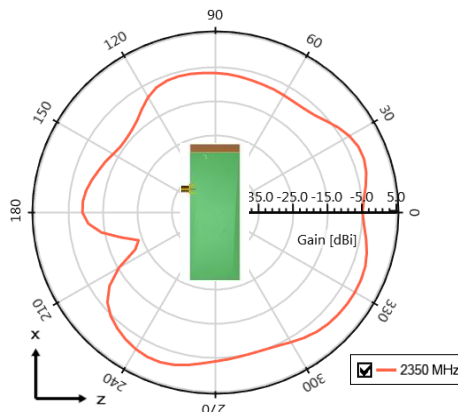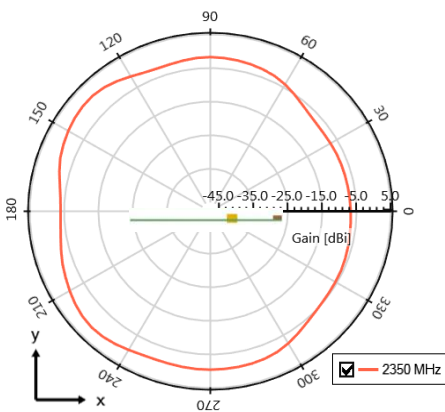



Band 7 measured at
2600 MHz

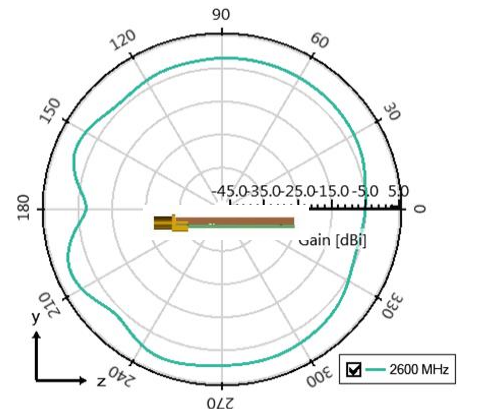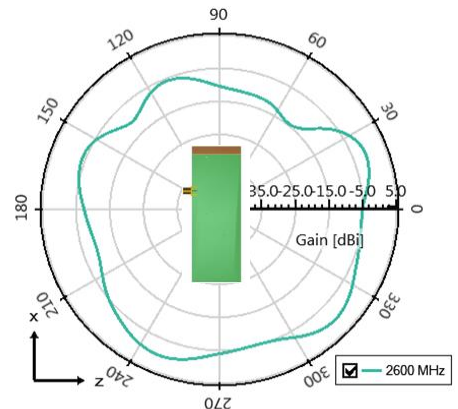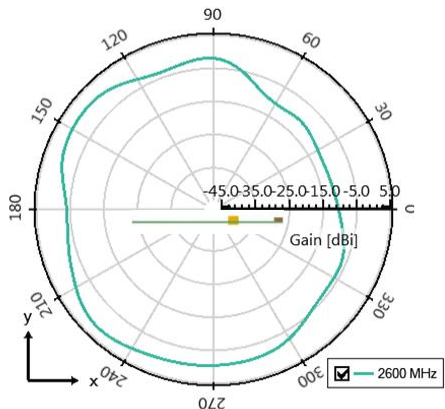

LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns – n78


Typical AP822601 performance 140 x 50 mm PCB

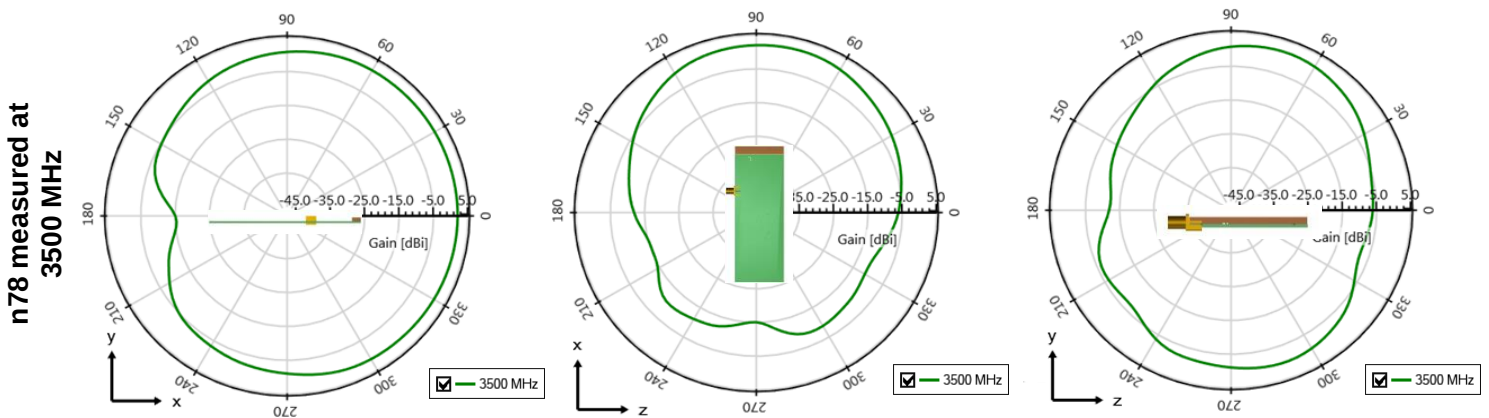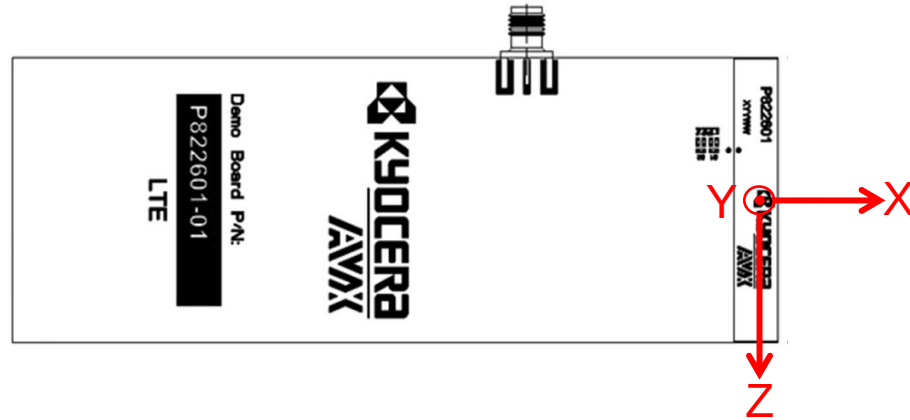

LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout (AP822601)

Typical layout dimensions (mm)

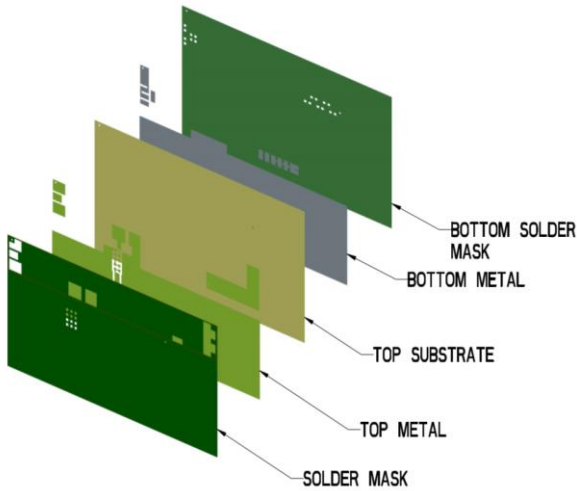


- Additional VIAS: Diam. 0.2mm to be placed around antenna, (no vias on transmission lines).
- Via holes must be covered by solder mask

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad

* uses the same layout but mirrored.


Default Pi Matching Network values with instructions can be found under Antenna Matching Network.

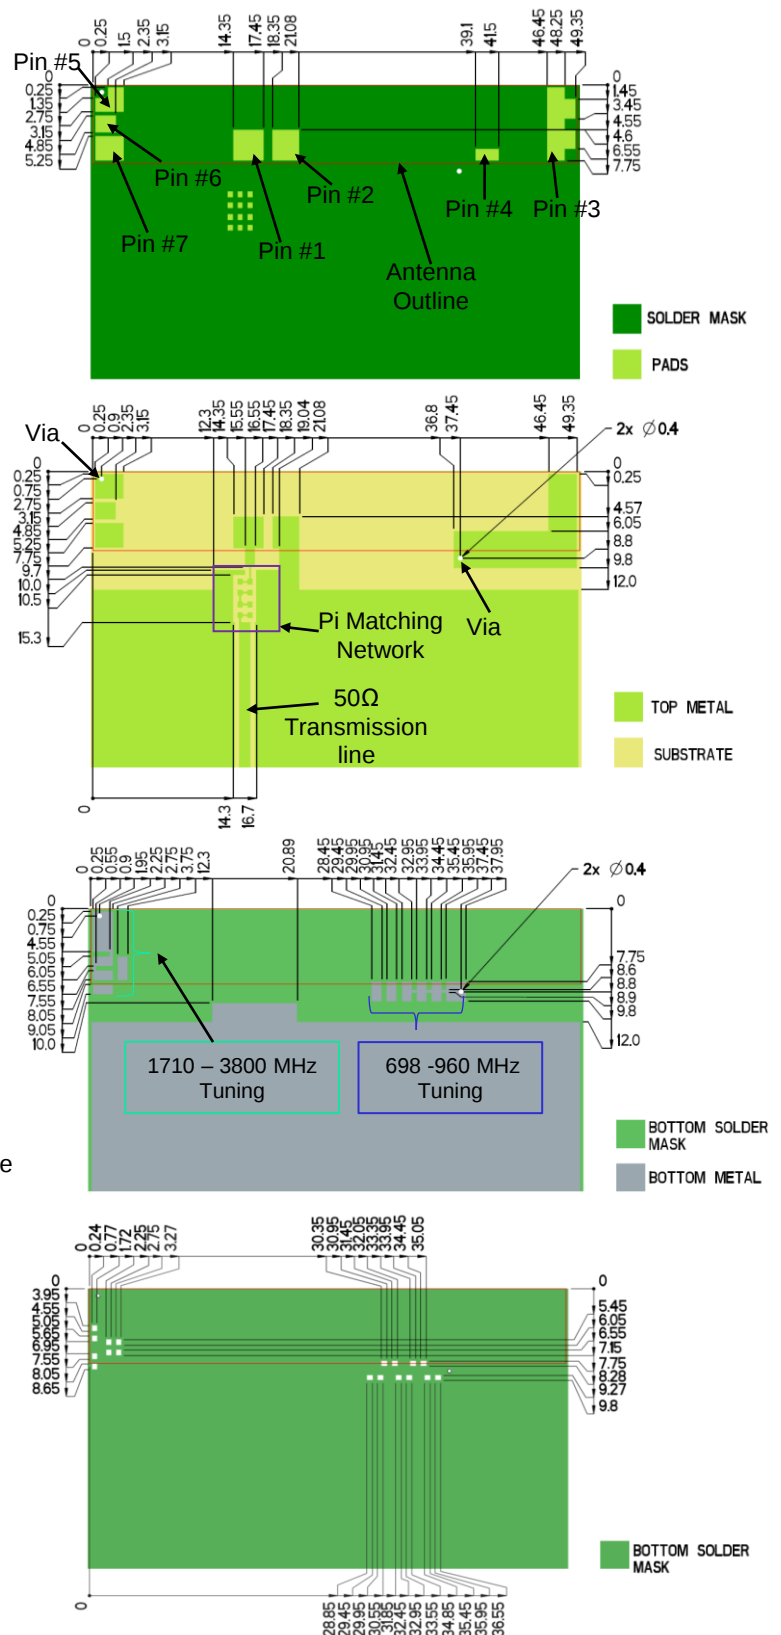


LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Matching Structure (AP822601)

Typical matching values on 140 x 50 mm PCB

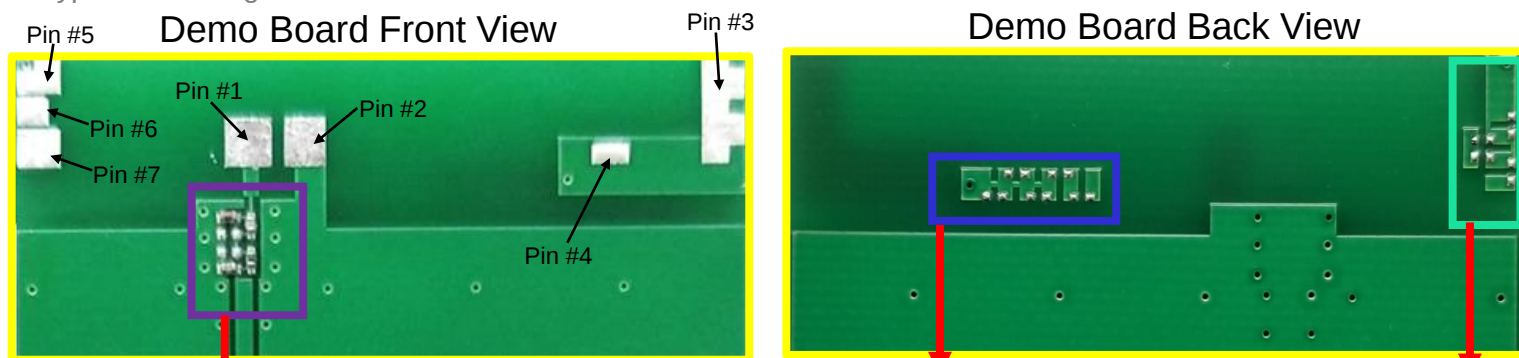

Antenna Matching




(Antenna Matching):
pads are directly inline with
the antenna feed trace.

698-960 MHz Tuning




1710-3800 MHz Tuning

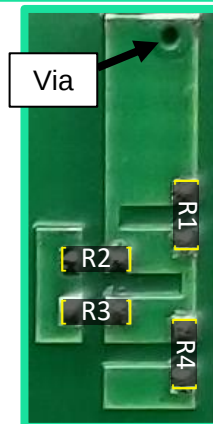

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad

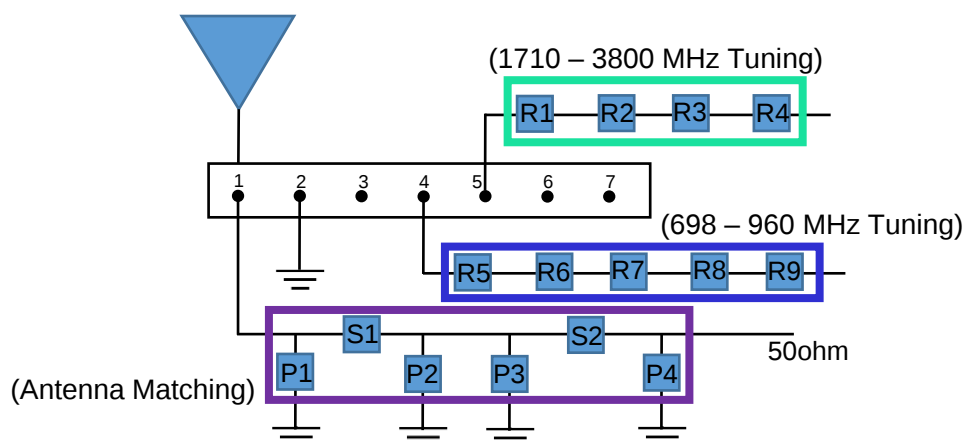

* uses same matching values

	P1	S1	P2	P3	S2	P4	R1-R4	R5-R9
Default Matching	24nH	2.4pF	DNI	DNI	1.0nH	0.3pF	DNI	DNI
Tolerance	± 20%	± 0.25pF	N/A	N/A	± 0.3nH	± 0.1pF	N/A	N/A

LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Antenna Matching Structure (AP822601)

Typical matching values on 140 x 50 mm PCB

Demo Board Back

1710-3800 MHz Tuning


698-960 MHz Tuning

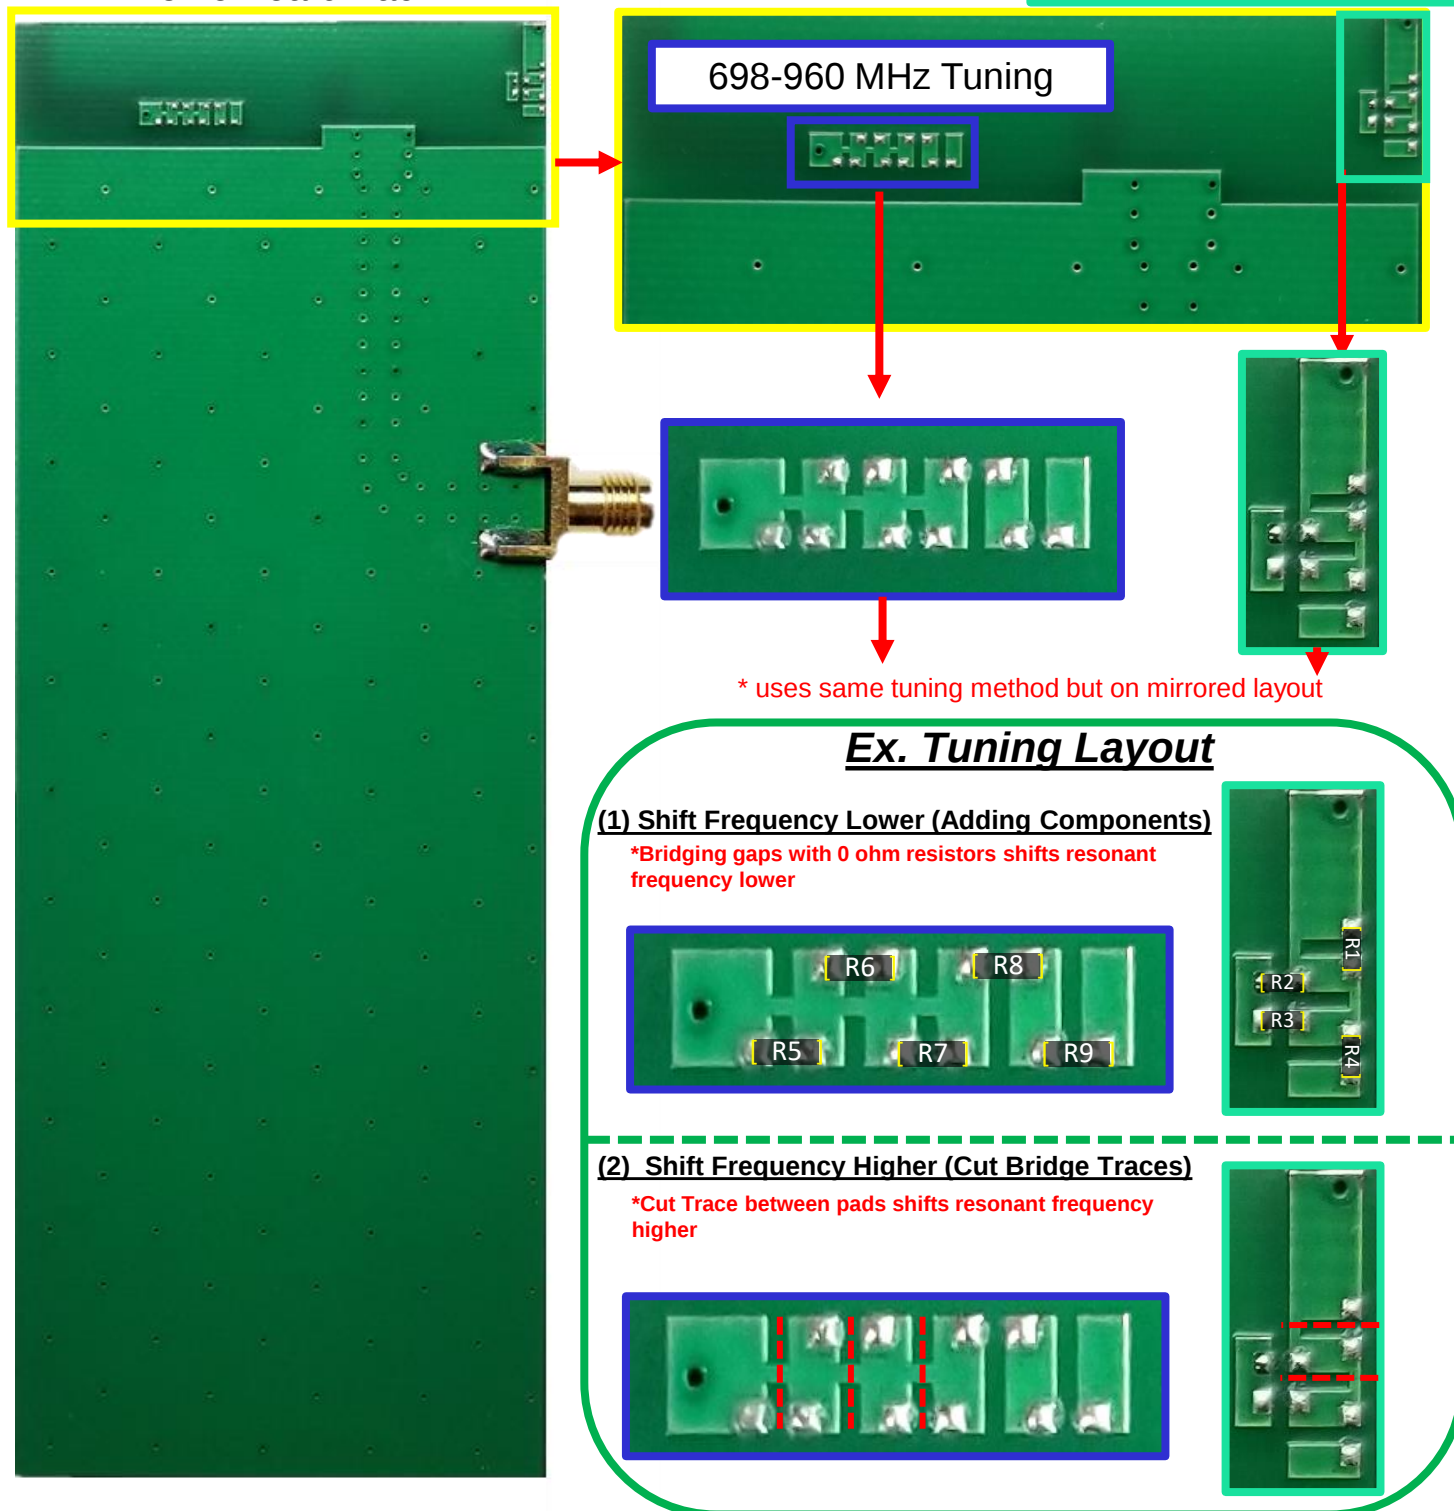

LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Demo Board (P822601-01)


Demo Board Front/Back View

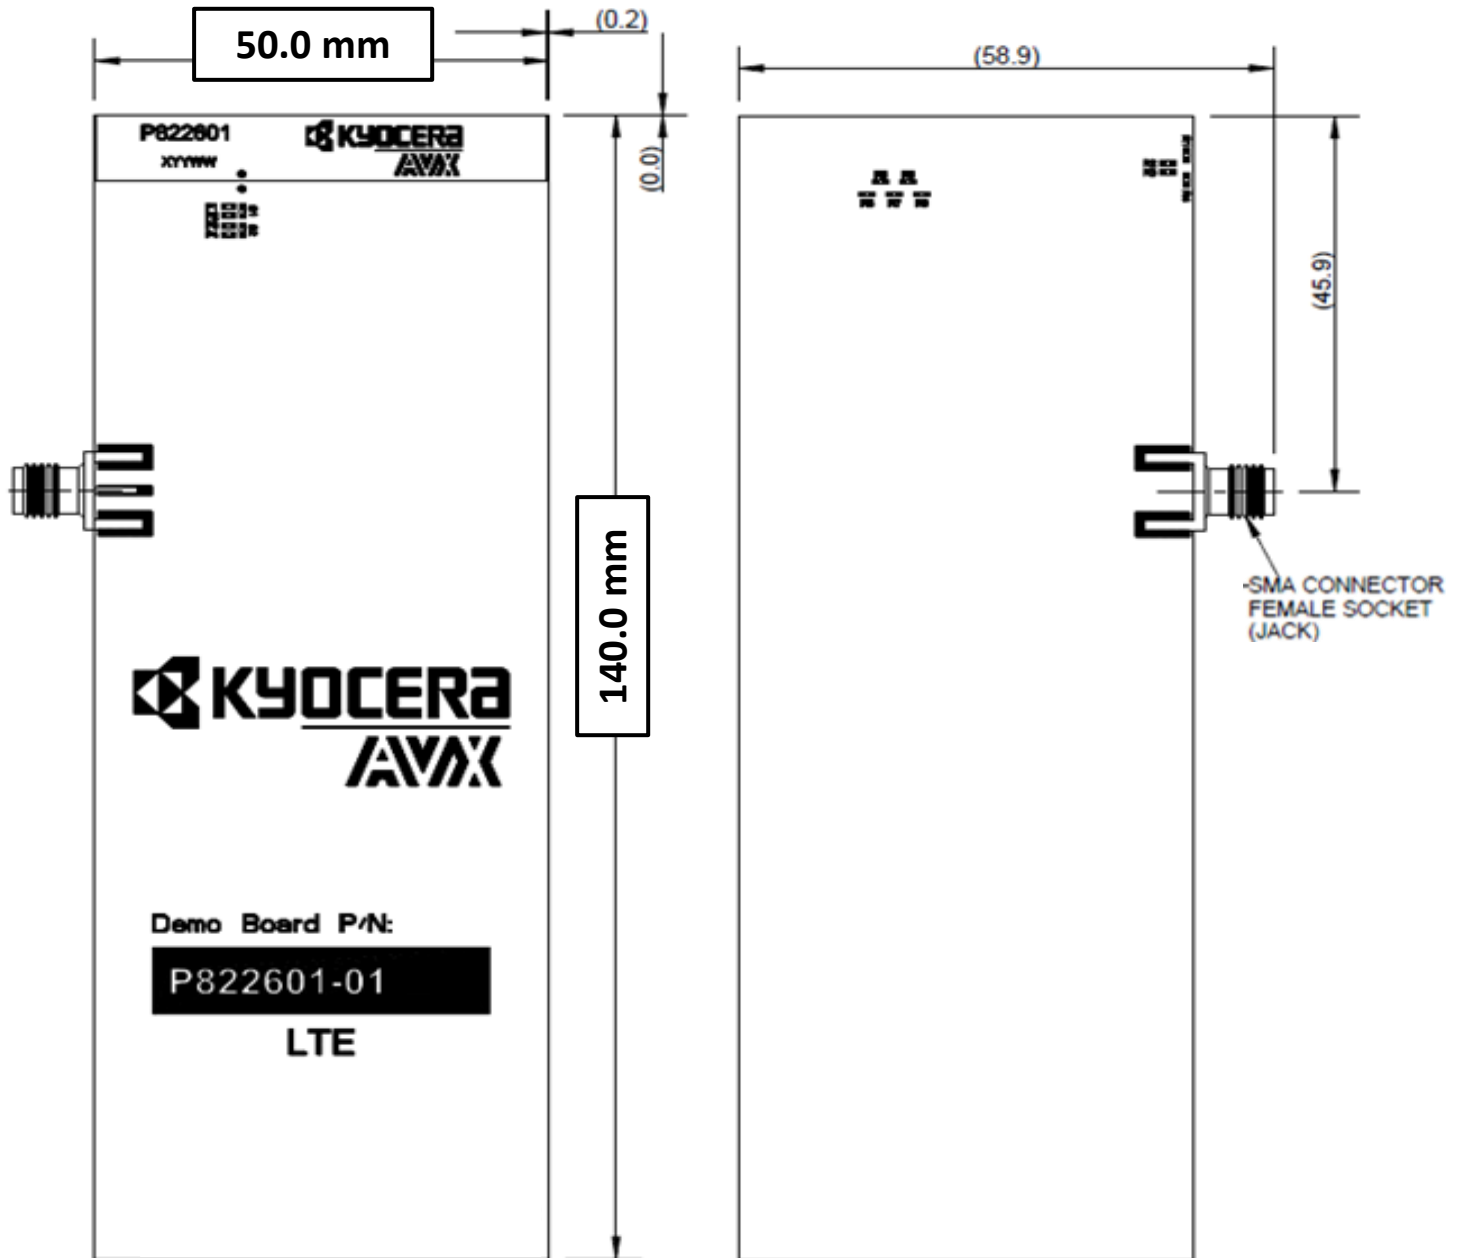

LTE/LPWA Universal Broadband Embedded Automotive Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Recommended Reflow Soldering Profile

The recommended method for soldering the antenna to the board is forced convection reflow soldering. The following suggestions provide information on how to optimize the reflow process for the FR4 antenna:

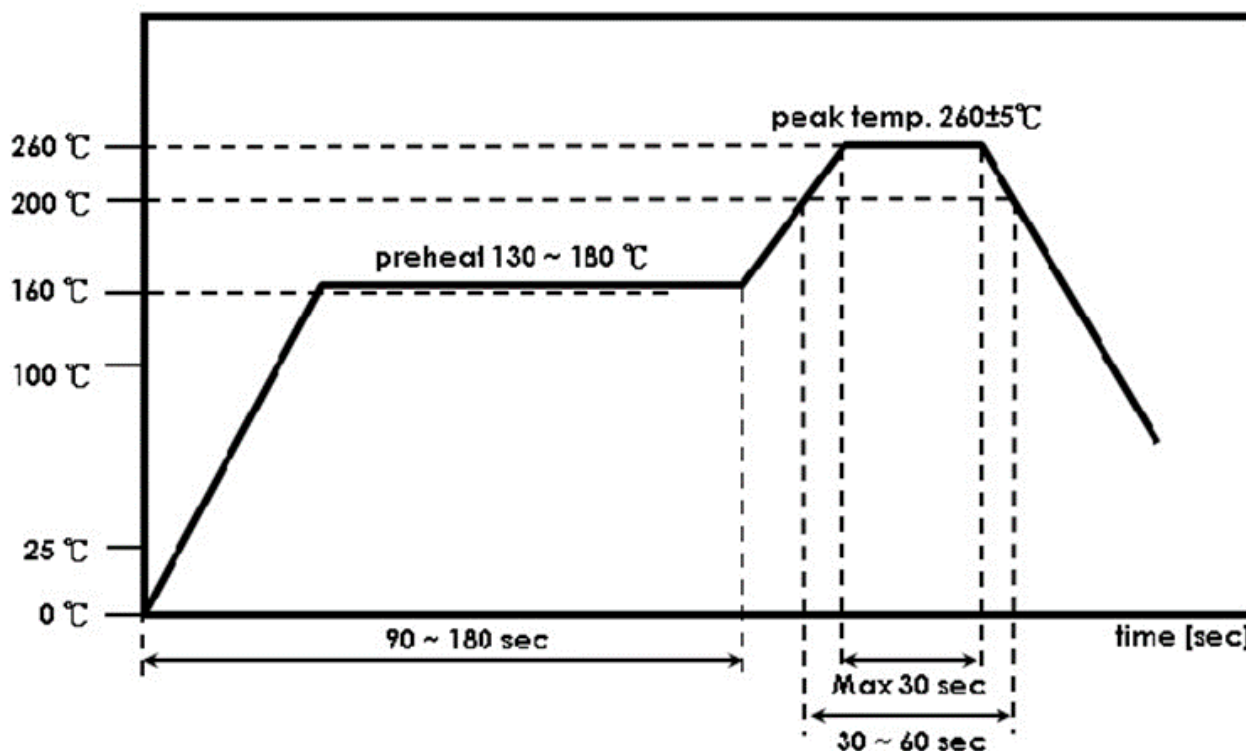

*Adjust the reflow duration to create good solder joints without raising the antenna temperature beyond the allowed maximum of 260° C.