



TAOGLAS®



Datasheet

Phoenix II

Part No:
GSA.8835.A.101111

Description:

5G/4G I-Bar Adhesive Mount Fully IP67 Rated Low Profile Wideband Antenna

Features:

5G/4G Adhesive Mount Antenna
600-6000MHz Wideband Operation
IP67 Rated Enclosure
Dimensions: 105 x 30 x 7.9mm
Connector: SMA Male Straight
Cable: 1m of RG-174
RoHS & REACH Compliant

| | |
|----------------------------|----|
| 1. Introduction | 3 |
| 2. Specifications | 4 |
| 3. Antenna Characteristics | 6 |
| 4. Radiation Patterns | 8 |
| 5. Mechanical Drawing | 25 |
| 6. Packaging | 26 |
| <hr/> | |
| Changelog | 27 |

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The Taoglas GSA.8835 is a fully IP67 rated waterproof 5G/4G external adhesive mount antenna designed for use with all Cellular modules worldwide including new 5G bands. The GSA.8835 has been designed as a fully IP67 waterproof rated enclosure and with extended wideband cellular frequency range coverage of 600-6000MHz, the newly designed GSA.8835 is ready for use at all cellular bands across 5G/4G/3G/2G.

Typical Applications Include:

- Transportation
- Agriculture
- Autonomous Vehicles/Robotics

Providing excellent efficiency and gain, this low profile(7.9mm) antenna is ideal in areas where space is at a premium. The Phoenix II is fully IP67 rated, making it an ideal solution for outdoor applications. The GSA.8835 can be mounted on glass or plastic and comes with a strong 3M 1600T adhesive already adhered to the bottom side of the antenna for ease of installation.

The Cable length and connector type is fully customizable, for more information or installation instructions, please contact your regional Taoglas Customer Support Team.

2. Specifications

Electrical

| Band | Frequency (MHz) | Efficiency (%) | Average Gain (dB) | Peak Gain (dBi) | Impedance | Polarization | Radiation Pattern | Max. input power |
|---|-----------------|----------------|-------------------|-----------------|-----------|--------------|-------------------|------------------|
| 5GNR/4G Band 71 | 617-698 | 37.8 | -4.22 | 0.95 | 50 Ω | Linear | Omni | 2W |
| 4G/3G Band 12,13,14,17,28,29 | 698-806 | 52.2 | -2.82 | 2.44 | | | | |
| 4G/3G Band 5,8,18,19,20,26,27 | 824-960 | 64.1 | -1.93 | 2.59 | | | | |
| 5GNR/4G Band 21,32,74,75,76 | 1427-1518 | 82.6 | -0.83 | 3.25 | | | | |
| 4G/3G Band 1,2,3,4,9,23,25,35,39,66 | 1710-2200 | 76.9 | -1.14 | 4.12 | | | | |
| 4G/3G Band 7,38,41 | 2490-2690 | 65.8 | -1.82 | 3.78 | | | | |
| 5GNR/4G Band 22,42,48,77,78 | 3300-3500 | 62.9 | -2.01 | 3.79 | | | | |
| 5GNR/4G Band 43,48,77,78 | 3500-4200 | 39.3 | -4.06 | 3.70 | | | | |
| LTE5200/ Wi-Fi 5800 | 5150-5925 | 51.8 | -2.86 | 2.81 | | | | |

Mechanical

| | |
|------------|-------------------|
| Dimensions | 30*105*7.9mm |
| Casing | PC+ABS |
| Cable | RG-174, 1000mm |
| Connector | SMA Male Straight |
| Adhesive | 3M 1600T |
| Weight | 35g |

Environmental


| | |
|--------------------|----------------------------|
| Ingress Protection | IP67 |
| Temperature Range | -40°C to 85°C |
| Humidity | Non-condensing 65°C 95% RH |
| Shock (Drop Test) | 1m drop on concrete 6 axes |
| Cable Pull | 8kgf |

| 5G/4G Bands | | | |
|-------------|---|------------------|---------|
| Band Number | 5GNR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA | | |
| | Uplink | Downlink | Covered |
| B1 | 1920 to 1980 | 2110 to 2170 | ✓ |
| B2 | 1850 to 1910 | 1930 to 1990 | ✓ |
| B3 | 1710 to 1785 | 1805 to 1880 | ✓ |
| B4 | 1710 to 1755 | 2110 to 2155 | ✓ |
| B5 | 824 to 849 | 869 to 894 | ✓ |
| B7 | 2500 to 2570 | 2620 to 2690 | ✓ |
| B8 | 880 to 915 | 925 to 960 | ✓ |
| B9* | 1749.9 to 1784.9 | 1844.9 to 1879.9 | ✓ |
| B11 | 1427.9 to 1447.9 | 1475.9 to 1495.9 | ✓ |
| B12 | 699 to 716 | 729 to 746 | ✓ |
| B13 | 777 to 787 | 746 to 756 | ✓ |
| B14 | 788 to 798 | 758 to 768 | ✓ |
| B17 | 704 to 716 | 734 to 746 | ✓ |
| B18 | 815 to 830 | 860 to 875 | ✓ |
| B19 | 830 to 845 | 875 to 890 | ✓ |
| B20 | 832 to 862 | 791 to 821 | ✓ |
| B21 | 1447.9 to 1462.9 | 1495.9 to 1510.9 | ✓ |
| B22* | 3410 to 3490 | 3510 to 3590 | ✓ |
| B23* | 2000 to 2020 | 2180 to 2200 | ✓ |
| B24 | 1626.5 to 1660.5 | 1525 to 1559 | ✓ |
| B25 | 1850 to 1915 | 1930 to 1995 | ✓ |
| B26 | 814 to 849 | 859 to 894 | ✓ |
| B27* | 807 to 824 | 852 to 869 | ✓ |
| B28 | 703 to 748 | 758 to 803 | ✓ |
| B29 | | 717 to 728 | ✓ |
| B30 | 2305 to 2315 | 2350 to 2360 | ✓ |
| B31 | 452.5 to 457.5 | 462.5 to 467.5 | ✗ |
| B32 | | 1452 to 1496 | ✓ |
| B34 | | 2010 to 2025 | ✓ |
| B35 | | 1850 to 1910 | ✓ |
| B36 | | 1930 to 1990 | ✓ |
| B37 | | 1910 to 1930 | ✓ |
| B38 | | 2570 to 2620 | ✓ |
| B39 | | 1880 to 1920 | ✓ |
| B40 | | 2300 to 2400 | ✓ |
| B41 | | 2496 to 2690 | ✓ |
| B42 | | 3400 to 3600 | ✓ |
| B43 | | 3600 to 3800 | ✓ |
| B45 | | 1447 to 1467 | ✓ |
| B46 | | 5150 to 5925 | ✓ |
| B47 | | 5855 to 5925 | ✓ |
| B48 | | 3550 to 3700 | ✓ |
| B49 | | 3550 to 3700 | ✓ |
| B50 | | 1432 to 1517 | ✓ |
| B51 | | 1427 to 1432 | ✓ |
| B52 | | 3300 to 3400 | ✓ |
| B53 | | 2483.5 to 2495 | ✓ |
| B65 | 1920 to 2010 | 2110 to 2200 | ✓ |
| B66 | 1710 to 1780 | 2110 to 2200 | ✓ |
| B68 | 698 to 728 | 753 to 783 | ✓ |
| B69 | | 2570 to 2620 | ✓ |
| B70 | 1695 to 1710 | 1995 to 2020 | ✓ |
| B71 | 663 to 698 | 617 to 652 | ✓ |
| B72 | 451 to 456 | 461 to 466 | ✗ |
| B73 | 450 to 455 | 460 to 465 | ✗ |
| B74 | 1427 to 1470 | 1475 to 1518 | ✓ |
| B75 | | 1432 to 1517 | ✓ |
| B76 | | 1427 to 1432 | ✓ |
| B77 | | 3300 to 4200 | ✓ |
| B78 | | 3300 to 3800 | ✓ |
| B79 | | 4400 to 5000 | ✓ |
| B85 | 698 to 716 | 728 to 746 | ✓ |
| B87 | 410 to 415 | 420 to 425 | ✗ |
| B88 | 412 to 417 | 422 to 427 | ✗ |


* Covered Bands represent at least 20% efficiency

3. Antenna Characteristics


3.1 Return Loss

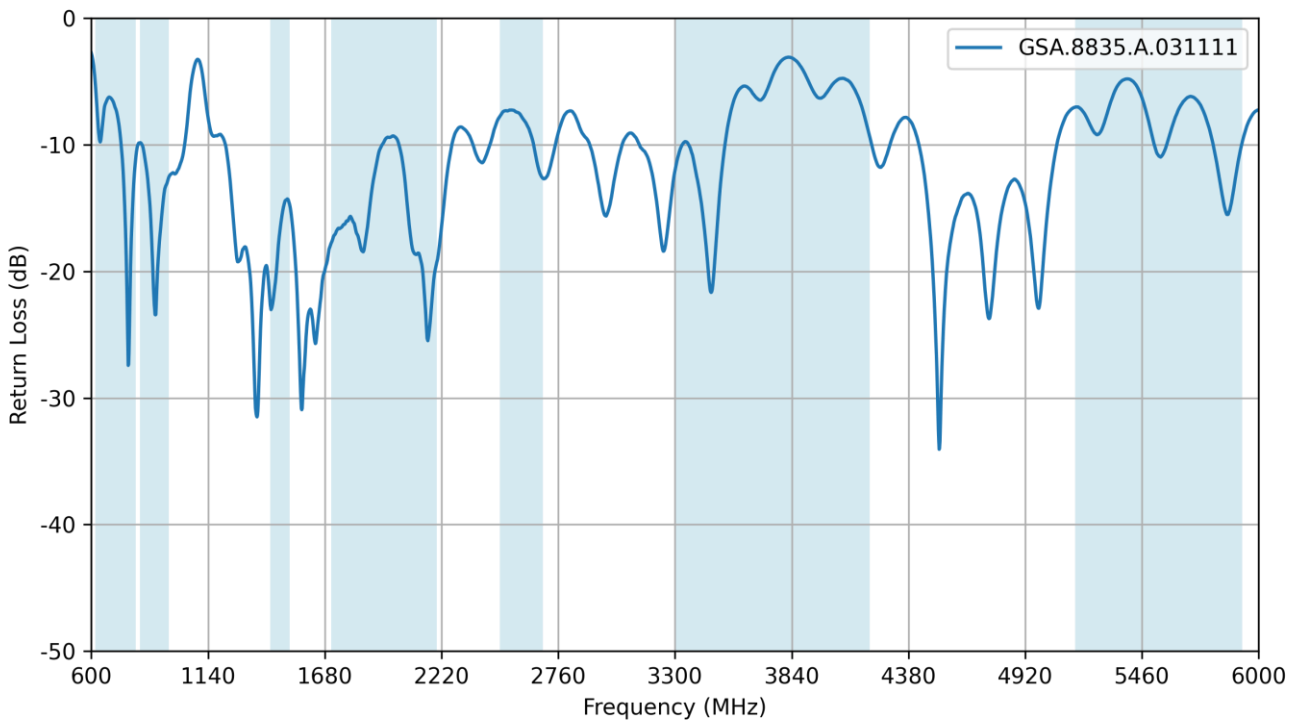


3.2 Efficiency

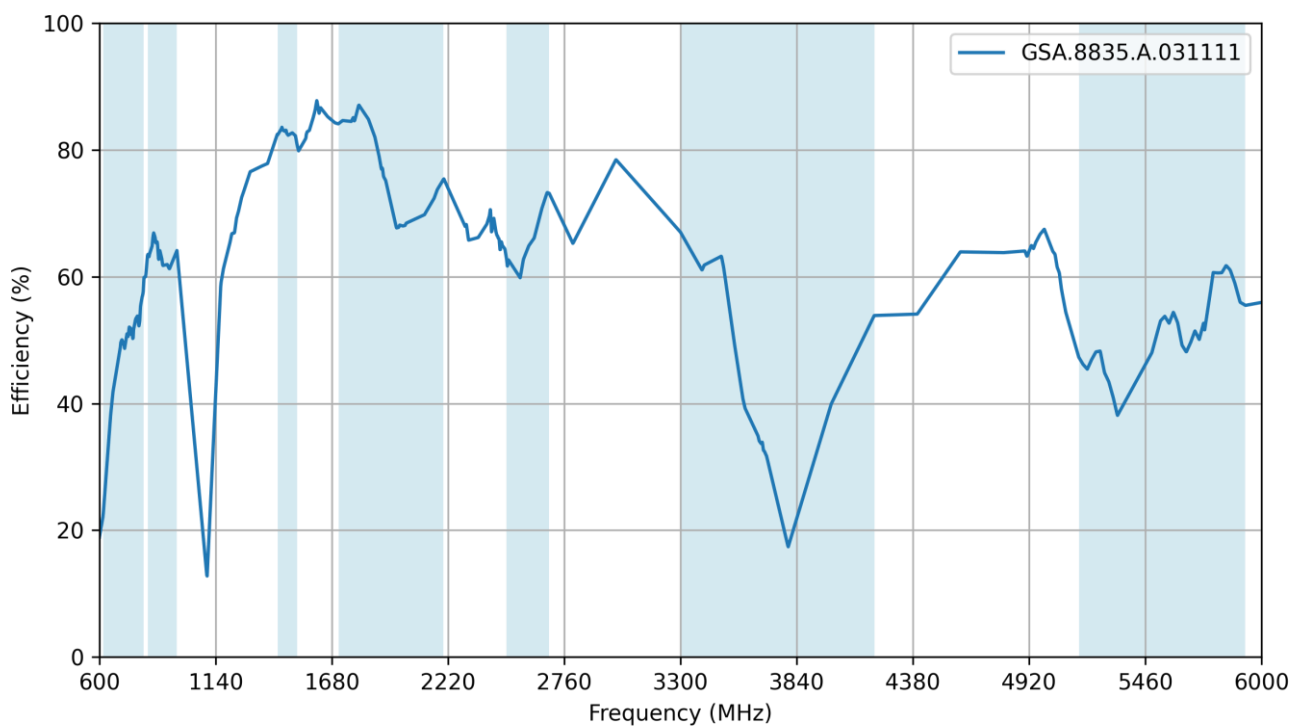

3.3 Average Gain

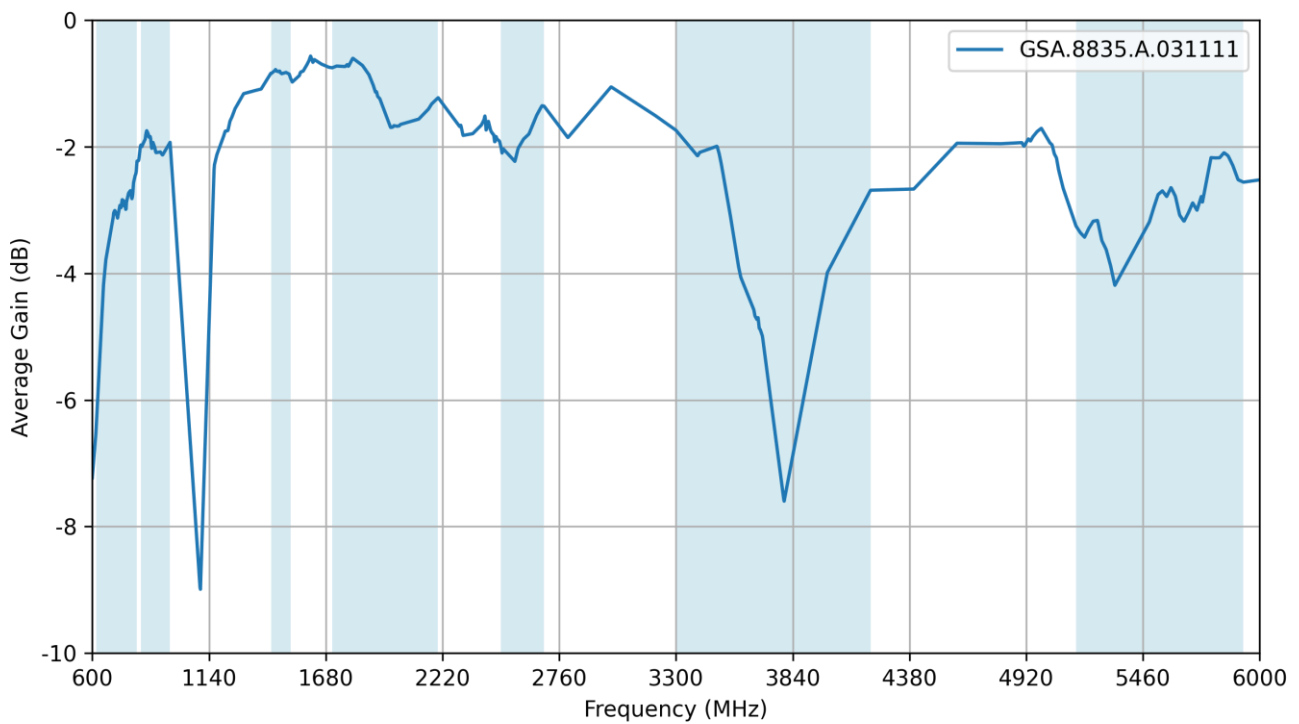

3.4 Peak Gain

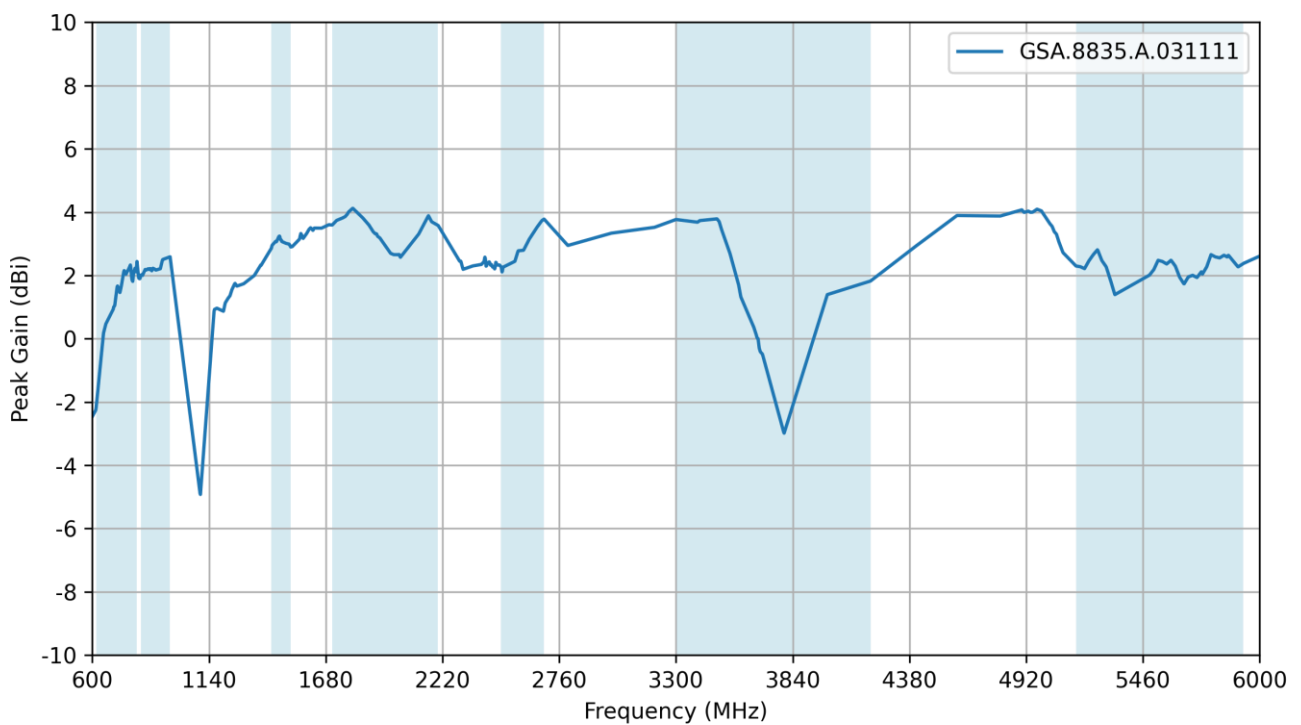

4. Radiation Patterns


4.1 Test Setup




Free space

4.2 3D and 2D Radiation Patterns


617MHz

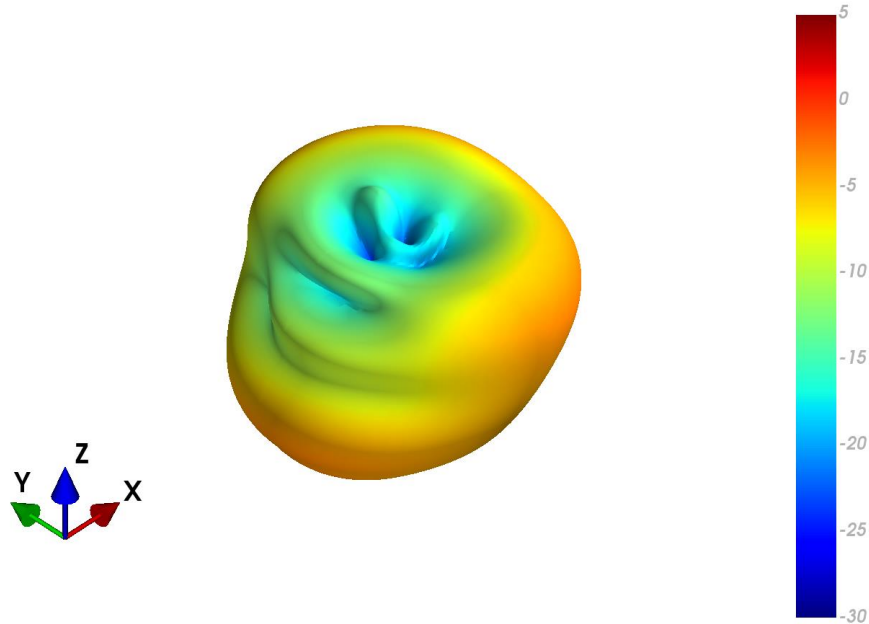


XZ Plane

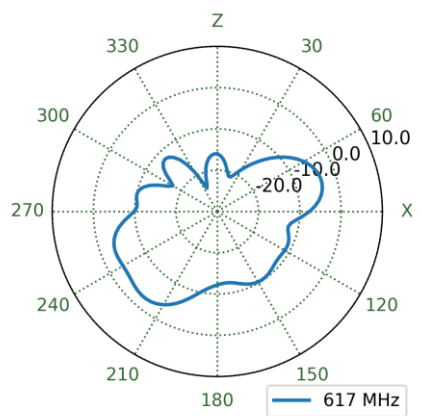




YZ Plane

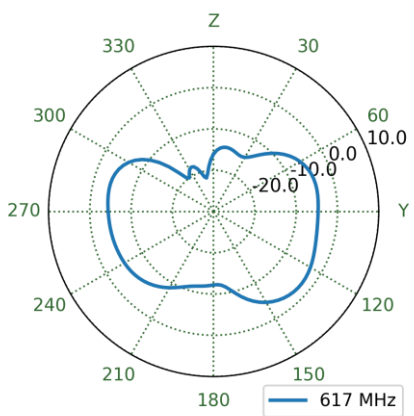


XY Plane

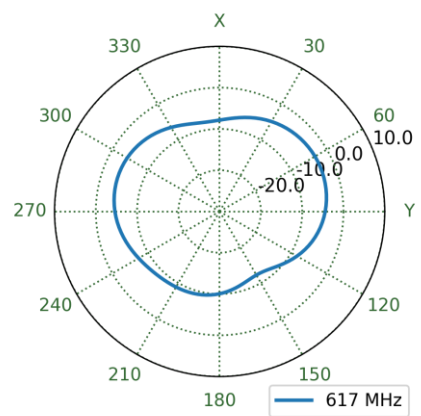


650MHz

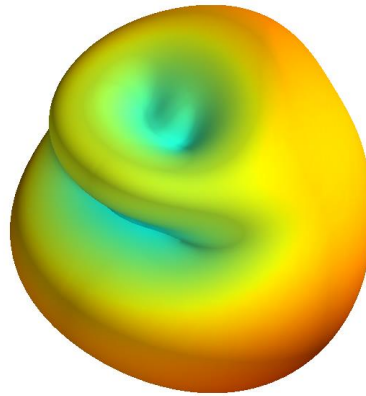


XZ Plane

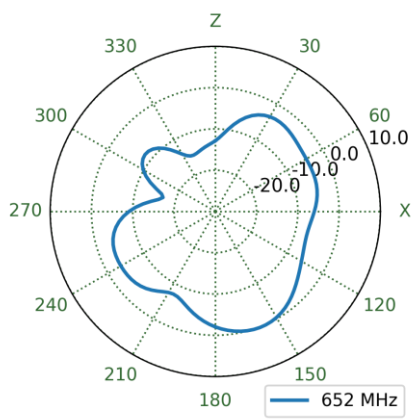



YZ Plane

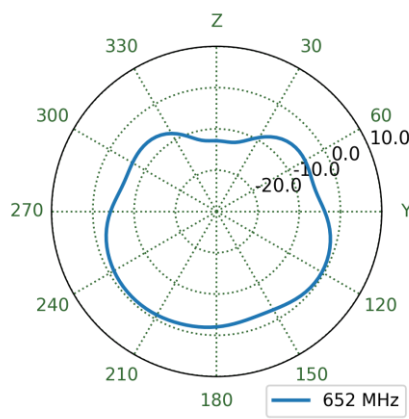


XY Plane

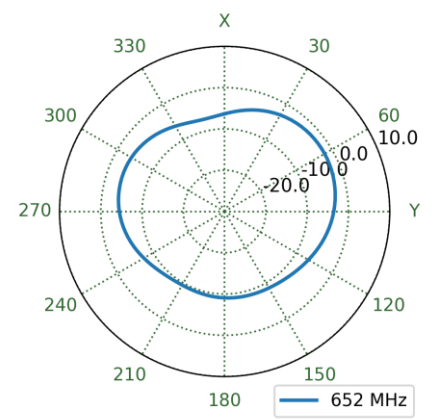


750MHz

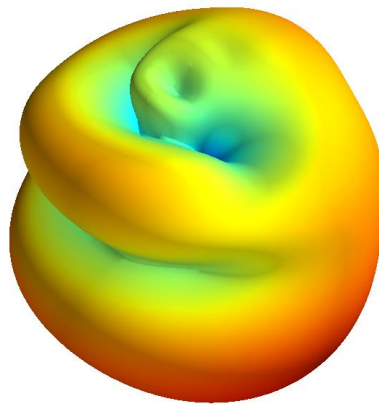


XZ Plane

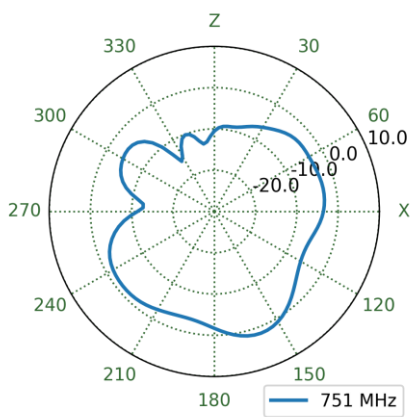




YZ Plane

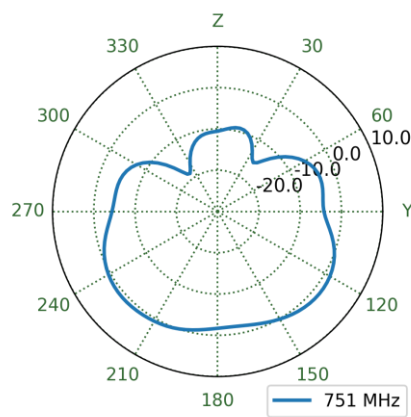


XY Plane

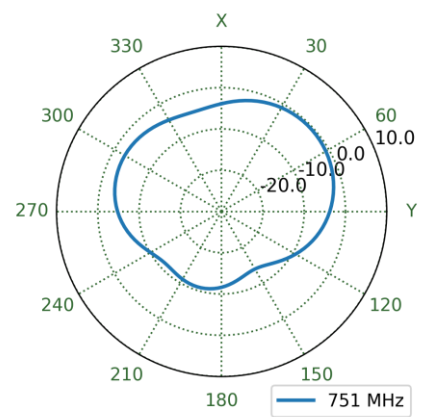


824MHz

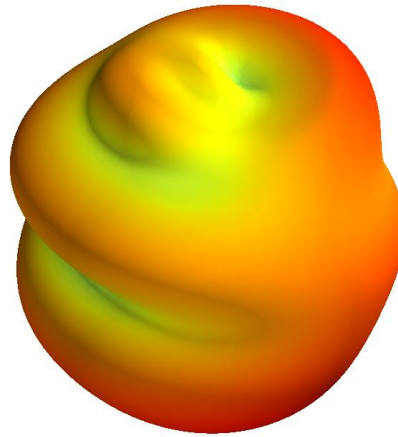


XZ Plane

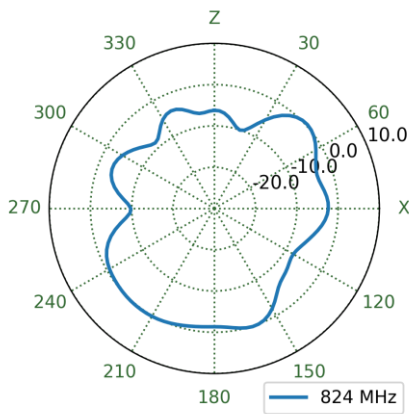




YZ Plane

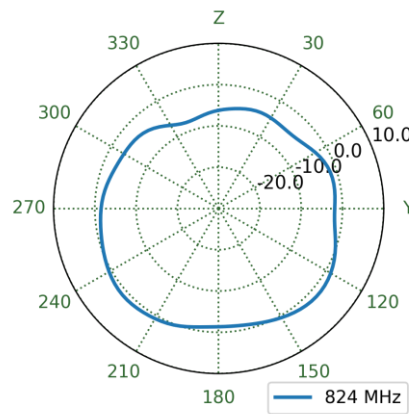


XY Plane

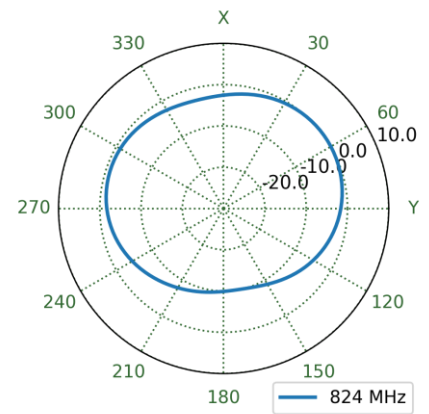


960MHz

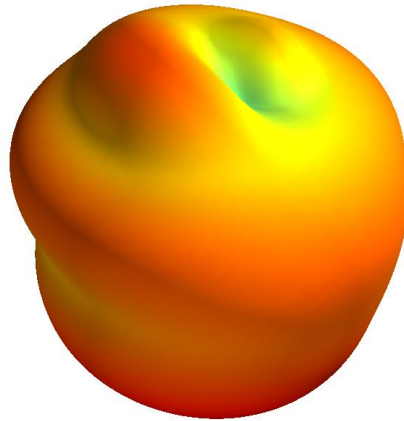


XZ Plane

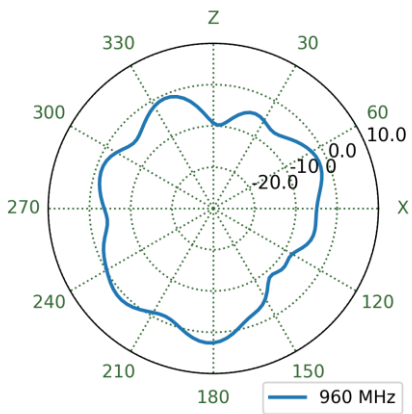



YZ Plane

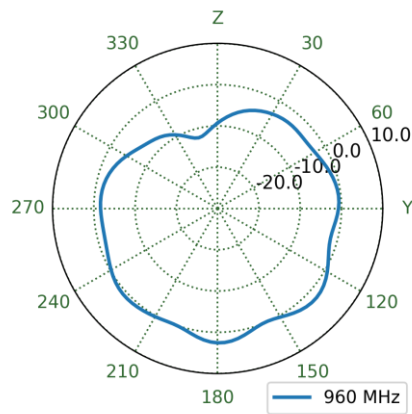


XY Plane

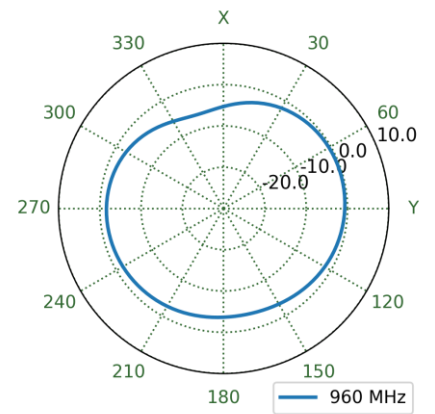


1710MHz

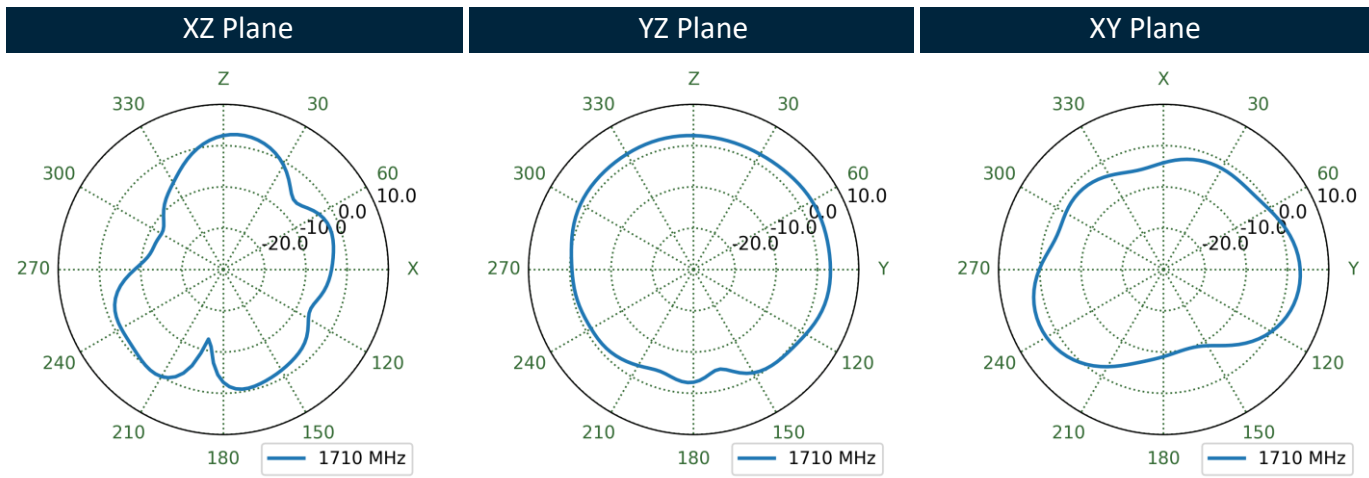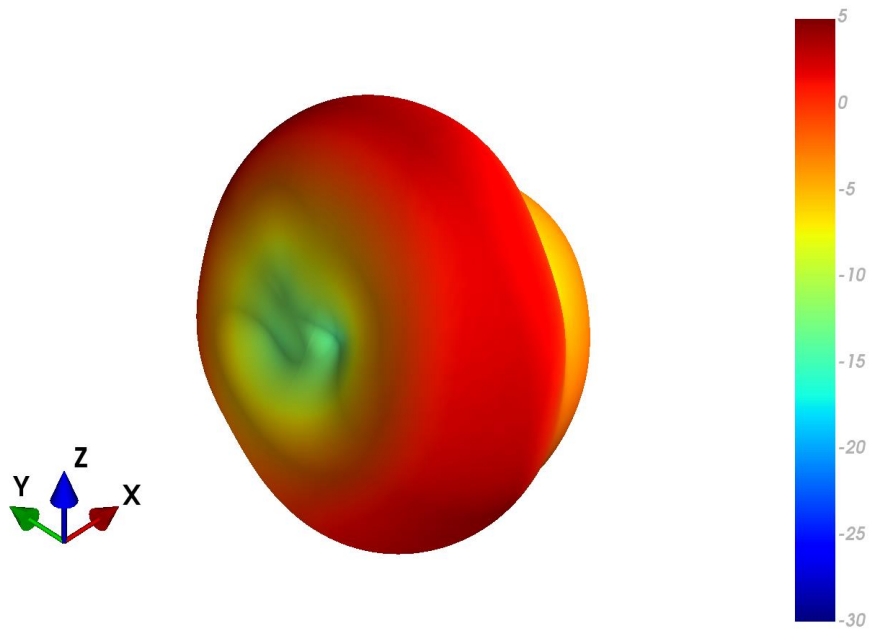


1950MHz

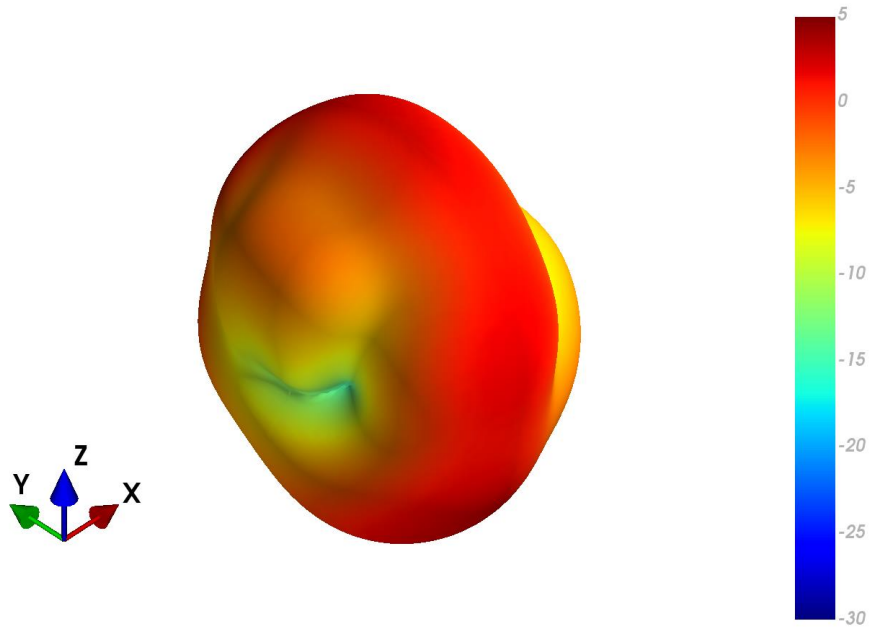


XZ Plane

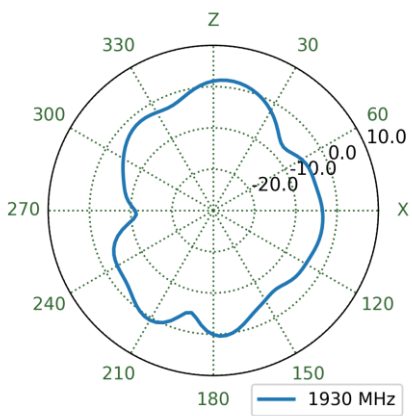


YZ Plane

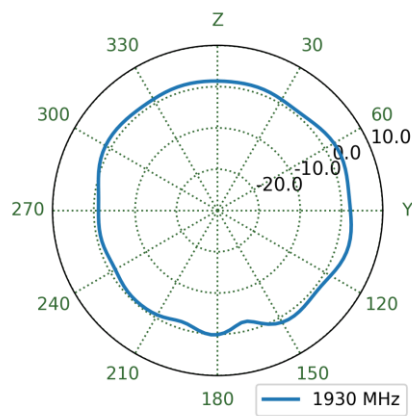


XY Plane

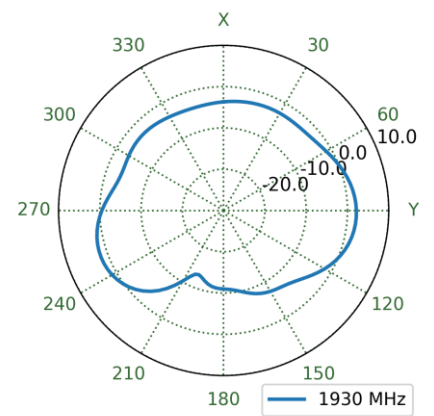


2200MHz

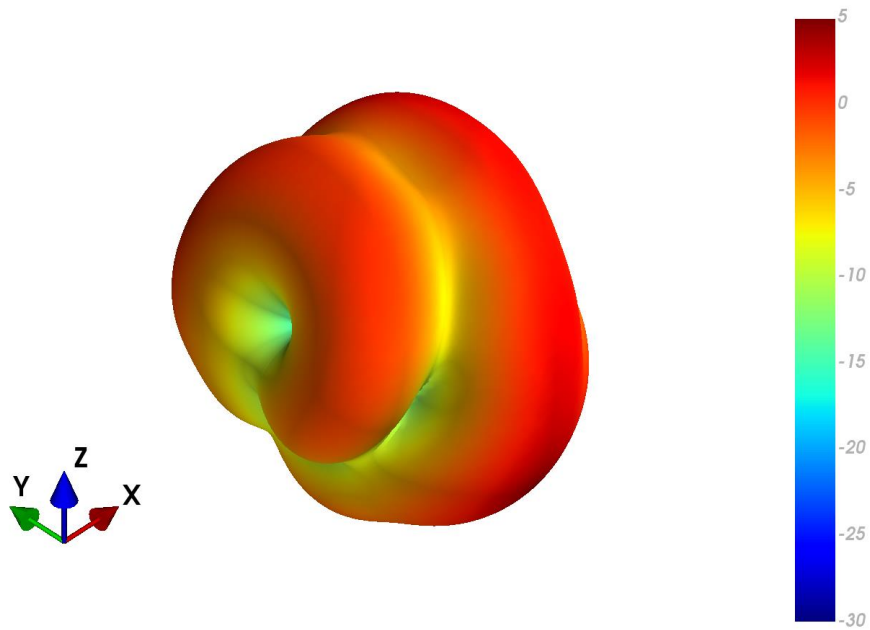


XZ Plane

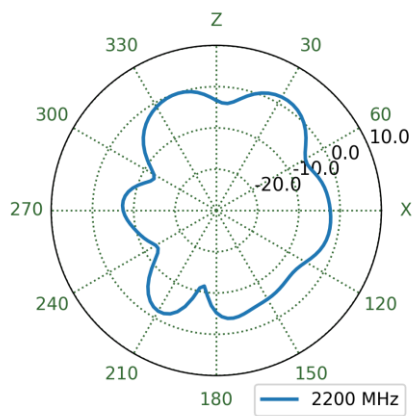



YZ Plane

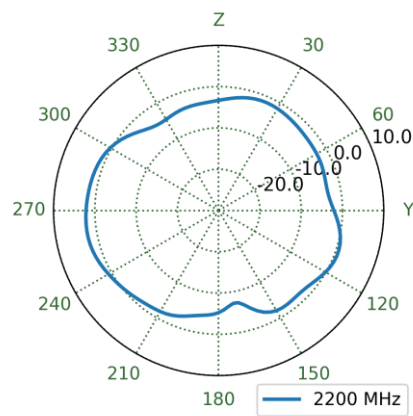


XY Plane

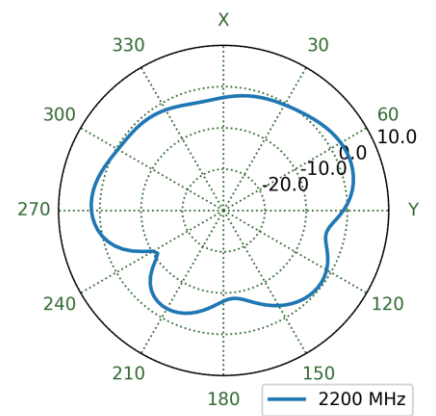


2500MHz

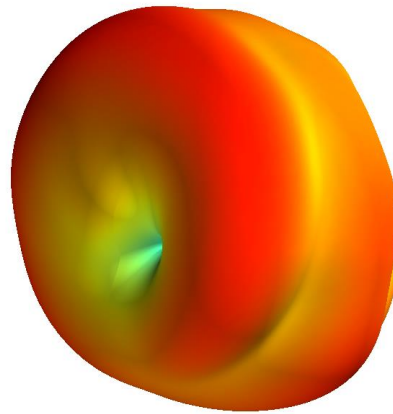


XZ Plane

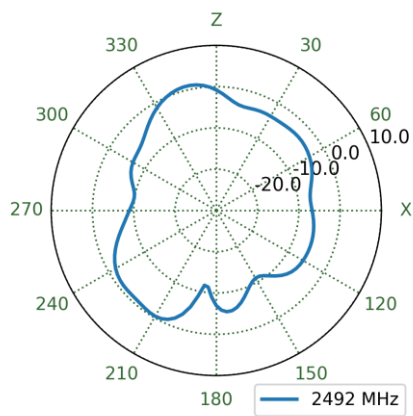


YZ Plane

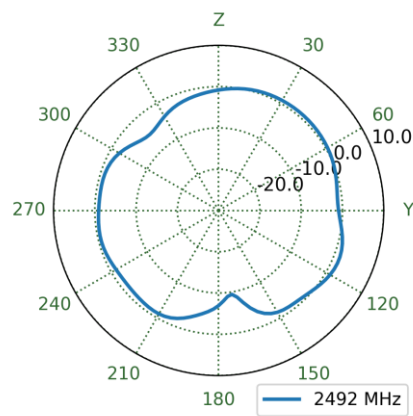


XY Plane

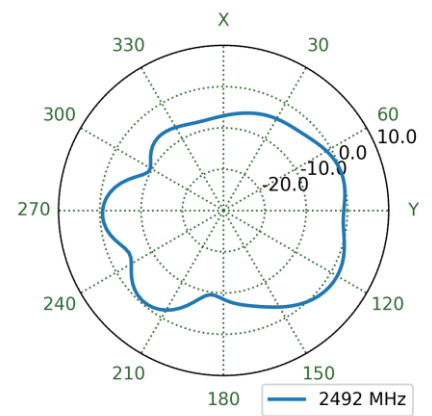


2690MHz

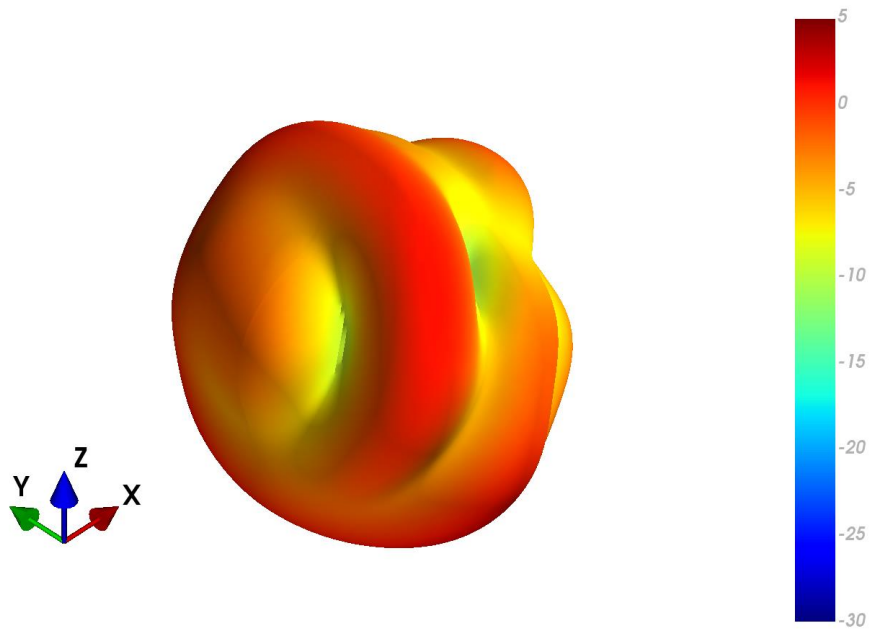


XZ Plane

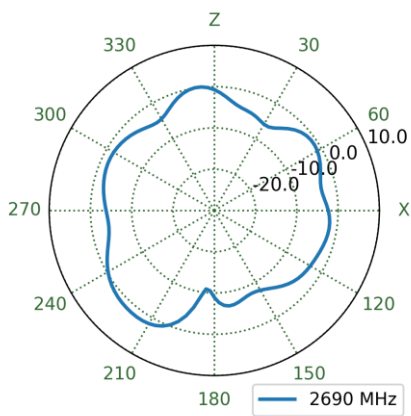


YZ Plane

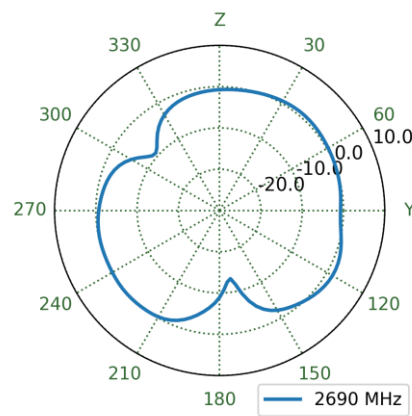


XY Plane

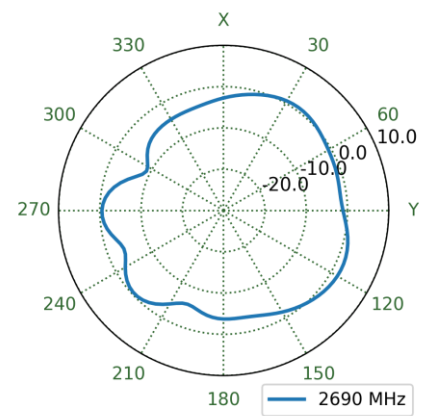


3300MHz

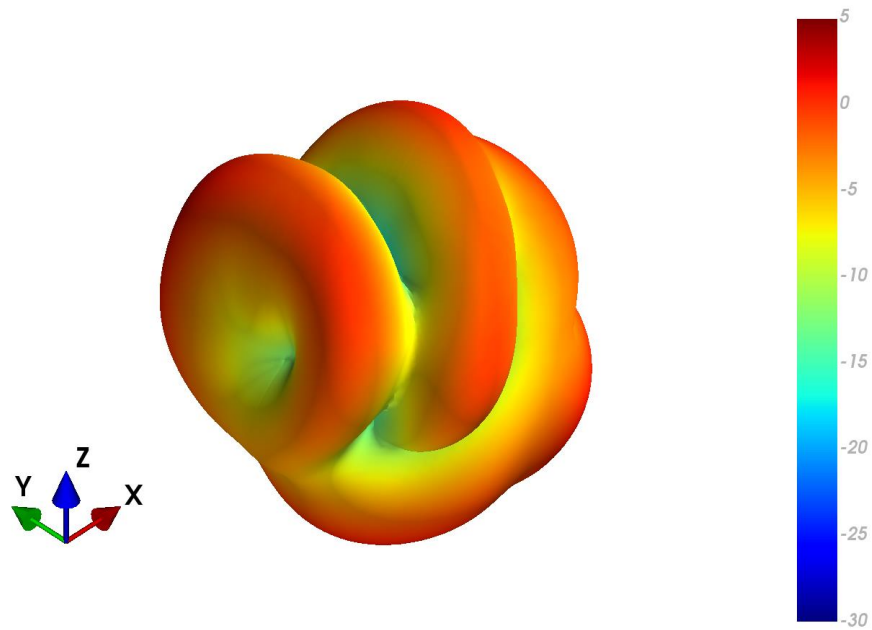


XZ Plane

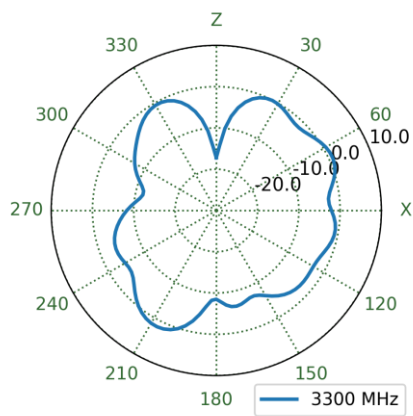


YZ Plane

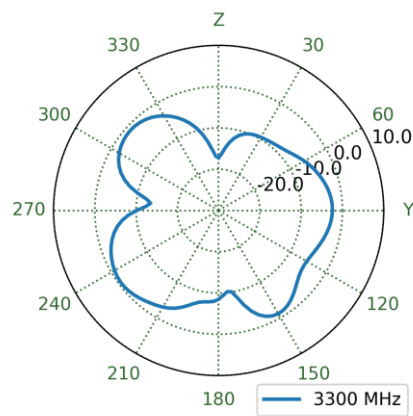


XY Plane

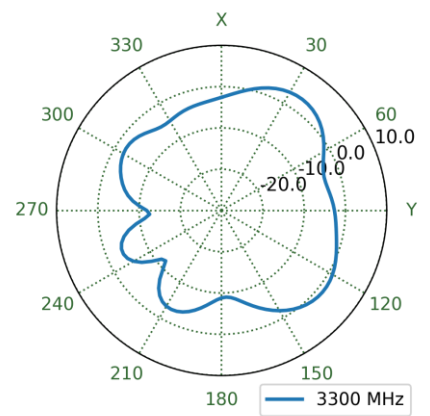


3500MHz

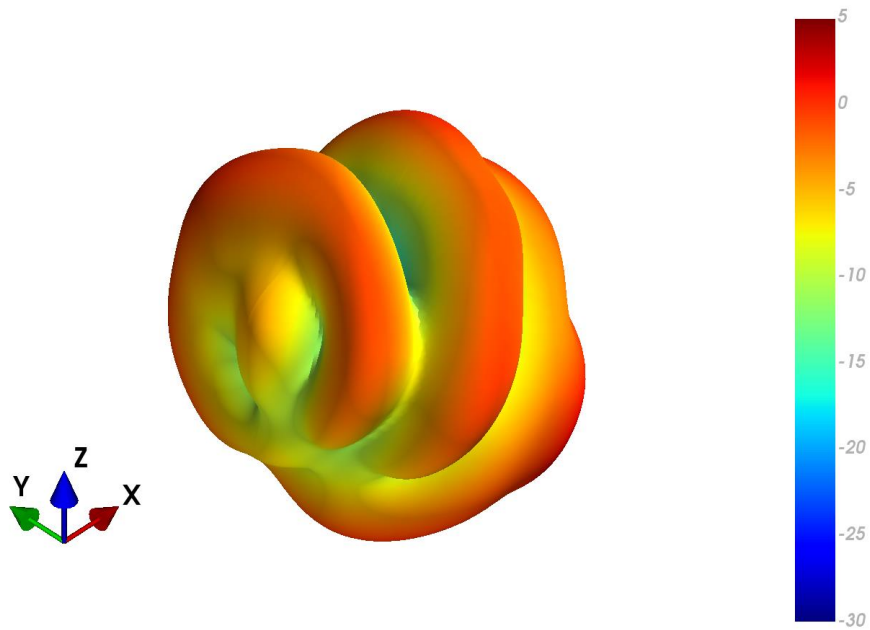


XZ Plane

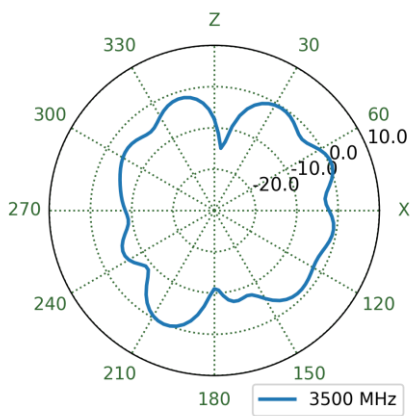



YZ Plane

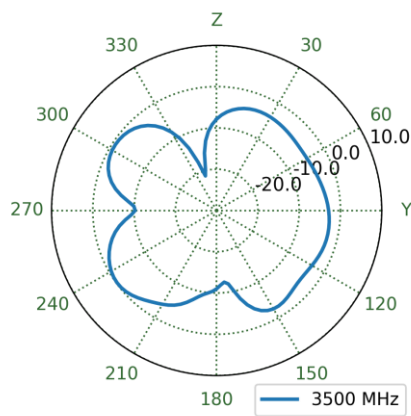

XY Plane

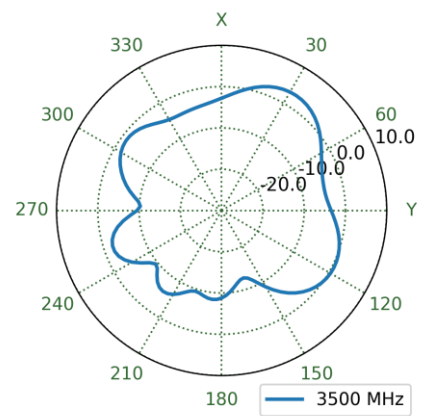




4200MHz

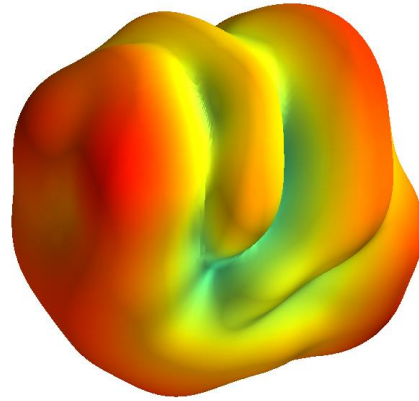



XZ Plane

YZ Plane


XY Plane

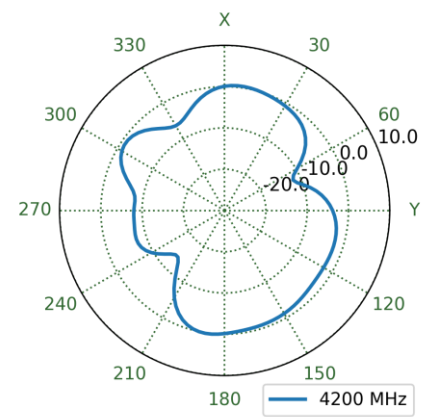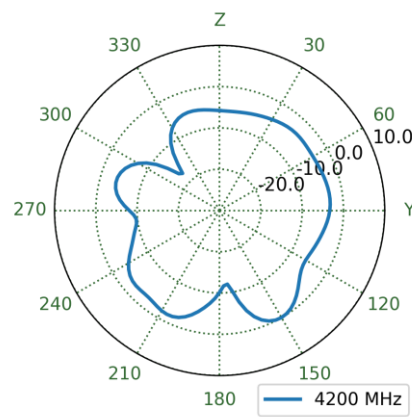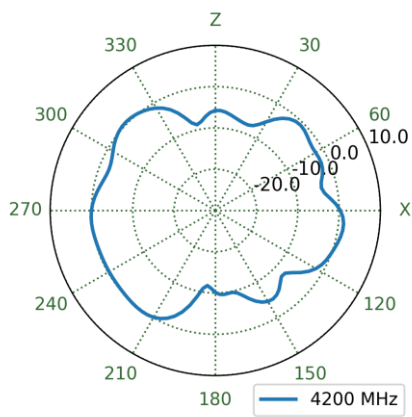


5150MHz

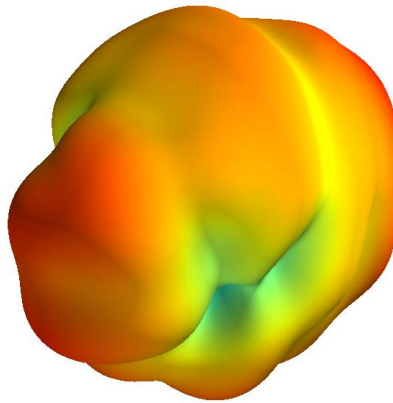


XZ Plane

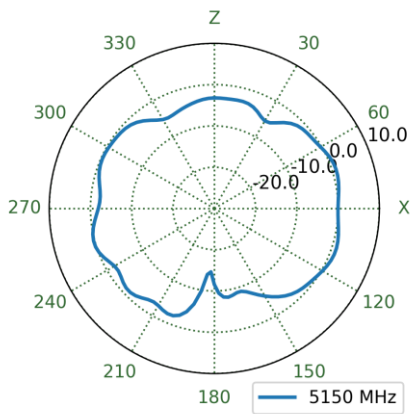


YZ Plane

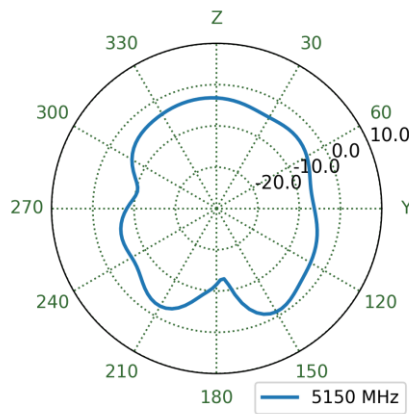

XY Plane

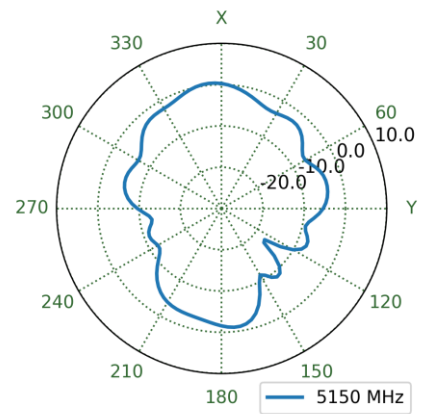




5550MHz

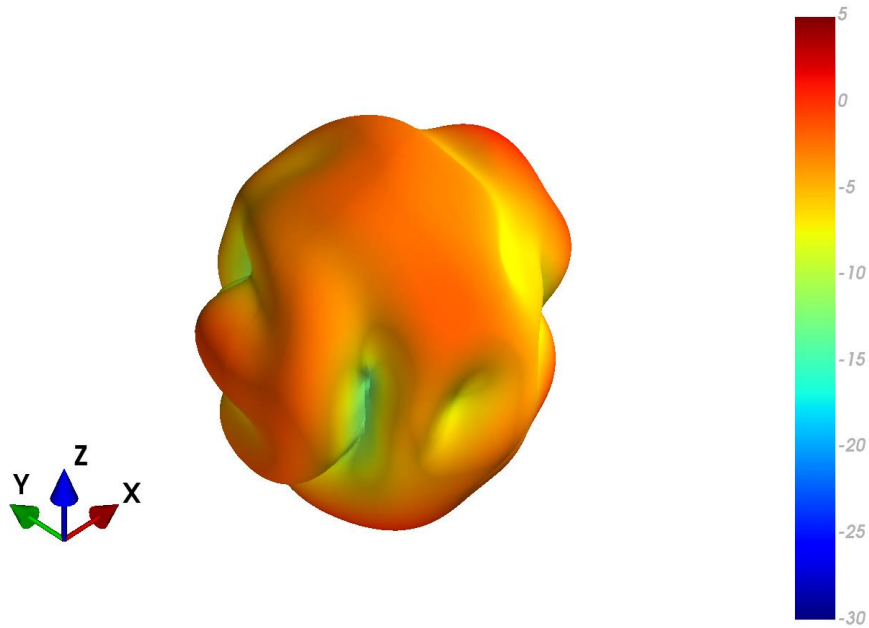



XZ Plane

YZ Plane


XY Plane

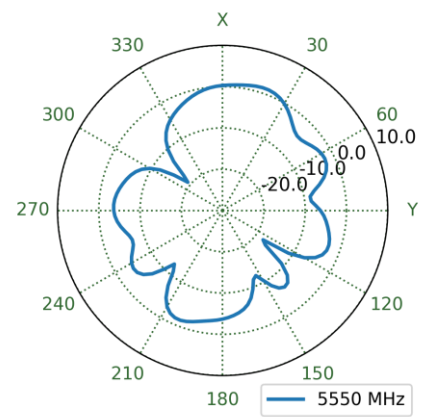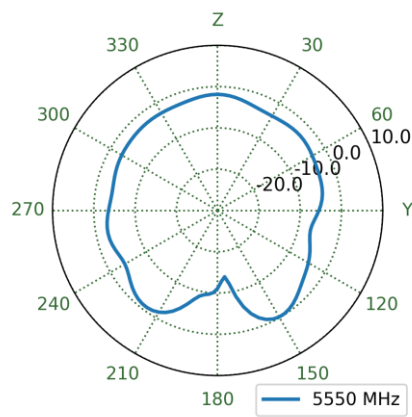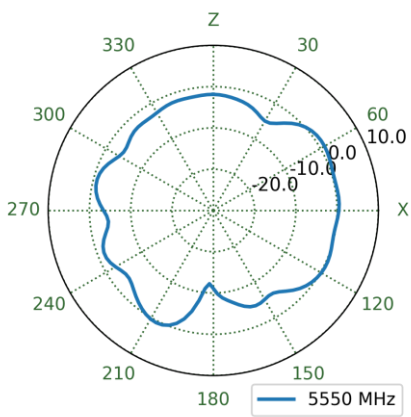


5925MHz

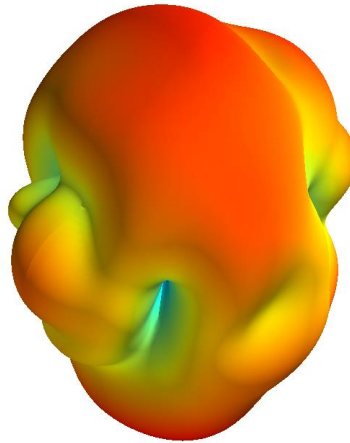


XZ Plane

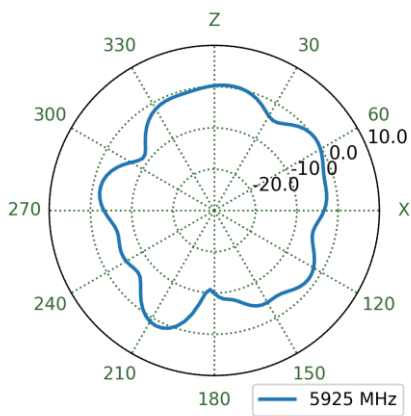


YZ Plane

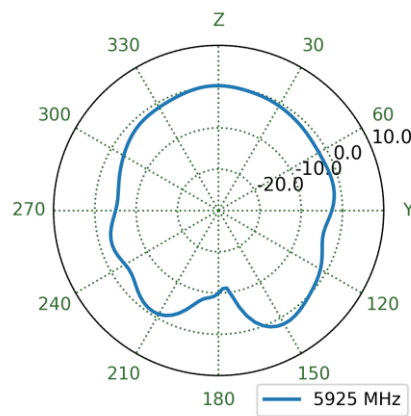

XY Plane

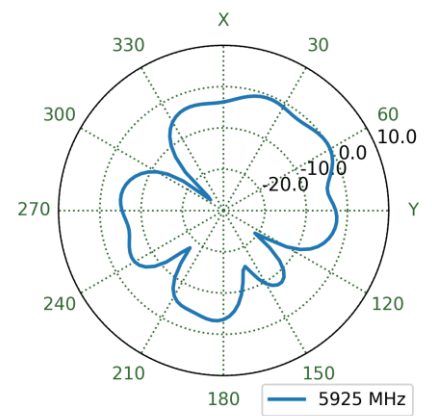

5. Mechanical Drawing (Units: mm)

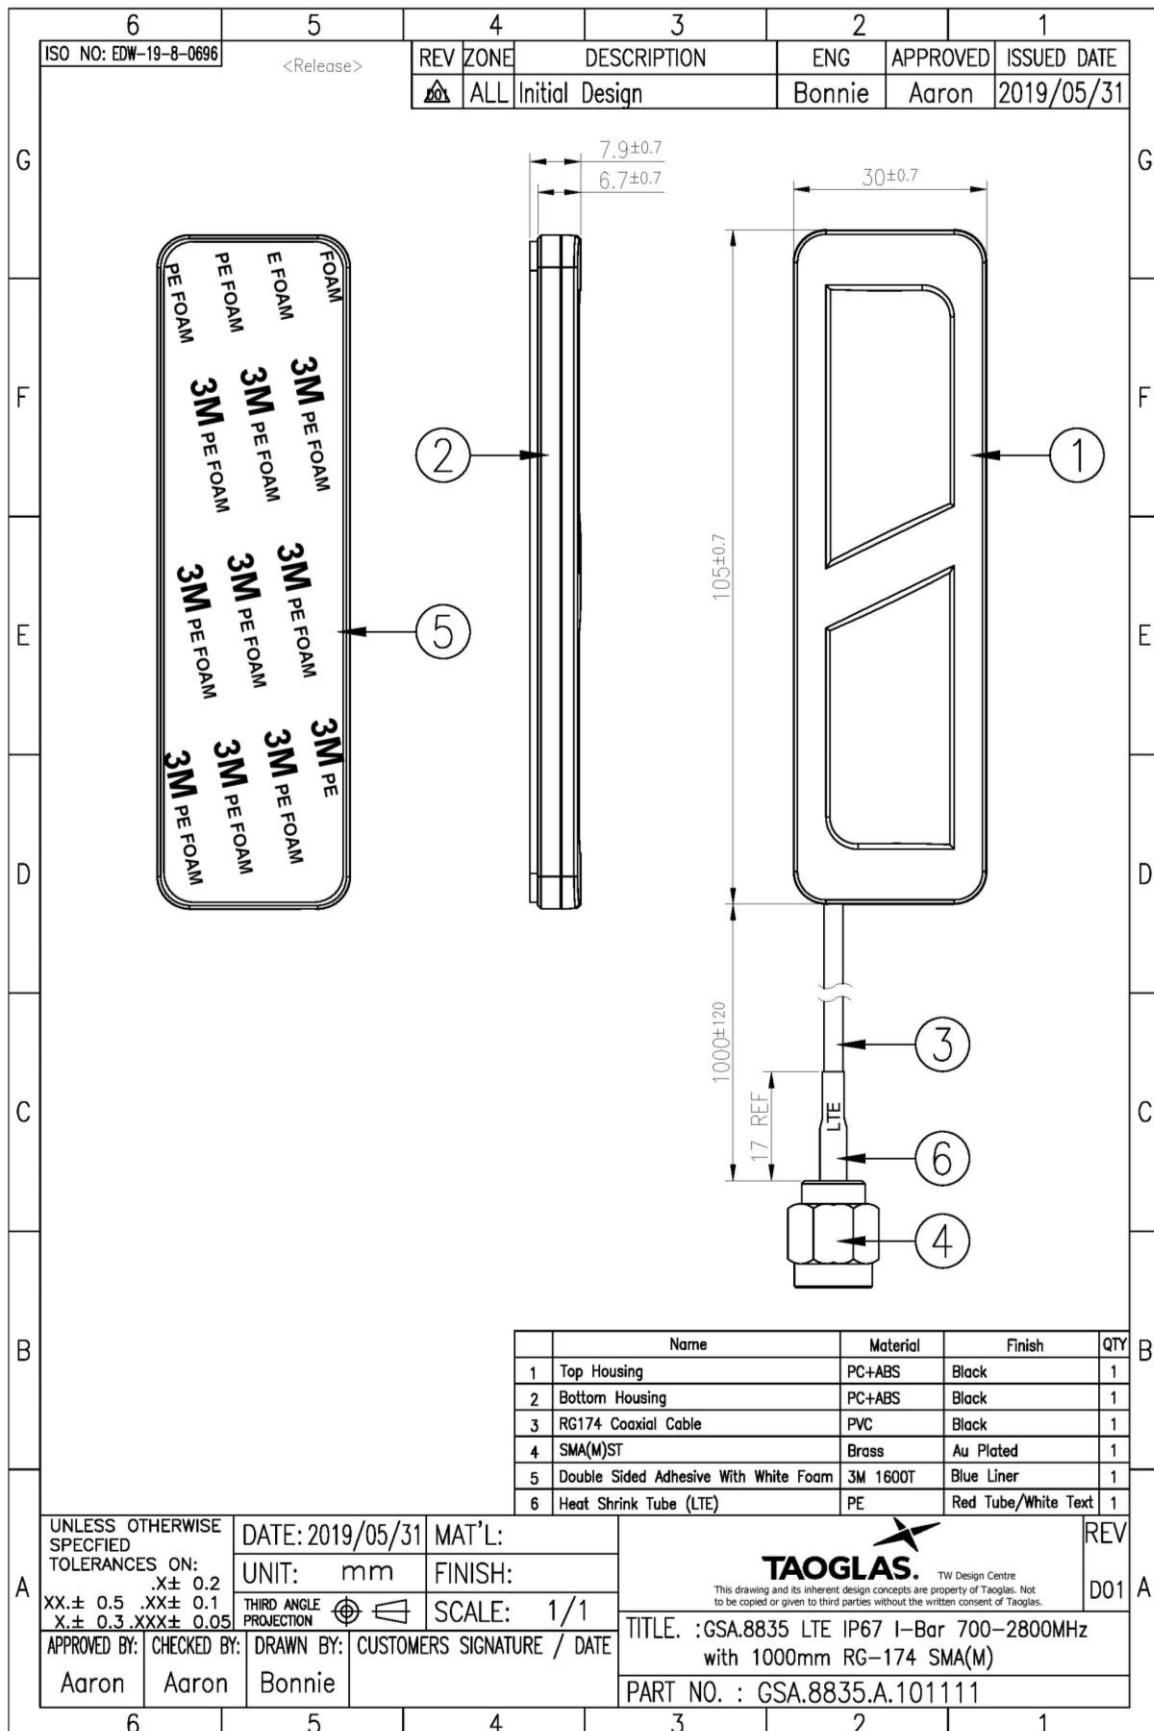


6. Packaging


1pcs GSA.8835.A.101111 per Small PE Bag
 Dimensions - 200*80mm
 Weight - 39g




10pcs GSA.8835.A.101111 per Large PE Bag
 Dimensions - 460*250mm
 Weight - 440g

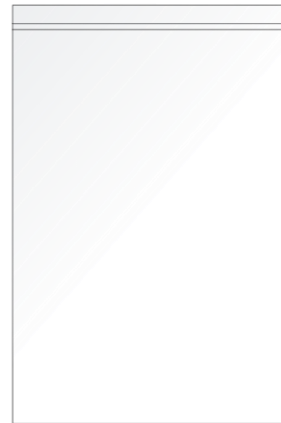

200pcs GSA.8835.A.101111 per carton
 Dimensions - 400*330*230mm
 Weight - 9.75Kg

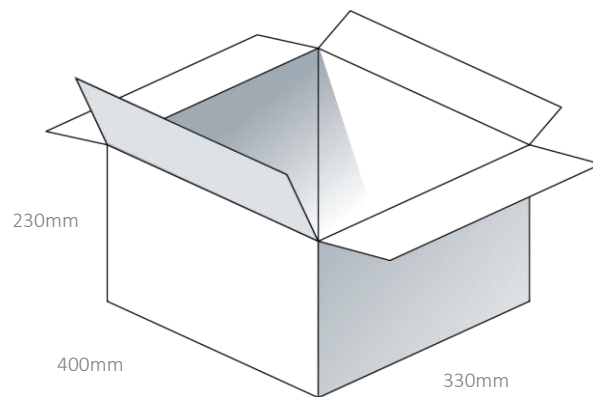

Pallet Dimensions:
 1200*1000*1350mm
 45 Cartons Per Pallet
 9 Cartons Per Layer, 5 Layers

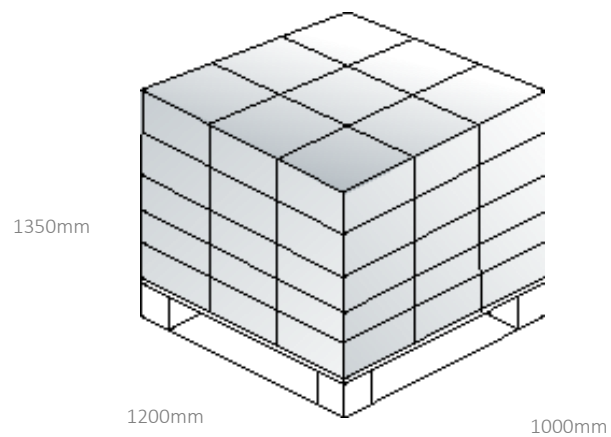

Changelog for the datasheet

SPE-19-8-112 – GSA.8835.A.101111

Revision: C (Current Version)

| | |
|---------|------------------------|
| Date: | 2022-10-27 |
| Notes: | Updated Specifications |
| Author: | Cesar Sousa |

Previous Revisions

Revision: B

| | |
|---------|-------------------------|
| Date: | 2021-03-08 |
| Notes: | Updated Antenna Weight. |
| Author: | Gary West |

Revision: A (Original First Release)

| | |
|---------|-------------|
| Date: | 2019-08-21 |
| Notes: | |
| Author: | Jack Conroy |



TAOGLAS®

www.taoglas.com

