



USB Type C Male

PIN OUT

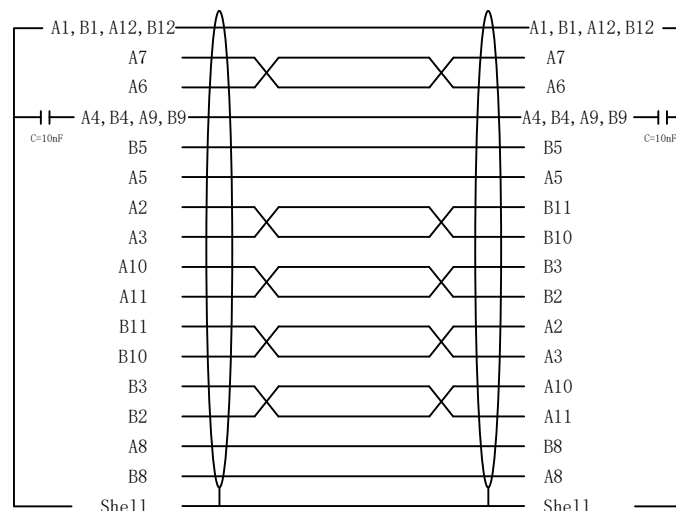

P2

USB Type C Male (90°)

NOTE:

1. Electrical test:

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC300V 10MΩ
- (3). Contactor resistance: 3Ω Max;

2. RoHS 2.0 and REACH Compliant

MATERIAL LIST:

④	Moulding	45P PVC Black	1	
③	Type C	Type C-3.2 Male, The Pin Gold Plating, the shell for Nickel Plating, With E-MARK (20V/5A)	1	
②	Type C	Type C-3.2 90 degree angle male, The Pin Gold Plating, the shell for Nickel Plating	1	
①	CABLE	USB3.2 (1P*32AWG+D+AL+MY)*4C+1P*32AWG+4C*32AWG+2C*23AWG+F+AL+B OD: 4.5±0.2mm, PVC Black	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK

ITEM NO.	Length (mm)
11.02.9075	1000±20

DESC. ROLINE USB3.2 Gen 2x2 (20Gbit/s) Cable C-C, angled 90°, M/M, 1m, black

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
			2021.12.10	A

SECOMP