


## ICL M22 panel mount LED multi strobe beacon

- Ø 65 mm panel-mount LED multi-strobe beacon
- Good signalling effect
- High degree of protection IP 65
- User-friendly connection technology thanks to plug-in screw terminal
- Prewired model versions with IP 67 on request
- Modern LED technology and electronics
- 2 different strobe patterns, can be switched externally
- For industrial and general applications
- Panel size Ø 22.5 mm/M22
- Adapter available for M30.5 mm panel size



### TECHNICAL DATA

|                        |                                                                   |
|------------------------|-------------------------------------------------------------------|
| Housing                | Ø 65 mm, Polycarbonate black (RAL 9005) or grey (RAL 7035)        |
| Lens                   | Polycarbonate, ribbed inside orange or red                        |
| Type of mounting       | any                                                               |
| Panel size             | 22×1,25 mm (M22) and 30.5 mm (with adapter), mounting depth 34 mm |
| Cable entry            | pre-wired at customer's request                                   |
| Connection technology  | Screw/plug-in terminal 2,5 mm <sup>2</sup>                        |
| Leakage current        | 0,003 A (PLC-suitable)                                            |
| Beacon type            | LED multi strobe beacon                                           |
| Light source           | 12 LEDs                                                           |
| Strobe/flash frequency | Double strobe and 6× strobe                                       |
| Duty cycle             | 100 %                                                             |
| Service life           | Light source: 100.000 h                                           |
| Operating temperature  | -25°C/+60°C                                                       |
| Degree of protection   | IP65 & UL Type 4/4X/13                                            |

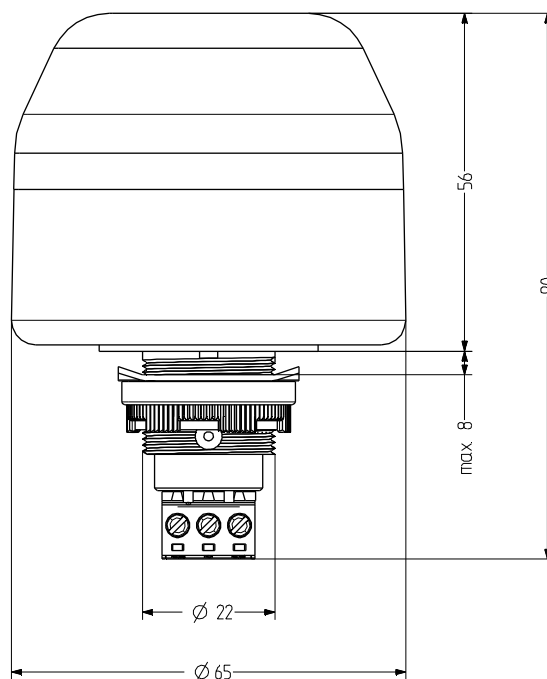

ICL

ORDER DATA

| Lens colour | Nominal voltage | Voltage range (V) | Nominal current (A) | Housing colour |             |
|-------------|-----------------|-------------------|---------------------|----------------|-------------|
|             |                 |                   |                     | grey           | black       |
| orange      | 24 V AC/DC      | +/- 10 %          | 0,155               | 802 121 405    | 802 521 405 |
|             | 110-120 V AC    | +/- 10 %          | 0,045               | 802 121 310    | 802 521 310 |
|             | 230-240 V AC    | +/- 10 %          | 0,045               | 802 121 313    | 802 521 313 |
| red         | 24 V AC/DC      | +/- 10 %          | 0,155               | 802 122 405    | 802 522 405 |
|             | 110-120 V AC    | +/- 10 %          | 0,045               | 802 122 310    | 802 522 310 |
|             | 230-240 V AC    | +/- 10 %          | 0,045               | 802 122 313    | 802 522 313 |



ADM30

ACCESSORIES

| Type  | Type of accessory                   | Weight | Order number |
|-------|-------------------------------------|--------|--------------|
| ADM30 | Adapter for M30.5 for 30.5 mm holes | 8 g    | 812 500 900  |