



## ISS M22 panel mount LED strobe beacon

- Ø 30 mm panel-mount LED strobe beacon
- Good signalling effect
- High degree of protection IP 65
- User-friendly connection technology thanks to plug-in screw terminal
- Modern LED technology and electronics
- For industrial and general applications
- Panel size Ø 22.5 mm/M22
- Adapter available for M30.5 mm panel size



### TECHNICAL DATA

|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| Housing                | Ø 30 mm, Polycarbonate black (RAL 9005) or grey (RAL 7035)    |
| Lens                   | Polycarbonate, ribbed inside orange or red                    |
| Type of mounting       | any                                                           |
| Panel size             | 22x1,5 (M22) and 30.5 mm (with adapter), mounting depth 47 mm |
| Connection technology  | Screw/plug-in terminal 2,5 mm <sup>2</sup>                    |
| Leakage current        | 0,003 A (PLC-suitable)                                        |
| Beacon type            | LED strobe beacon                                             |
| Light source           | 6 LEDs                                                        |
| Strobe/flash frequency | 1 Hz                                                          |
| Duty cycle             | 100 %                                                         |
| Service life           | Light source: 100.000 h                                       |
| Operating temperature  | -25°C/+60°C                                                   |
| Degree of protection   | IP65 & UL Type 4/4x/13                                        |

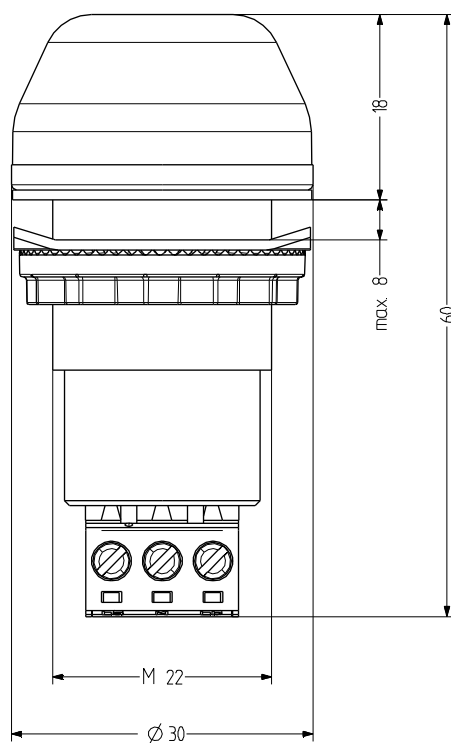

ISS

ORDER DATA

| Lens colour | Nominal voltage | Voltage range (V) | Nominal current (A) | Housing colour |             |
|-------------|-----------------|-------------------|---------------------|----------------|-------------|
|             |                 |                   |                     | black          | grey        |
| orange      | 12 V AC/DC      | +/- 10 %          | 0,060               | 800 511 404    | 800 111 404 |
|             | 24 V AC/DC      | +/- 10 %          | 0,046               | 800 511 405    | 800 111 405 |
|             | 110-120 V AC/DC | +/- 10 %          | 0,018               | 800 511 310    | 800 111 310 |
|             | 230-240 V AC/DC | +/- 10 %          | 0,021               | 800 511 313    | 800 111 313 |
| red         | 12 V AC/DC      | +/- 10 %          | 0,060               | 800 512 404    | 800 112 404 |
|             | 24 V AC/DC      | +/- 10 %          | 0,046               | 800 512 405    | 800 112 405 |
|             | 110-120 V AC/DC | +/- 10 %          | 0,018               | 800 512 310    | 800 112 310 |
|             | 230-240 V AC/DC | +/- 10 %          | 0,021               | 800 512 313    | 800 112 313 |



ADM30



WZ30

ACCESSORIES

| Type  | Type of accessory                   | Weight | Order number |
|-------|-------------------------------------|--------|--------------|
| ADM30 | Adapter for M30.5 for 30.5 mm holes | 8 g    | 812 500 900  |
| WZ30  | Mounting tool for 30 mm models      |        | 812 400 900  |