

**RoHS
Compliant**



Features

1. Display

- Battery level display mode: 10 LED segments, 1red, 2yellow, and 7green.


2. Battery-level testing function

- Automatically identify the current remaining power when connecting with power.
- Battery level delay function: Battery level go down one bar by one bar every 155s and go up one bar by one bar every 200s.
- Five groups of battery voltage ranges can be selected: 12V/24V/36V/48V/72V.

Specification

Product Name	: Battery Indicator with Hour Meter
Display screen	: 10 Segment LED Bar Graph
Working voltage	: 9V DC to 85V DC
Working current	: 12/24V:≤9mA 36V:≤12mA 48/72V:≤20mA
System voltage	: DC 12-24V, 36V, 48V, 72V
Accuracy	: ±0.5%
Pin material	: Copper
Pin type	: +, -, C
Applicable type of battery	: Lead acid storage battery
Screen size	: 25.4mm × 7.7mm
Product dimension	: Φ60mm × 49mm
Housing material	: ABS
Waterproof rate	: IP65
Working temperature	: -20°C to 65°C

Diagram

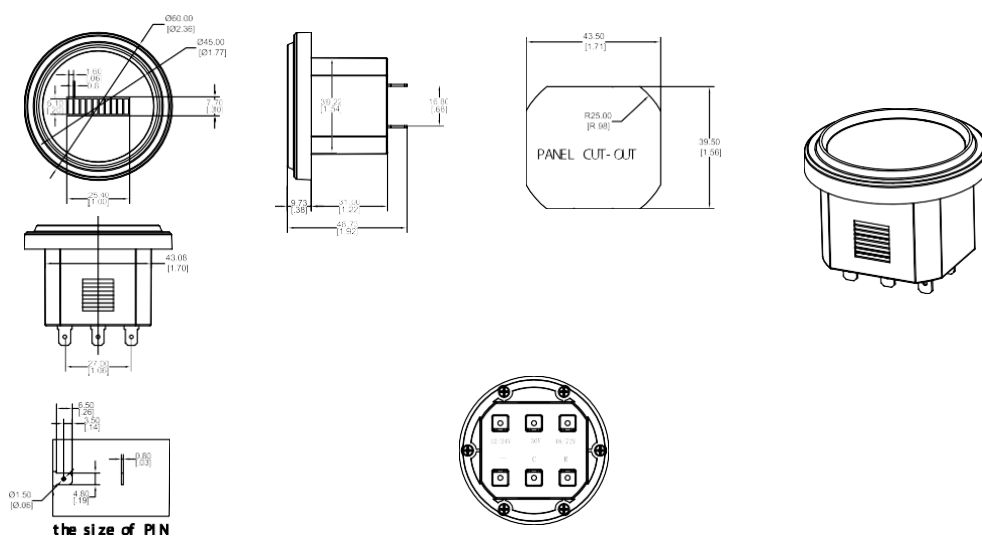

Battery Indicator Multi-Color

multicompPRO

12-24V	Power input positive terminal and connect positive pole of power supply, range DC 9-28V.
36V	Power input positive terminal and connect positive pole of power supply, range DC15-45V
48/72V	Power input positive terminal and connect positive pole of power supply, range DC20-85V
-	Power input negative terminal and connect negative pole of power supply
C	Key switch, connect the positive pole of the battery

Battery type (can Customize)		Battery level									
		1	2	3	4	5	6	7	8	9	10
Lead-acid	12V	10.38	10.59	10.8	11.01	11.22	11.43	11.64	11.85	12.3	>12.3
	24V	20.76	21.18	21.6	22.02	22.44	22.86	23.28	23.7	24.6	>24.6
	36V	31.14	31.77	32.4	33.03	33.66	34.29	34.92	35.55	36.9	>36.9
	48V	41.52	42.36	43.2	44.04	44.88	45.72	46.56	47.4	49.2	>49.2
	72V	62.28	63.54	64.8	66.06	67.32	68.58	69.84	71.1	73.8	>73.8

Part Number Table

Description	Part Number
Battery Indicator Multi-Color, 12-24V/36V/48V/72V, Lead-Acid	MP011719

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO