


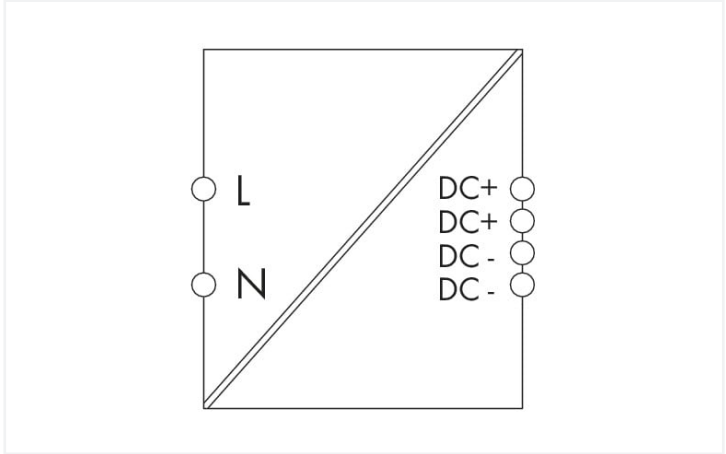

- Features:**
- Switched-mode power supply
 - Natural convection cooling when horizontally mounted
 - Stepped profile, ideal for distribution boards/boxes
 - Overhead mounting is possible with derating
 - Suitable for both parallel and series operation
 - Electrically isolated output voltage (SELV) per EN 61010-2-201/UL 60950-1; PELV per EN 60204

Technical data			
Input		Output	
Phases	1	Nominal output voltage $U_{o\,nom}$	DC 24 V (SELV)
Nominal input voltage $U_{i\,nom}$	1 x AC 100 ... 240 V	Output voltage range	DC 22.8 ... 26.4 V (adjustable)
Input voltage range	1 x AC 85 ... 264 V; DC 120 ... 300 V	Default setting	DC 24 V
Input voltage derating	$I_o \leq 2\text{ A}$ (< 100 VAC); $I_o \leq 1.8\text{ A}$ (< 90 VAC)	Nominal output current $I_{o\,nom}$	2.5 A (24 VDC); 1.6 A (in any mounting position)
Nominal mains frequency range	44 ... 66 Hz; 0 Hz	Nominal output power	60 W
Input current I_i	$\leq 0.6\text{ A}$ (230 VAC); $\leq 1.4\text{ A}$ (110 VAC)	Deviation	$\leq 2\%$
Discharge current	$\leq 1\text{ mA}$	Residual ripple	$\leq 100\text{ mV}$ (peak-to-peak)
Inrush current	$\leq 30\text{ A}$ (NTC)	Current limitation	$1.1 \times I_{o\,nom}$ (typ.)
Power factor correction (PFC)	passive	Overload behavior	Constant current
Mains failure hold-up time	$\geq 80\text{ ms}$ (230 VAC); $\geq 10\text{ ms}$ (110 VAC)		

Signaling and communication		Efficiency/power losses	
Signaling	1 x Status indication LED (green)	Power loss P_I	$\leq 2.2\text{ W}$; $\leq 8.5\text{ W}$ (230 VAC; nominal load)
Operation status indicator	Green LED (U_o)	Power loss (max.) $P_{I(max)}$	10.5 W (100 VAC / 24 VDC; 2.5 A)
		Efficiency (typ.)	88 %

Circuit protection	
Internal fuse	T 2 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 6 A (C characteristic), 10 A (B characteristic) or higher



Safety and protection		
Isolation voltage (pri.-sec.)		DC 4.242 kV
Protection class		II
Protection type		IP20; per EN 60529
Resistance to reverse feed		≤ DC 30 V
Overvoltage category		II
Pollution degree		2
Transient suppression (primary)		Varistor
Overvoltage protection; secondary		≤ 40 VDC (in the event of a fault)
Short-circuit-protected		Yes
Open-circuit-proof		Yes
Parallel operation		Yes
Series operation		Yes
MTBF		> 500,000 h (per IEC 61709)

Connection data		
Connection type 1		Input/output
Connection technology		CAGE CLAMP®
WAGO connector		WAGO 740 Series
Solid conductor		0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor		0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length		6 ... 7 mm / 0.24 ... 0.28 inches

Physical data		
Width		72 mm / 2.835 inches
Height		89 mm / 3.504 inches
Depth		59 mm / 2.323 inches
Depth from upper-edge of DIN-rail		55 mm / 2.165 inches

Mechanical data		
Mounting type		DIN-35 rail

Material data		
Flammability class per UL94		V0
Fire load		0 MJ
Weight		255 g

Environmental requirements		
Ambient temperature (operation)		-25 ... +60 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)		-25 ... +80 °C
Ambient temperature UL (operation at U _N)		-25 ... +55 °C
Relative humidity		5 ... 96 % (no condensation permissible)
Derating		-3 %/K (> 45 °C)



Standards and specifications	
Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 60950-1 UL 508 DNV

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4050821297598
Customs tariff number	85044083900

Approvals / Certificates					
General approvals			Approvals for marine applications		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011,TP TC 020/2011	EAC RU C-DE.AM02. B.00089_19	DNV DNV Germany GmbH	DNV-CG-0339,Aug.2021	TAA00000KT
UL Underwriters Laboratories Inc.	UL 60950-1	E255815			
UL Underwriters Laboratories Inc.	UL 508	E255817			

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 787-1012	

Documentation



Bid Text			
787-1012	24.06.2019	xml 6.98 KB	↓
787-1012	12.06.2019	docx 20.75 KB	↓

Instruction Leaflet			
Power Supply COM-PACT	29-03-2021 20.12.2021	pdf 2143.15 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 787-1012 ↓	EPLAN Data Portal 787-1012 ↓
	WSCAD Universe 787-1012 ↓
	ZUKEN Portal 787-1012 ↓

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marking strip



Item No.: 210-831 Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white	Item No.: 210-832 Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white
--	--

1.1.2 Tool		
1.1.2.1 Operating tool		
		
<u>Item No.: 210-720</u> Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured	<u>Item No.: 210-769</u> SCREWDRIVER; green	