


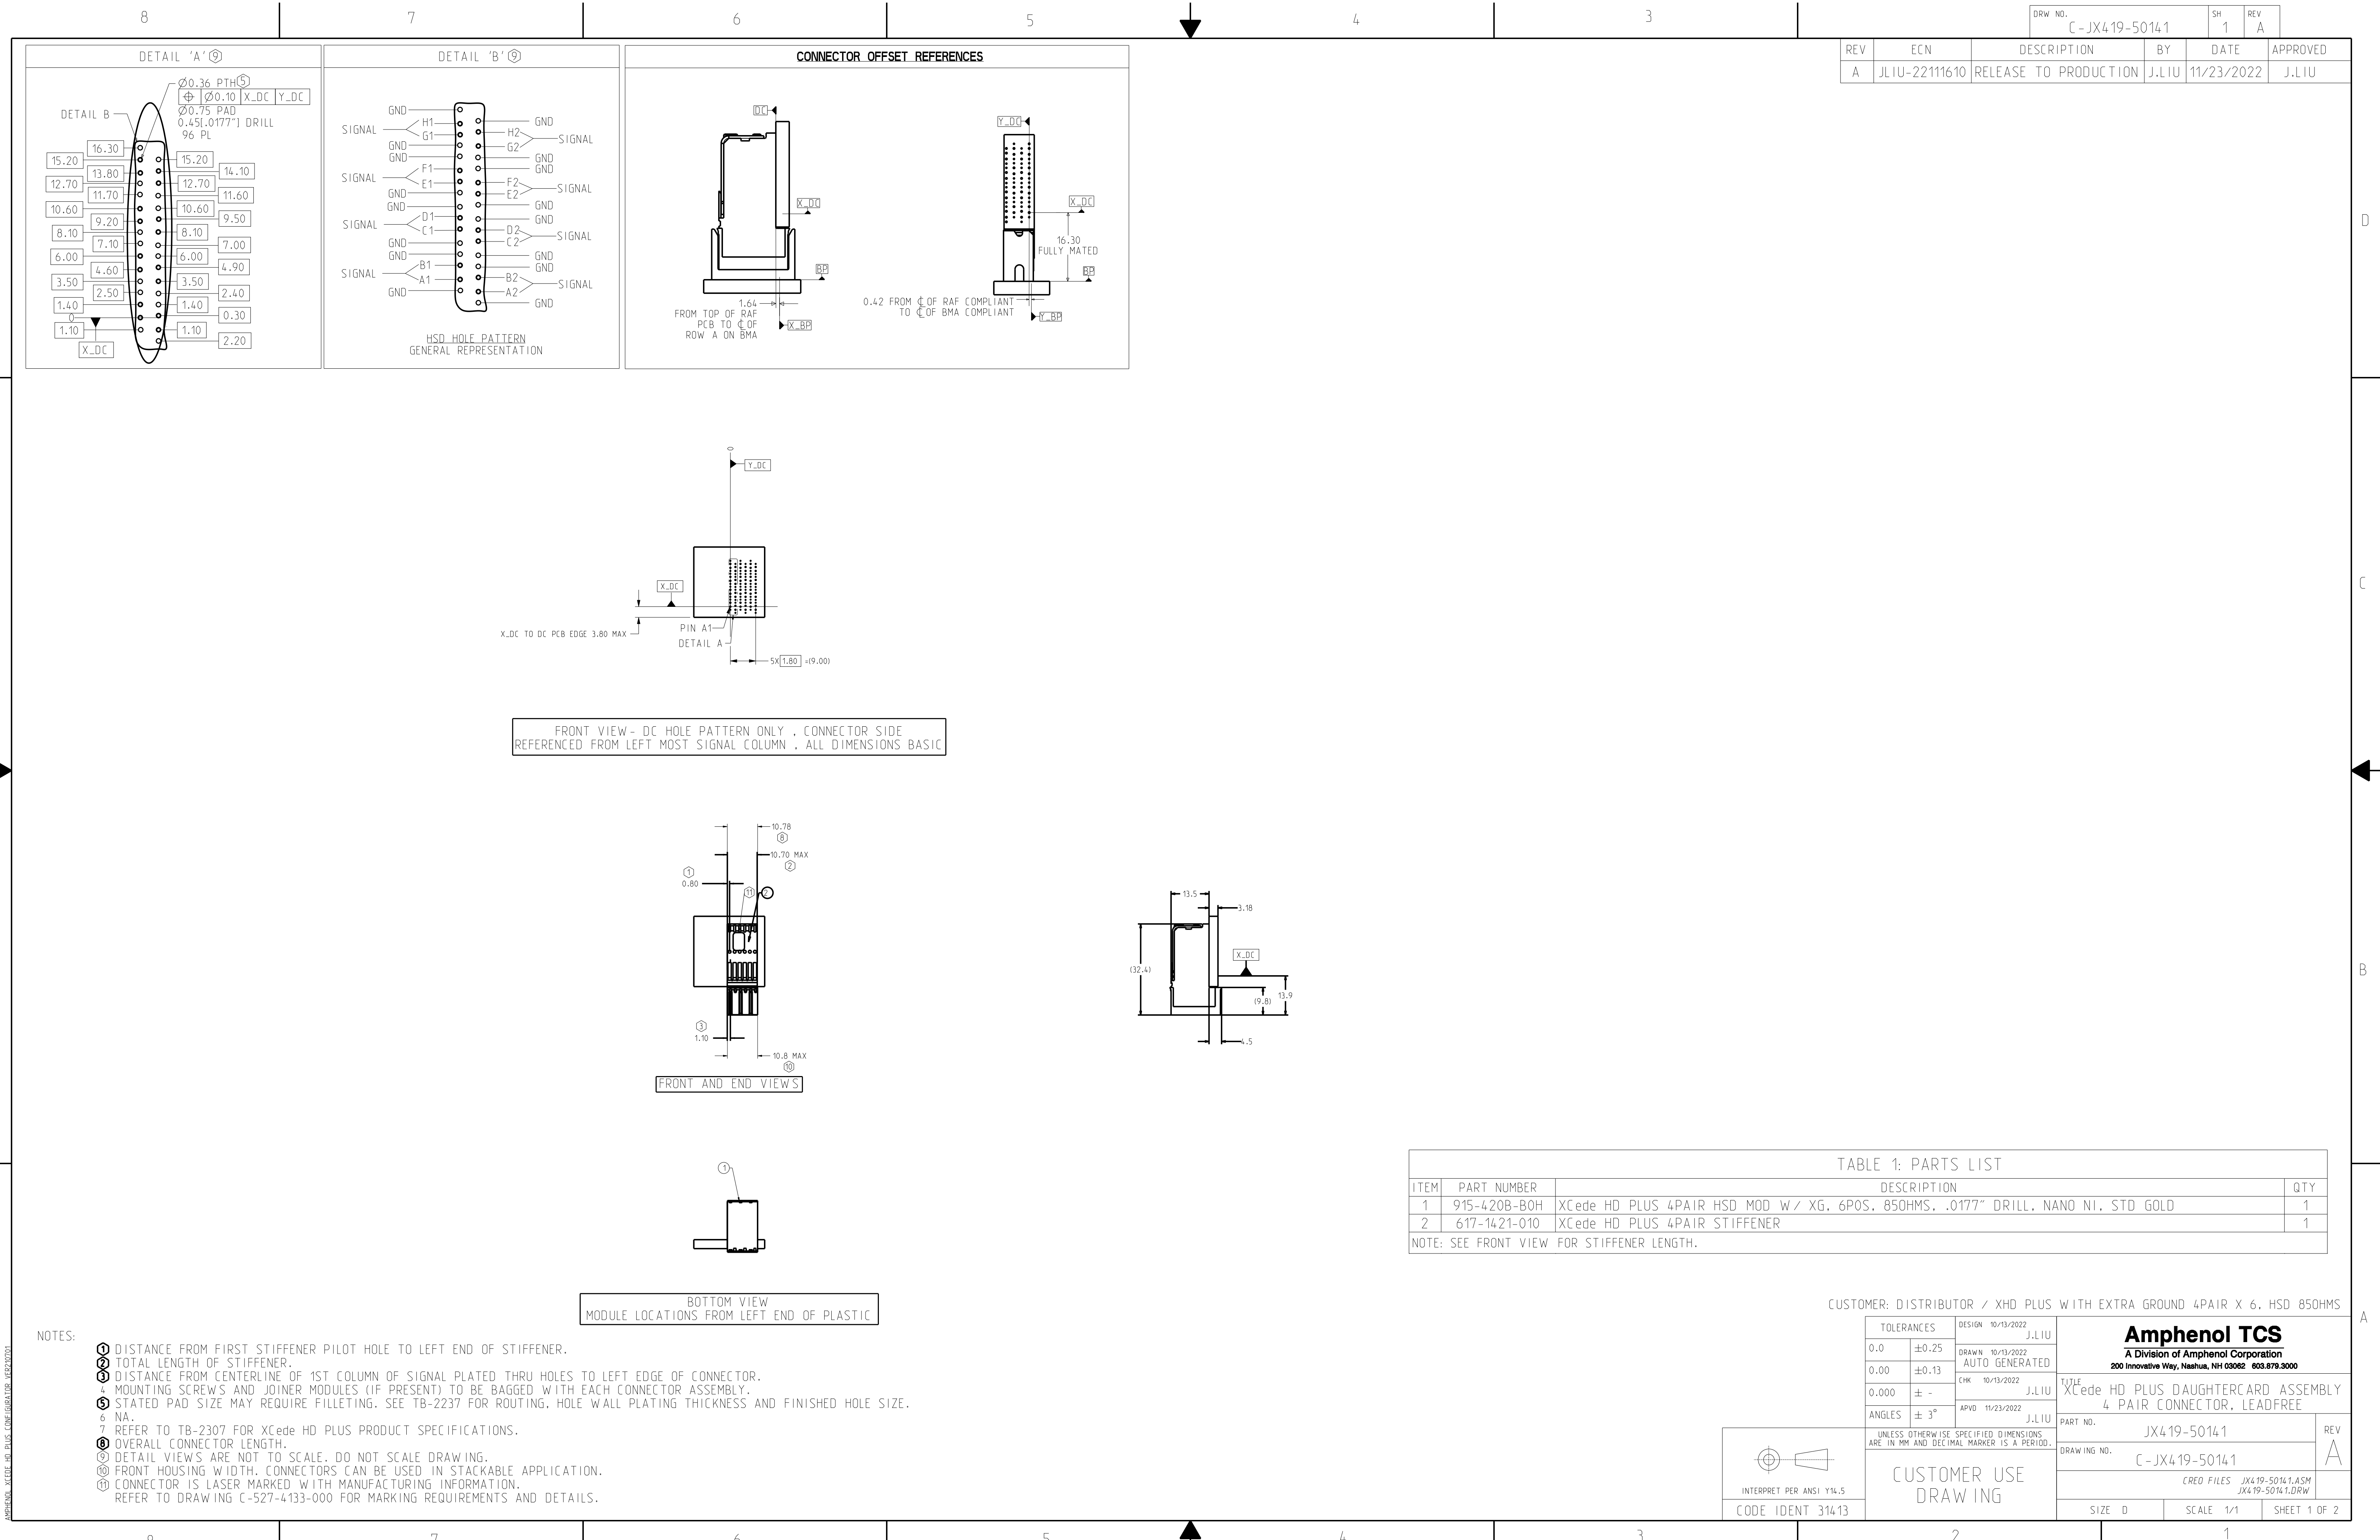

AMPHENOL XCETE HD PLUS CONNECTOR VER202001

NOTES:


- ① DISTANCE FROM FIRST STIFFENER PILOT HOLE TO LEFT END OF STIFFENER.
- ② TOTAL LENGTH OF STIFFENER.
- ③ DISTANCE FROM CENTERLINE OF 1ST COLUMN OF SIGNAL PLATED THRU HOLES TO LEFT EDGE OF CONNECTOR.
- ④ MOUNTING SCREWS AND JOINER MODULES (IF PRESENT) TO BE BAGGED WITH EACH CONNECTOR ASSEMBLY.
- ⑤ STATED PAD SIZE MAY REQUIRE FILLETING. SEE TB-2237 FOR ROUTING, HOLE WALL PLATING THICKNESS AND FINISHED HOLE SIZE.
- ⑥ NA.
- ⑦ REFER TO TB-2307 FOR XCede HD PLUS PRODUCT SPECIFICATIONS.
- ⑧ OVERALL CONNECTOR LENGTH.
- ⑨ DETAIL VIEWS ARE NOT TO SCALE. DO NOT SCALE DRAWING.
- ⑩ FRONT HOUSING WIDTH. CONNECTORS CAN BE USED IN STACKABLE APPLICATION.
- ⑪ CONNECTOR IS LASER MARKED WITH MANUFACTURING INFORMATION. REFER TO DRAWING C-527-4133-000 FOR MARKING REQUIREMENTS AND DETAILS.

TABLE 1: PARTS LIST			
ITEM	PART NUMBER	DESCRIPTION	QTY
1	915-420B-BOH	XCede HD PLUS 4PAIR HSD MOD w / XG, 6POS, 850HMS, .0177" DRILL, NANO NI, STD GOLD	1
2	617-1421-010	XCede HD PLUS 4PAIR STIFFENER	1

NOTE: SEE FRONT VIEW FOR STIFFENER LENGTH.

CUSTOMER: DISTRIBUTOR / XHD PLUS WITH EXTRA GROUND 4PAIR X 6. HSD 850HMS

TOLERANCES		DESIGN	10/13/2022	Amphenol TCS A Division of Amphenol Corporation 200 Innovative Way, Nashua, NH 03062 603.879.3000	
0.0	±0.25	DRAWN	10/13/2022		
0.00	±0.13	CHK	10/13/2022		
0.000	± -	J.LIU			
ANGLES	± 3°	APVD	11/23/2022	J.LIU	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM AND DECIMAL MARKER IS A PERIOD.					
CUSTOMER USE DRAWING					REV A
					PART NO. JX419-50141
					DRAWING NO. C-JX419-50141
SIZE D		SCALE 1/1		SHEET 1 OF 2	

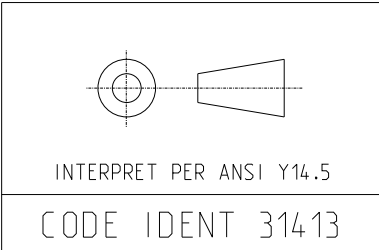

INTERPRET PER ANSI Y14.5

CODE IDENT 31413

CRED FILES JX419-50141.ASM
JX419-50141.DRW

