


Test:

- 1.100% Open Short Miss Test;
2. Conduct Resistance: 2Ω MAX.;
3. Insulation Resistance: $10M\Omega$ MIN DC 300V/10ms;

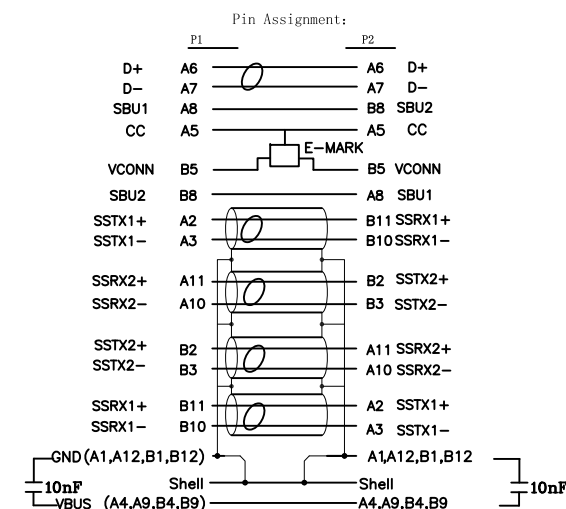

10	TPE~35P~Black	8.4	G
9	USB4 CM Shell (HN-ZS-0878) ~PC+ABS 3100~1*4~Black	2	PCS
8	Low pressure Inner-mplding~Transparent	6	G
7	USB4 TYPE-C~COAX~Shell 2 (HN-CY-0263) ~SUS304 H, T=0.15±0.01mm	2	PCS
6	USB4 TYPE-C~COAX~Shell 1 (HN-CY-0263) ~SUS304 H, T=0.15±0.01mm	2	PCS
5	TYPE-C~Clip (HN-ZS-1064) ~Black~PA66+15%GF	2	PCS
4	USB 3.1 C Type Connector~PCB+IC VL153~Nickel Plated	1	PCS
3	USB 3.1 C Type Connector~PCB~Nickel Plated	1	PCS
2	W=3mm 25u Copper Coil	0.07	M
1	USB4~[30AWG (7/0.104SC)+EAM]*4P+[34AWG (7/0.06TC)+AM]*1P+34AWG (19/0.04TC)*4C+24AWG (41/0.08TC)*1C+EAS~OD:5.1MM~TPE~Black	0.5	M
NO	ITEM	DESCRIPTION	Q'TY UNIT

		INCHES		M/M				
.X		.015	.30					
.XX		.010	.10					
.XXX		.005	.05					
TITLE: USB4 Type-C To Type-C Cable Assembly Gen3 5A 240W(EPR) With E-Mark(Twisted Pair Cable)								
DRAWN BY					CUSTOMER P/N :			
CHECK BY					SCALE	NONE	DRAWING NO.:	REV. A0
APPD BY					UNIT	MM		1/1
					DATE	2023.03.30		