


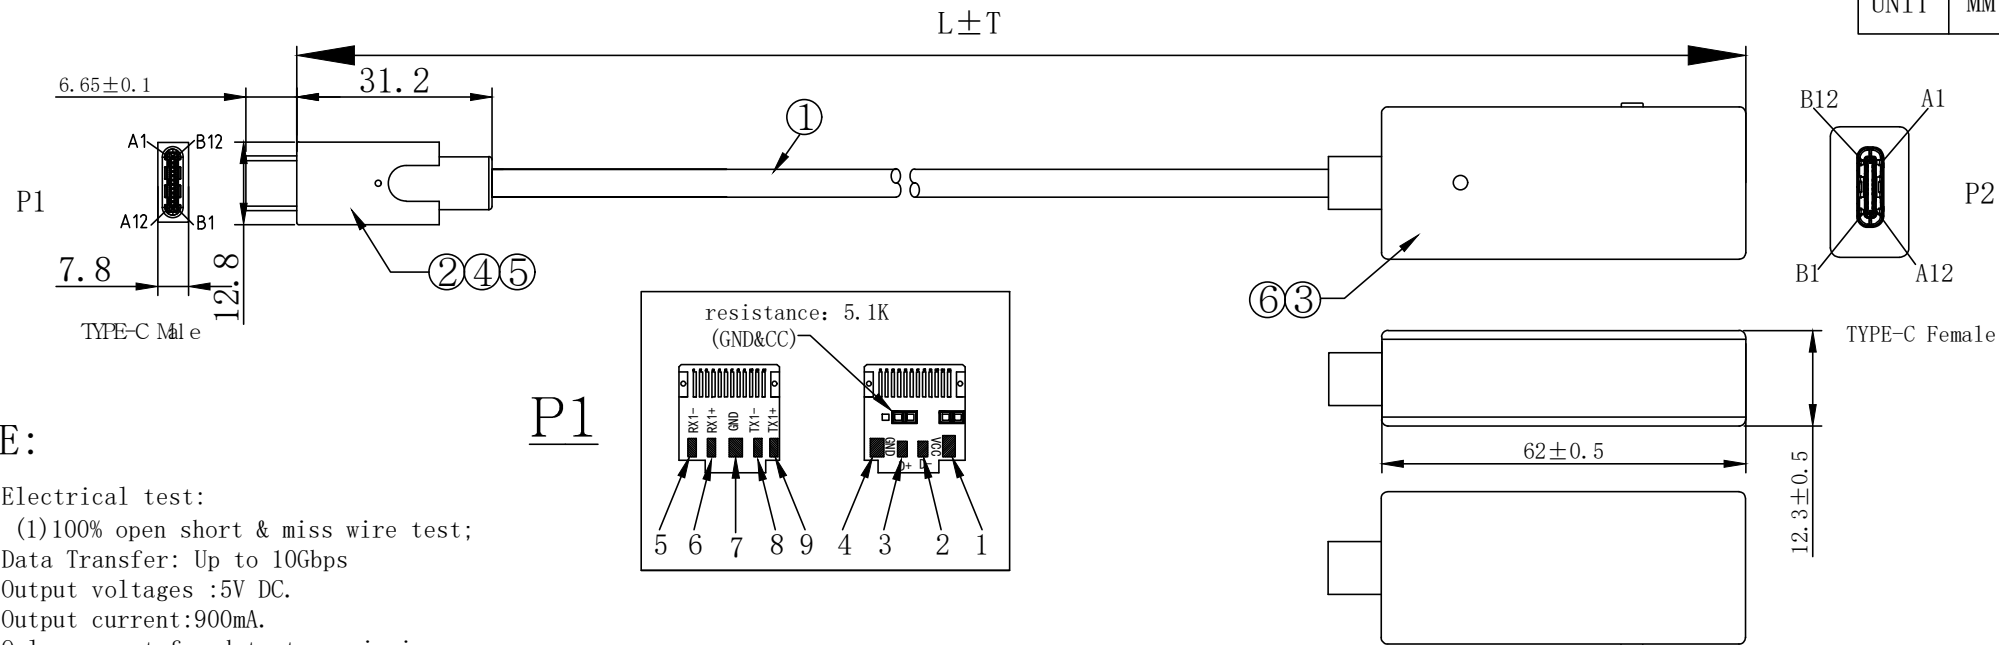


NOTE:

- Electrical test:
(1)100% open short & miss wire test;
- Data Transfer: Up to 10Gbps
- Output voltages :5V DC.
- Output current:900mA.
- Only support for data transmission
- Storage temperature : -20℃~+60℃
- Operation temperature: 0℃~+50℃
- RoHS 2.0 and REACH Compliant

MATERIAL LIST:

⑥	OUTER MOLD	PVC color For BLACK	2	
⑤	HOUSING	ABS Housing Black	1	
④	PCB	USB Signal amplifier IC with DC power input	1	
③	USB TYPE C	USB Type C /F Solder Type,Blue PBT Insulation,The Pin Gold Plating, the shell for Nickel Plating with PCB	1	
②	USB TYPE C	USB Type C /M Solder Type,Black PBT Insulation,The Pin Gold Plating, the shell for Nickel Plating	1	
①	CABLE	USB 3.2(28AWG BC*1P+E+AL+Mylar)*2+(25AWG BC*1P)+(22AWG BC*2C)+AEB AL-MG Jacket PVC Black OD:7.0±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		NEW	2022-09-29	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

P2

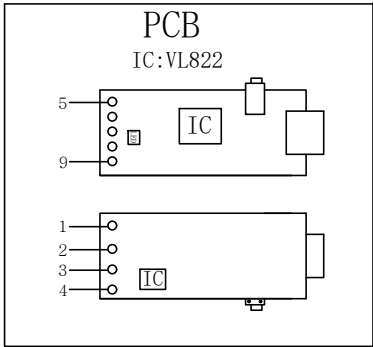

12.04.1105	ROLINE USB3.2 Gen2 Type C, Extension Cable, M/F, 5m // Only Data
ITEM NO.	DESC.

SECOMP