

Molded SMD Power Inductor (AEC-Q200 Grade 0)

ASPIAIG-F6060

Request Samples



Check Inventory



6.6 x 6.4 x 5.8 mm
RoHS/RoHS II Compliant
MSL Level = 1

Features

- PPAP ready and supported
- TS16949 certified production lines
- AEC-Q200 qualified (-55°C ~ +155°C)
- Shielded construction
- Soft saturation
- Low DCR, High Efficiency

Applications

- Body electronics and comfort system
- Infotainment and entertainment
- Electric vehicles
- Lighting
- Solar inverters and power
- Industrial and robotics
- Medium and high-power switch mode power supplies.

Electrical Specifications

Part Number	Inductance	Tolerance	DC Resistance		Saturation Current	Temperature Rise Current
	0.1MHz/1.0V		Max	Typ.	Max	Typ.
Units	μH	%	mΩ		A	A
Symbol	L	M	DCR		Isat	Irms
ASPIAIG-F6060-4R7M-T	4.70	20	14.4	13.10	9.5	11.0
ASPIAIG-F6060-5R6M-T	5.60	20	15.8	14.30	9.0	10.0
ASPIAIG-F6060-6R8M-T	6.80	20	20.8	18.90	8.7	9.0
ASPIAIG-F6060-8R2M-T	8.20	20	24.8	22.50	8.0	8.0
ASPIAIG-F6060-100M-T	10.0	20	29.3	26.60	6.8	7.0

Test Conditions

Isat: DC current at which the inductance drops 30% from its value without current.

Irms: DC current that causes the temperature rise (ΔT , approximate 40 °C) from 25°C ambient.


Operating Temperature: -55°C ~ +155°C (including self-temperature rise)

Storage Condition: -55°C ~ +155°C (on board), -10°C ~ +40°C (with packaging) and R.H. 60 max

ASPIAIG-F6060 Series is RoHS Compliant and Pb free

ASPIAIG-F6060 is AEC-Q200 Grade 0 qualified (-55°C ~ +155°C)

Part Identification

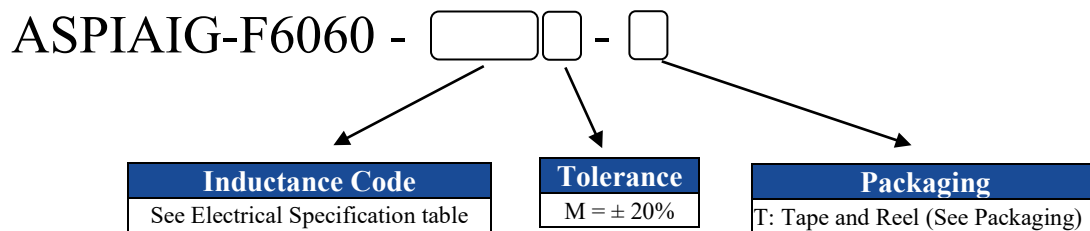

Molded SMD Power Inductor (AEC-Q200 Grade 0)

ASPIAIG-F6060

Request Samples




Check Inventory




6.6 x 6.4 x 5.8 mm
RoHS/RoHS II Compliant
MSL Level = 1

Marking

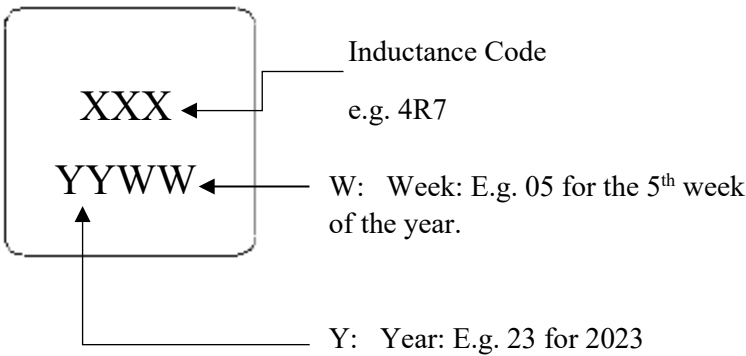

Marking Method = Ink Marking

Mechanical Specifications

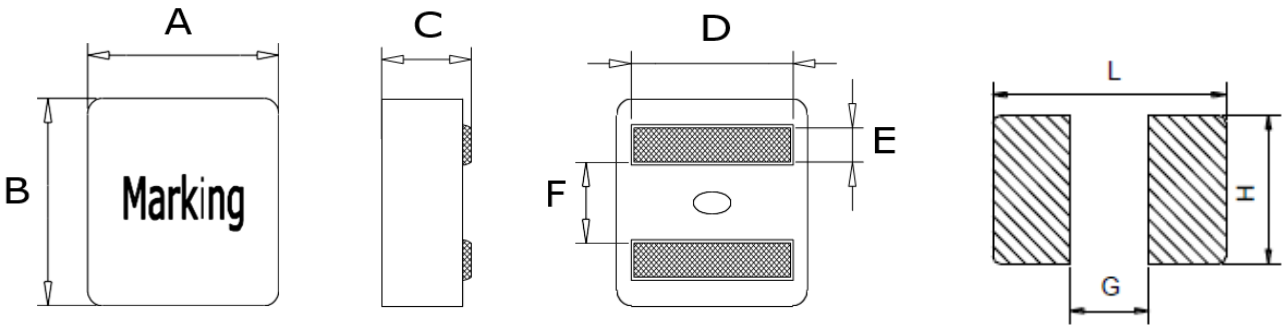

Series	A	B	C	D	E	F	L	G	H
ASPIAIG-F6060	6.6 ± 0.2	6.4 ± 0.2	5.8 ± 0.2	5.3 ± 0.3	1.40 ± 0.2	2.6 ± 0.25	5.6 Ref.	2.5 Ref.	5.6 Ref.

Dimensions: mm

Molded SMD Power Inductor (AEC-Q200 Grade 0)

ASPIAIG-F6060

Request Samples




Check Inventory



6.6 x 6.4 x 5.8 mm
RoHS/RoHS II Compliant
MSL Level = 1

Reflow Profile

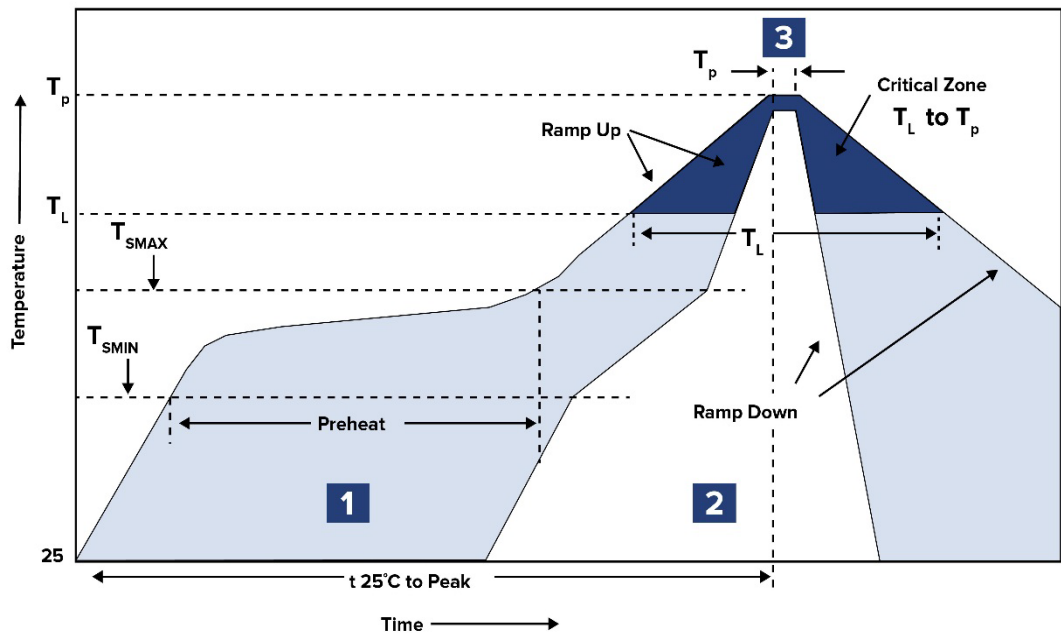

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 200°C	60 ~ 180 sec.
2	Reflow	T_L 217°C	60 ~ 150 sec.
3	Peak heat	T_P 260°C	10 sec. MAX

Molded SMD Power Inductor (AEC-Q200 Grade 0)

ASPIAIG-F6060

Request Samples




Check Inventory




6.6 x 6.4 x 5.8 mm
RoHS/RoHS II Compliant
MSL Level = 1

Packaging

Tape & Reel: 750 pcs/reel

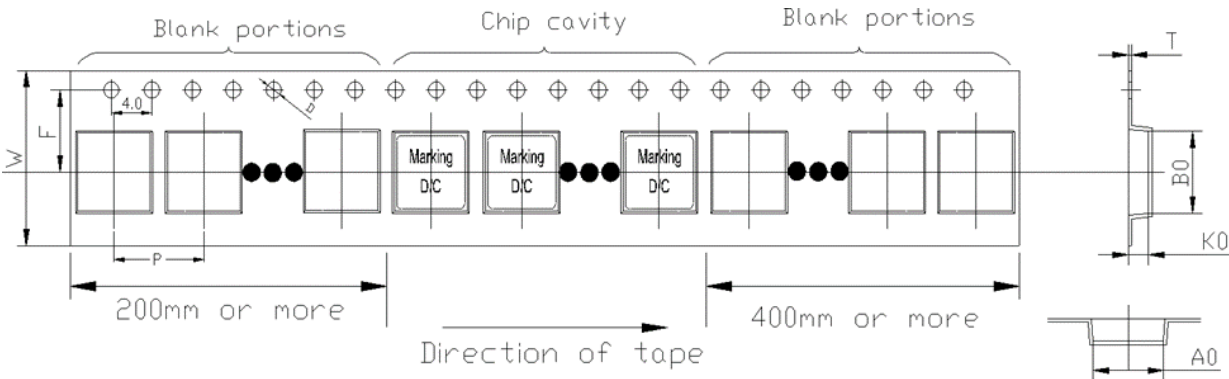

A0	B0	K0	P	W	F	T	D
7.0±0.1	6.80±0.1	6.30±0.1	12.00±0.1	16.00±0.3	7.50±0.1	0.35±0.1	1.50±0.1

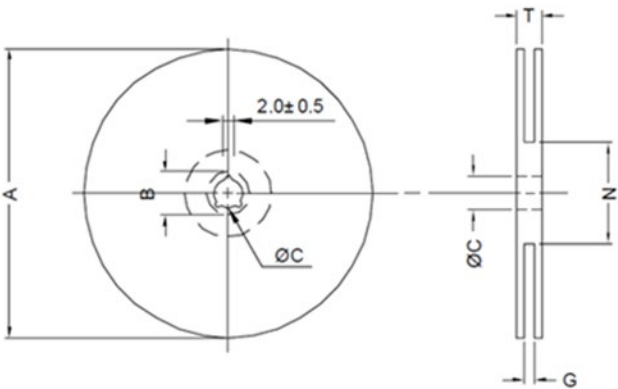

A	C	G	N
330.0 ± 2.0	13.0±0.5	16.4±1.0	100.0 ± 2.0

Dimensions: mm

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION: IR 05-01-23

ABRACON IS
ISO9001-2015
CERTIFIED