


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/14/10	D.GRIFFIN
B	ECN 5868: ADDED LENGTHS 03 M, 075 M, AND 4.0 M	12/5/11	D.FRISIELLO
C	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/18/12	DFP

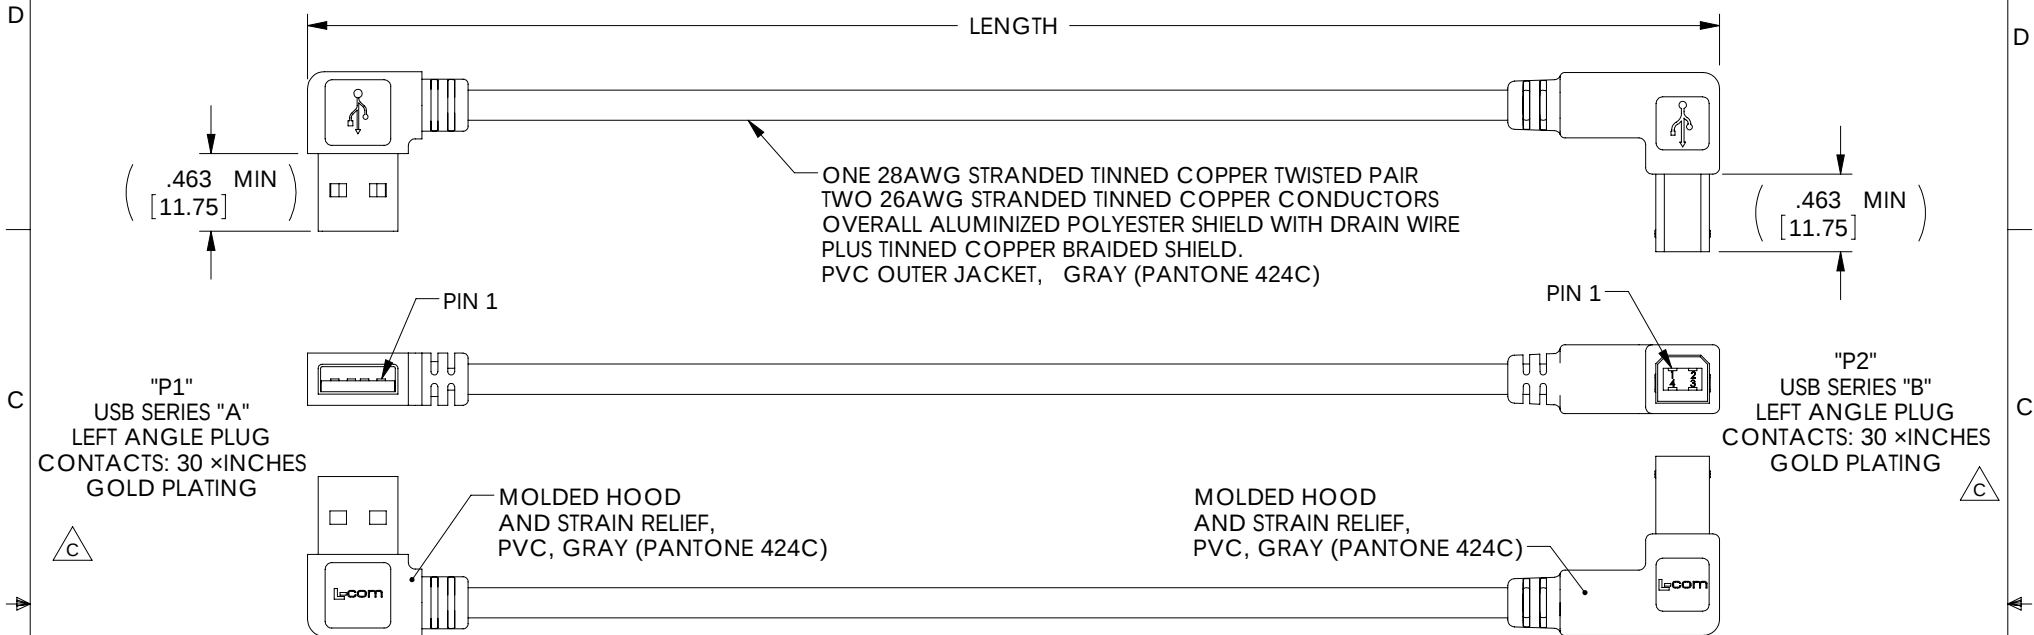

"P1"
USB SERIES "A"
LEFT ANGLE PLUG
CONTACTS: 30 x INCHES
GOLD PLATING


MOLDED HOOD
AND STRAIN RELIEF,
PVC, GRAY (PANTONE 424C)

MOLDED HOOD
AND STRAIN RELIEF,
PVC, GRAY (PANTONE 424C)

"P2"
USB SERIES "B"
LEFT ANGLE PLUG
CONTACTS: 30 x INCHES
GOLD PLATING

"P1" WIRING DIAGRAM


"P2"

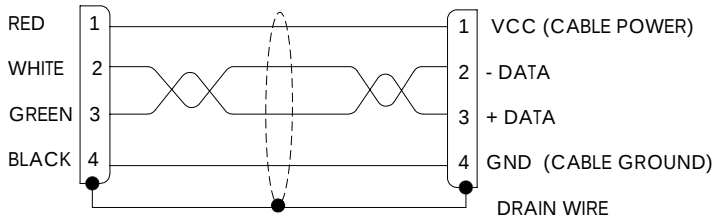

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

PART NUMBER	LENGTH	
	METERS	FEET
CA90LA-90LB-03M	0.3	.98
CA90LA-90LB-05M	0.5	1.64
CA90LA-90LB-075M	0.75	2.46
CA90LA-90LB-1M	1.0	3.28
CA90LA-90LB-2M	2.0	6.56
CA90LA-90LB-3M	3.0	9.84
CA90LA-90LB-4M	4.0	13.12
CA90LA-90LB-5M	5.0	16.40

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: 012 [305] = +1 [25] / -0 >12 [305] 060 [1524] = +2 [51] / -0 >60 [1524] 0120 [3048] = +4 [102] / -0 >120 [3048] 0300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = 0.2 .XX = 0.02 .XXX = 0.005 PROJECTION 	APPROVALS DRAWN BY D. CASTRO CHECKED BY D. PARHAM APPROVED BY S. SMITH	DATE 9/28/10 9/30/10 9/30/10	Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 CATEGORY USB PRODUCT DESCRIPTION CA USB 90LT A/90LT B DX			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY					
	COLOR VARIATIONS MAY OCCUR		SIZE A			
			FSCM NO. 43321		DWG. NO. CA90LA-90LB	REV. C
		SCALE: NONE			CAD FILE: CA90LA-90LB.SLDDRW	SHEET 1 OF 1