
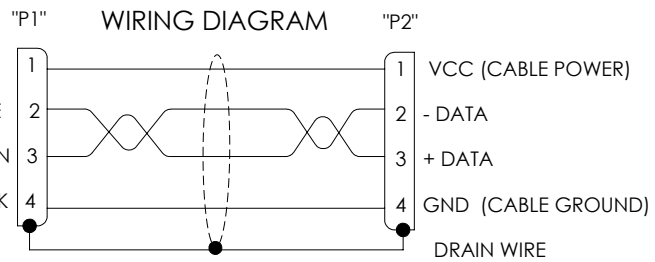


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

| REVISIONS | | | |
|-----------|-----------------|----------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 10/31/12 | D.GRIFFIN |
| | | | |
| | | | |

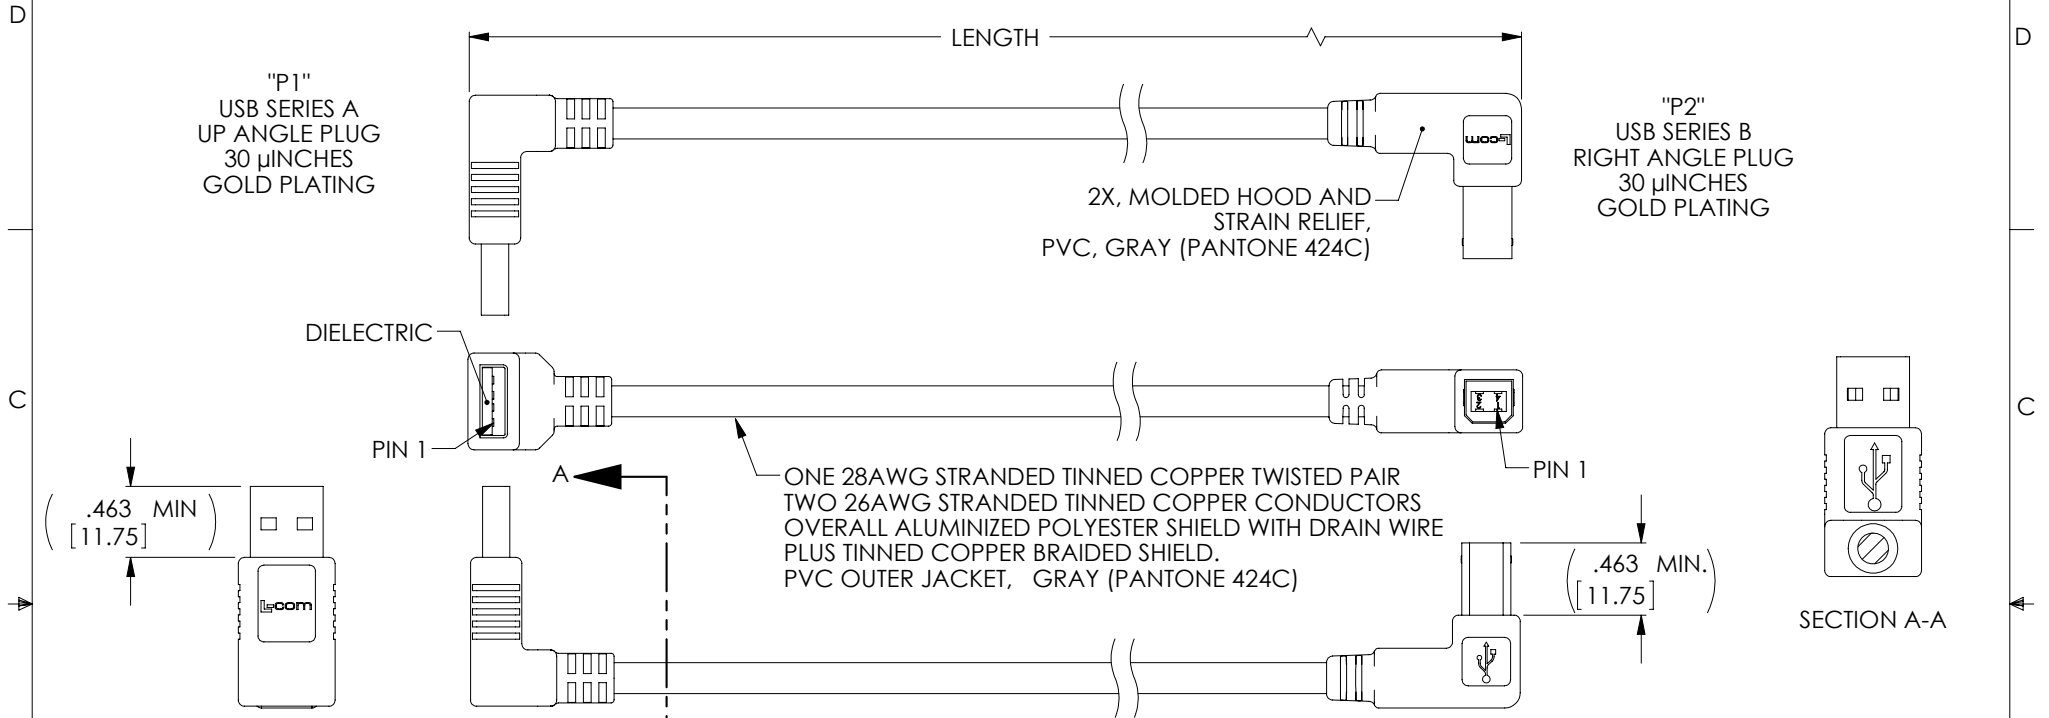

| PART NUMBER | LENGTH | |
|------------------|--------|-------|
| | METERS | FEET |
| CA90UA-90RB-03M | 0.3 | .98 |
| CA90UA-90RB-05M | 0.5 | 1.64 |
| CA90UA-90RB-075M | 0.75 | 2.46 |
| CA90UA-90RB-1M | 1.0 | 3.28 |
| CA90UA-90RB-2M | 2.0 | 6.56 |
| CA90UA-90RB-3M | 3.0 | 9.84 |
| CA90UA-90RB-4M | 4.0 | 13.12 |
| CA90UA-90RB-5M | 5.0 | 16.41 |

- NOTES:
1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

| | | | | |
|---|--|----------------------------|---|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% | APPROVALS | DATE | | 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 |
| | DRAWN BY D. DESJARDIN | 10/30/12 | | |
| ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005 | CHECKED BY D. FRISIELLO | 10/30/12 | CATEGORY USB | |
| | APPROVED BY S. SMITH | 10/31/12 | PRODUCT DESCRIPTION CA USB 90UP A/90RT B DX | |
| PROJECTION | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | COLOR VARIATIONS MAY OCCUR | SIZE A | FSCM NO. 43321 |
| | | | DWG. NO. CA90UA-90RB | REV. A |
| | | | SCALE: NONE | CAD FILE: CA90UA-90RB.SLDDRW |
| | | | | SHEET 1 OF 1 |