



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/14/10	D.GRIFFIN
B	ECN 5868: ADDED LENGTHS 03 M, 075 M, AND 4 M	12/1/11	D.FRISIELLO
C	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/13/12	DFP

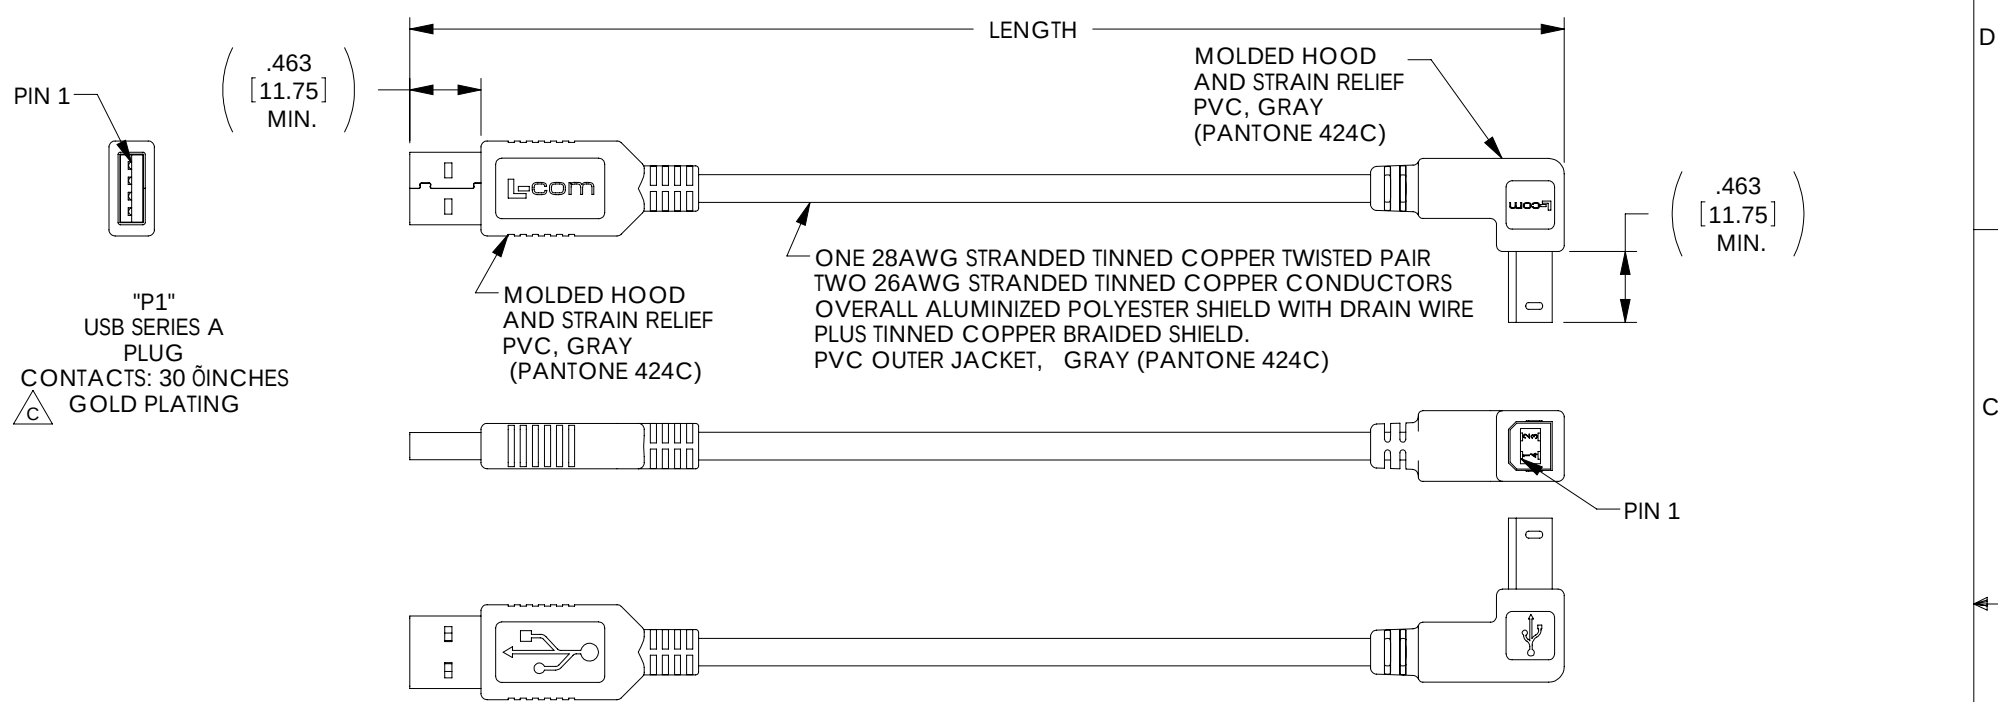

"P1" WIRING DIAGRAM

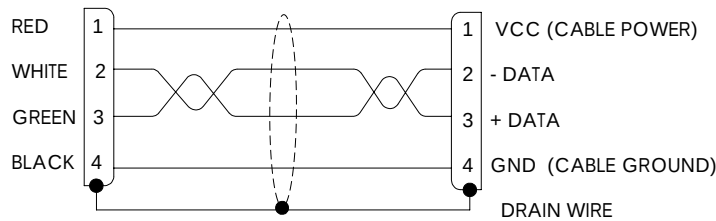

MODEL NUMBER	LENGTH METERS [FEET]
CAA-90DB-03M	0.3 [.98]
CAA-90DB-05M	0.5 [1.64]
CAA-90DB-075M	0.75 [2.46]
CAA-90DB-1M	1.0 [3.28]
CAA-90DB-2M	2.0 [6.56]
CAA-90DB-3M	3.0 [9.84]
CAA-90DB-4M	4.0 [13.12]
CAA-90DB-5M	5.0 [16.41]

"P2"
USB SERIES B PLUG
RIGHT ANGLE
CONTACTS: 30 ØINCHES
GOLD PLATING

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: 012 [305] = +1 [25] / -0 >12 [305] 060 [1524] = +2 [51] / -0 >60 [1524] 0120 [3048] = +4 [102] / -0 >120 [3048] 0300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = N .2 .XX = N .02 .XXX = N .005	APPROVALS	DATE	Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	DRAWN BY D.FRISIELLO	9/29/10			CATEGORY USB	
	CHECKED BY C.BRAN	9/29/10				
	APPROVED BY S.SMITH	9/29/10				
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION CA USB STR A/90DN B DX			
	COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321	DWG. NO. CAA-90DB	REV. C
			SCALE: NONE CAD FILE: CAA-90DB.SLDDRW			SHEET 1 OF 1