



8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/12	D.GRIFFIN
B	ECN 6451: UPDATED NOTES & WIRING MAP. CHANGED EXPOSED CONN. DIM.	10/10/12	D. DESJARDIN
B	ECN 99999: UPDATE TO CORRECT ORIENTATION OF LOGO ON MINI END	1/26/16	S.LI

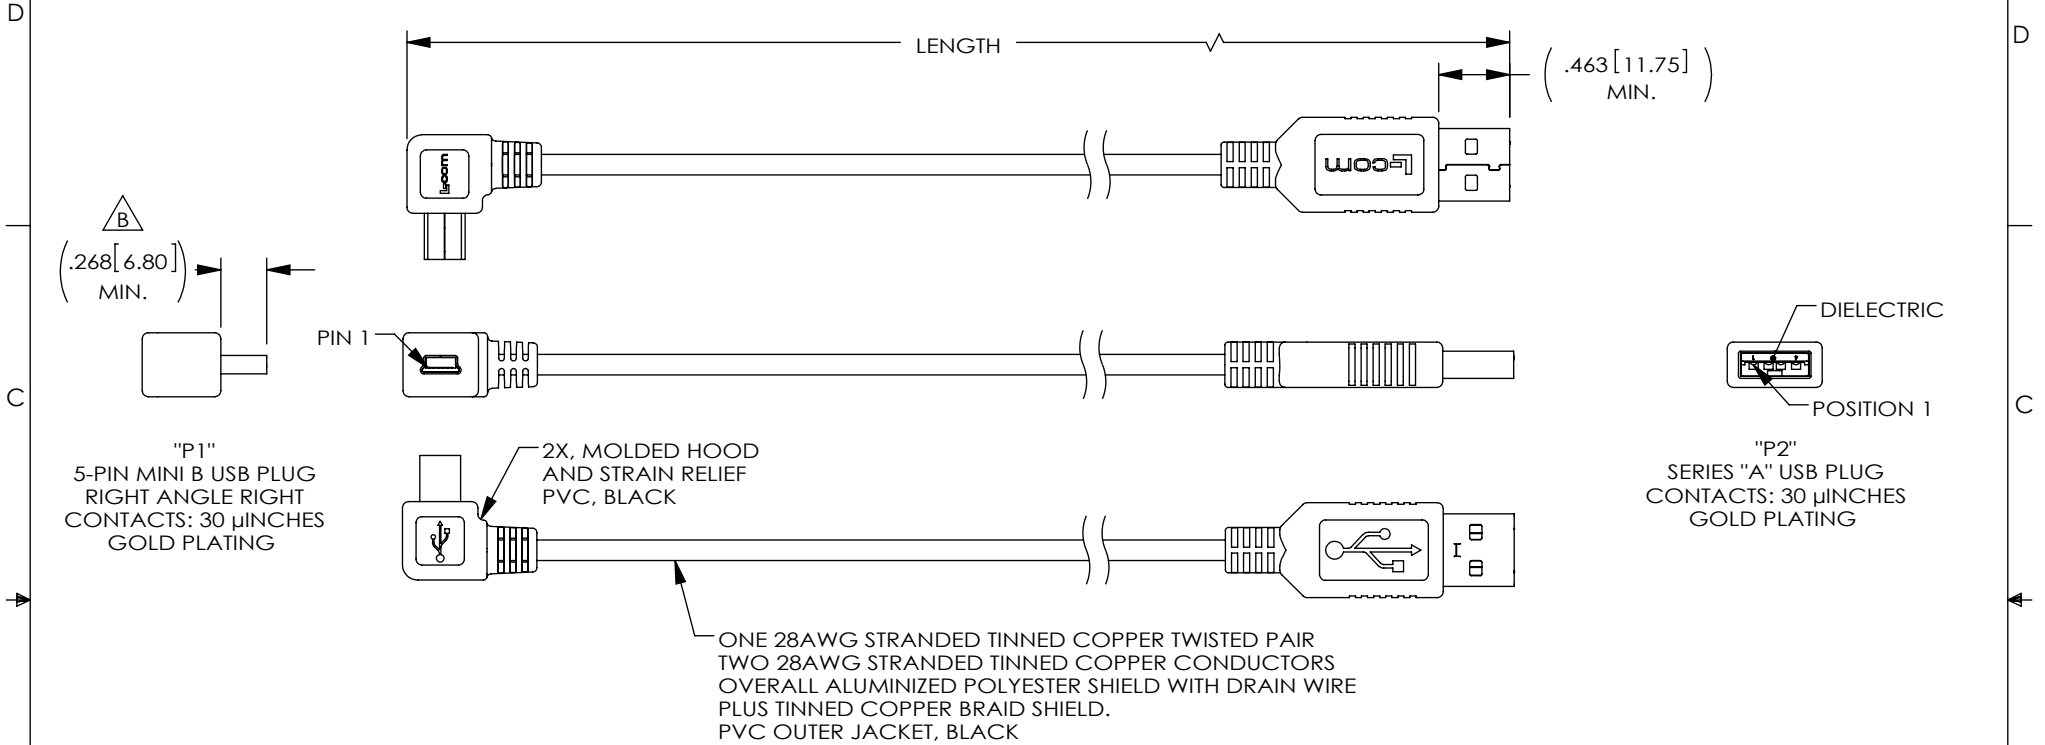

MODEL NUMBER	LENGTH METERS [FEET]
CAA-90RMB5-03M	.3 [.98]
CAA-90RMB5-05M	.5 [1.64]
CAA-90RMB5-075M	.75 [2.46]
CAA-90RMB5-1M	1.0 [3.28]
CAA-90RMB5-2M	2.0 [6.56]
CAA-90RMB5-3M	3.0 [9.84]
CAA-90RMB5-5M	5.0 [16.41]

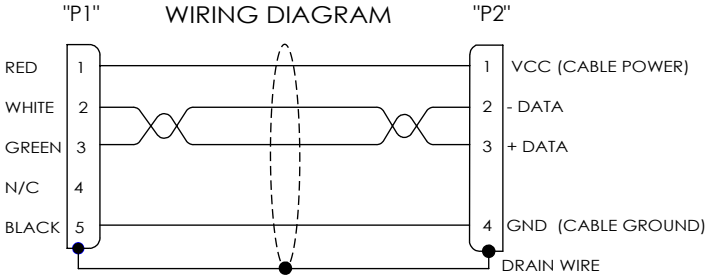

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13] PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	5/17/11		
	CHECKED BY D.CASTRO	5/17/11	CATEGORY USB	
	APPROVED BY S.SMITH	5/17/11	PRODUCT DESCRIPTION CA USB STR A/90RT MB5	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. CAA-90RMB5
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: CAA-90RMB5.SLDDRW	REV. B
		SHEET 1 OF 1		