

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/13/10	D.GRIFFIN
B	ECN 5868: ADDED LENGTHS 03 M, 075 M, AND 4 M	12/1/11	D.FRISIELLO
C	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/13/12	DFP

(.463 MIN
[11.75])


ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 26AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAIDED SHIELD.
PVC OUTER JACKET, GRAY (PANTONE 424C)

(.463 MIN
[11.75])

"P1"
USB SERIES A
PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

"P2"
USB SERIES B PLUG
UP ANGLE
CONTACTS: 30 μINCHES
GOLD PLATING


MOLDED HOOD
AND STRAIN RELIEF,
PVC, GRAY (PANTONE 424C)

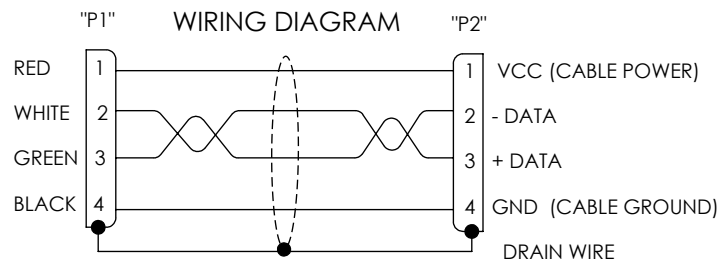

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

PART NUMBER	LENGTH	
	METERS	FEET
CAA-90UB-03M	0.3	.98
CAA-90UB-05M	0.5	1.64
CAA-90UB-075M	0.75	2.46
CAA-90UB-1M	1.0	3.28
CAA-90UB-2M	2.0	6.56
CAA-90UB-3M	3.0	9.84
CAA-90UB-4M	4.0	13.12
CAA-90UB-5M	5.0	16.40

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D. CASTRO	9/29/10		
	CHECKED BY D. PARHAM	9/30/10	CATEGORY USB	
	APPROVED BY S. SMITH	9/30/10	PRODUCT DESCRIPTION CA USB STR A/90UP B DX	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: CAA-90UB.SLDDRW	REV. C
		DWG. NO. CAA-90UB		SHEET 1 OF 1