



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/2/12	D.GRIFFIN
B	ECN 6451: UPDATED NOTES & WIRING MAP. CHANGED EXPOSED CONN. DIM.	10/10/12	D. DESJARDIN

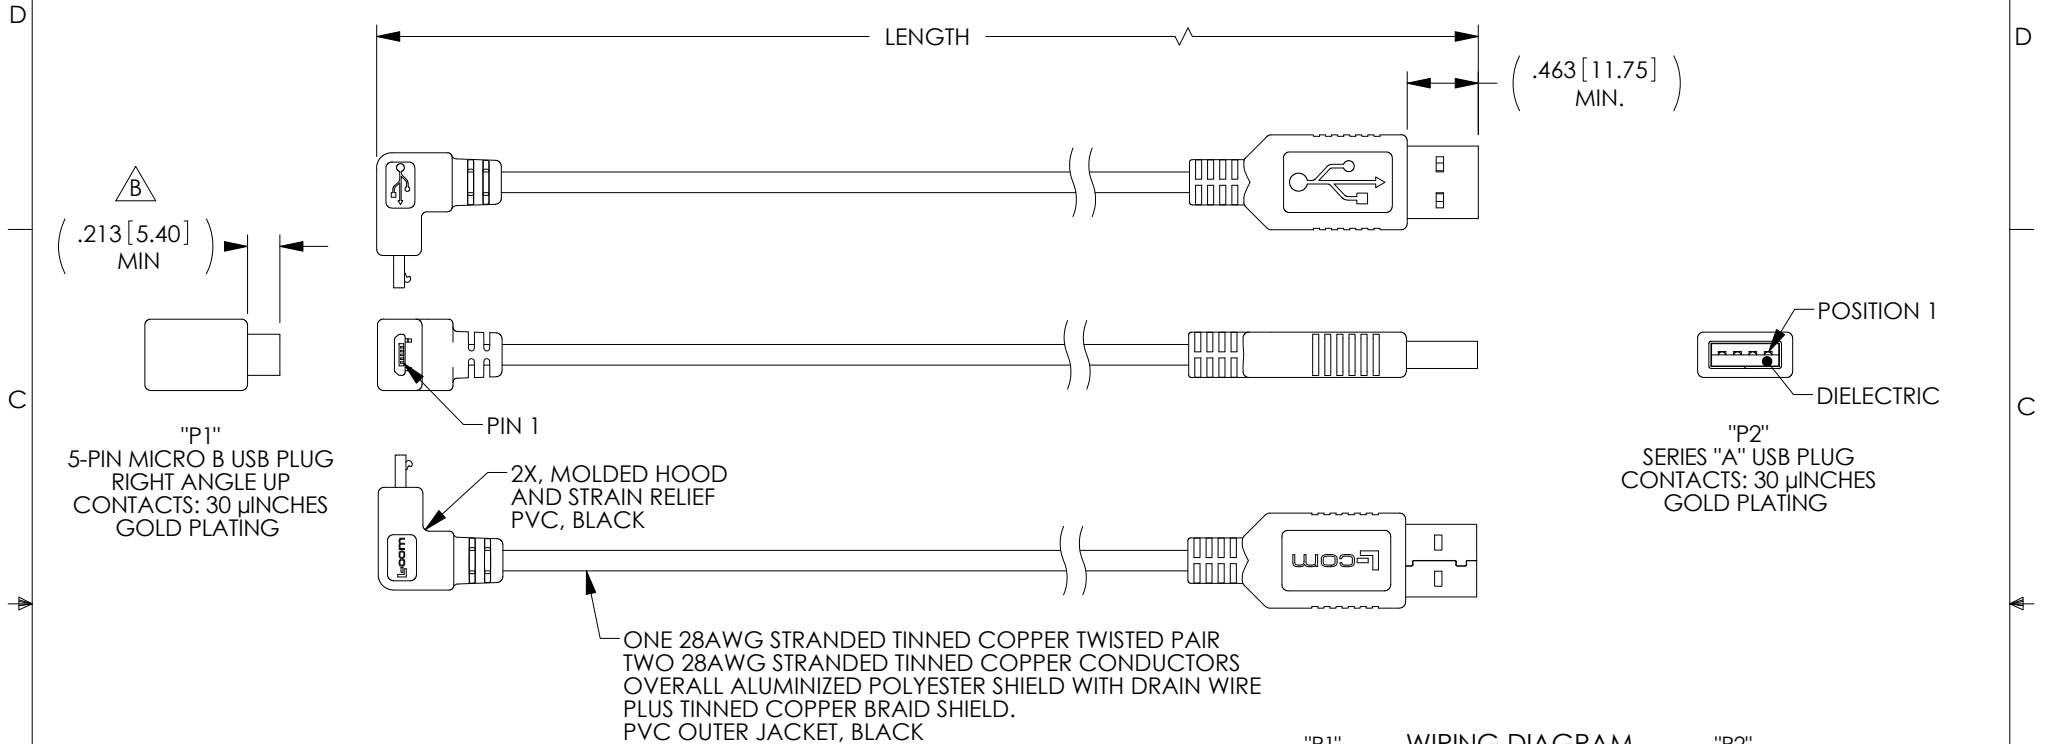

MODEL NUMBER	LENGTH METERS [FEET]
CAA-90UMICB-03M	.3 [.98]
CAA-90UMICB-05M	.5 [1.64]
CAA-90UMICB-075M	.75 [2.46]
CAA-90UMICB-1M	1.0 [3.28]
CAA-90UMICB-2M	2.0 [6.56]
CAA-90UMICB-3M	3.0 [9.84]
CAA-90UMICB-5M	5.0 [16.41]

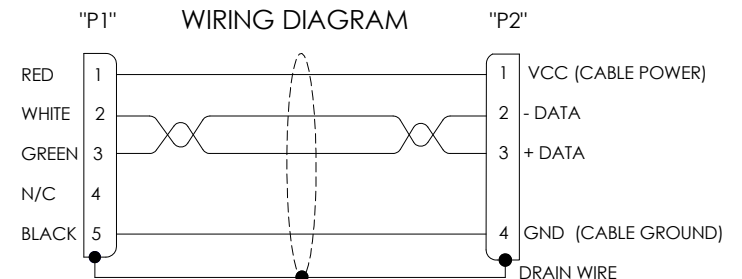

B

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005 PROJECTION 	APPROVALS DRAWN BY D.FRISIELLO CHECKED BY D. CASTRO APPROVED BY S. SMITH	DATE 5/20/11 5/20/11 5/20/11	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 CATEGORY USB PRODUCT DESCRIPTION CA USB STR A-M/90UP MICB
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	
	SIZE A	FSCM NO. 43321	
	SCALE: NONE	CAD FILE: CAA-90UMICB.SLDDRW	
DWG. NO. CAA-90UMICB		REV. B	SHEET 1 OF 1