


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/28/14	D.GRIFFIN

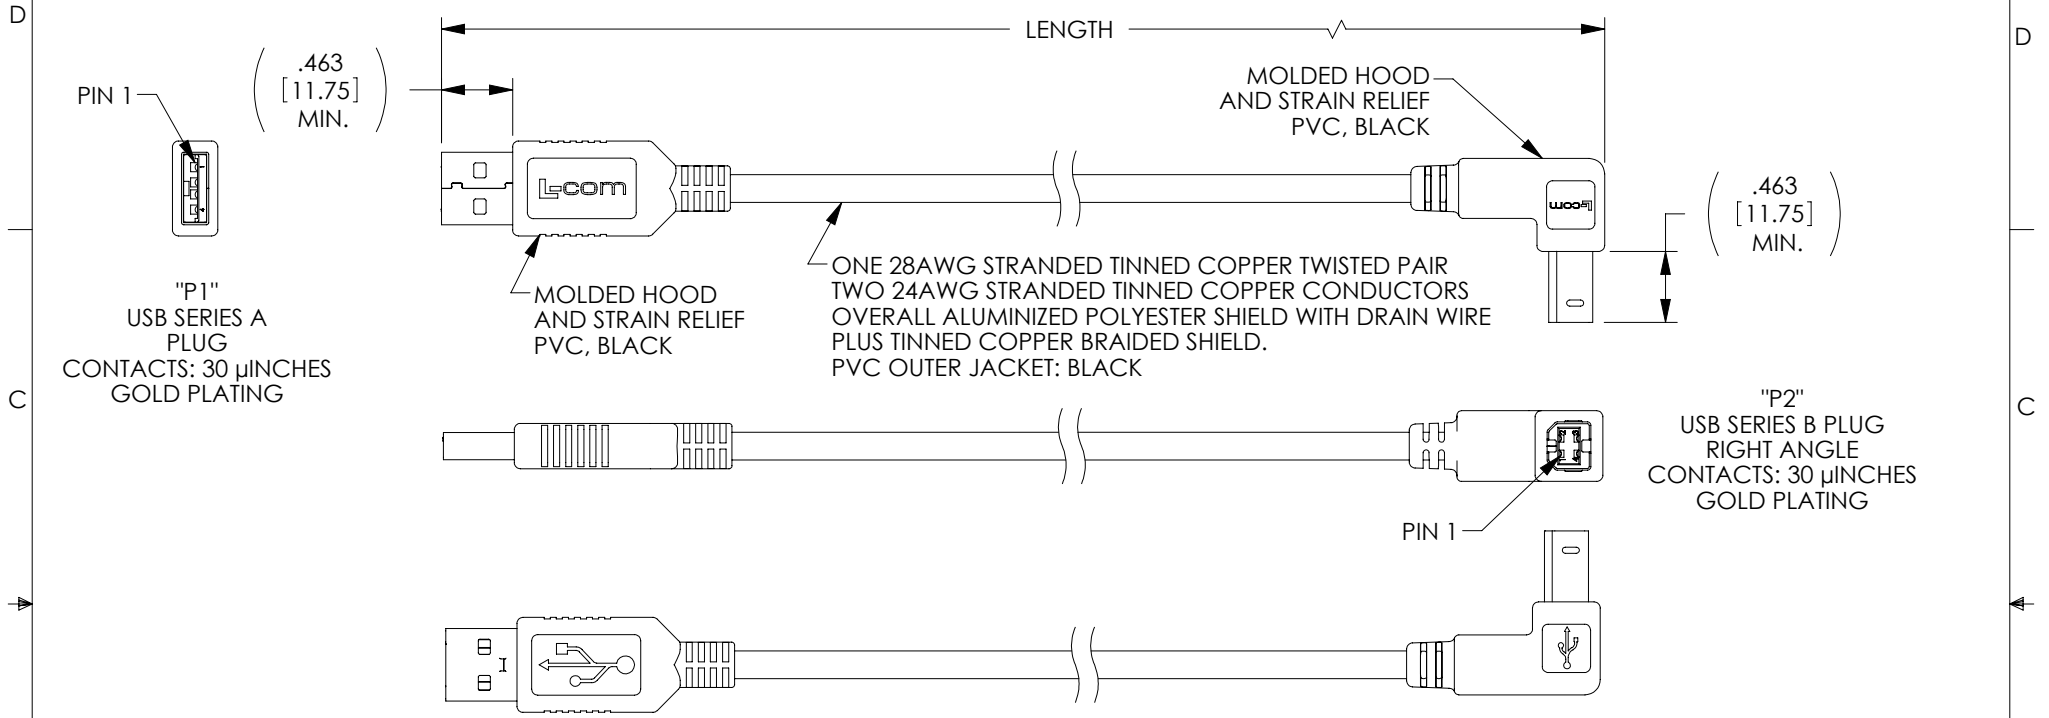

"P1"
USB SERIES A
PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

"P2"
USB SERIES B PLUG
RIGHT ANGLE
CONTACTS: 30 μINCHES
GOLD PLATING

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 24AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAIDED SHIELD.
PVC OUTER JACKET: BLACK

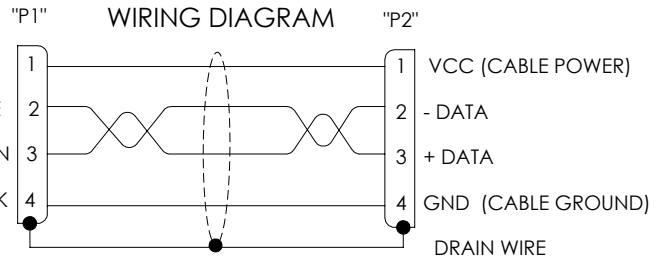

MODEL NUMBER	LENGTH METERS [FEET]
CAABLK-90DB-03M	0.3 [.98]
CAABLK-90DB-05M	0.5 [1.64]
CAABLK-90DB-1M	1.0 [3.28]
CAABLK-90DB-2M	2.0 [6.56]
CAABLK-90DB-3M	3.0 [9.84]
CAABLK-90DB-5M	5.0 [16.41]

- NOTES:**
1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.3]	APPROVALS DRAWN BY D.FRISIELLO CHECKED BY R.SCOTT APPROVED BY S.SMITH	DATE 1/24/14 1/24/14 1/24/14	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY USB
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
	PRODUCT DESCRIPTION CA USB STR A/90DB B BLK		DWG. NO. CAABLK-90DB	REV. A
SCALE: NONE		CAD FILE: CAABLK-90DB.SLDDRW	SHEET 1 OF 1	