


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 10454: UPDATE B PLUG VIEW	04/01/2020	DGUTTADAURO

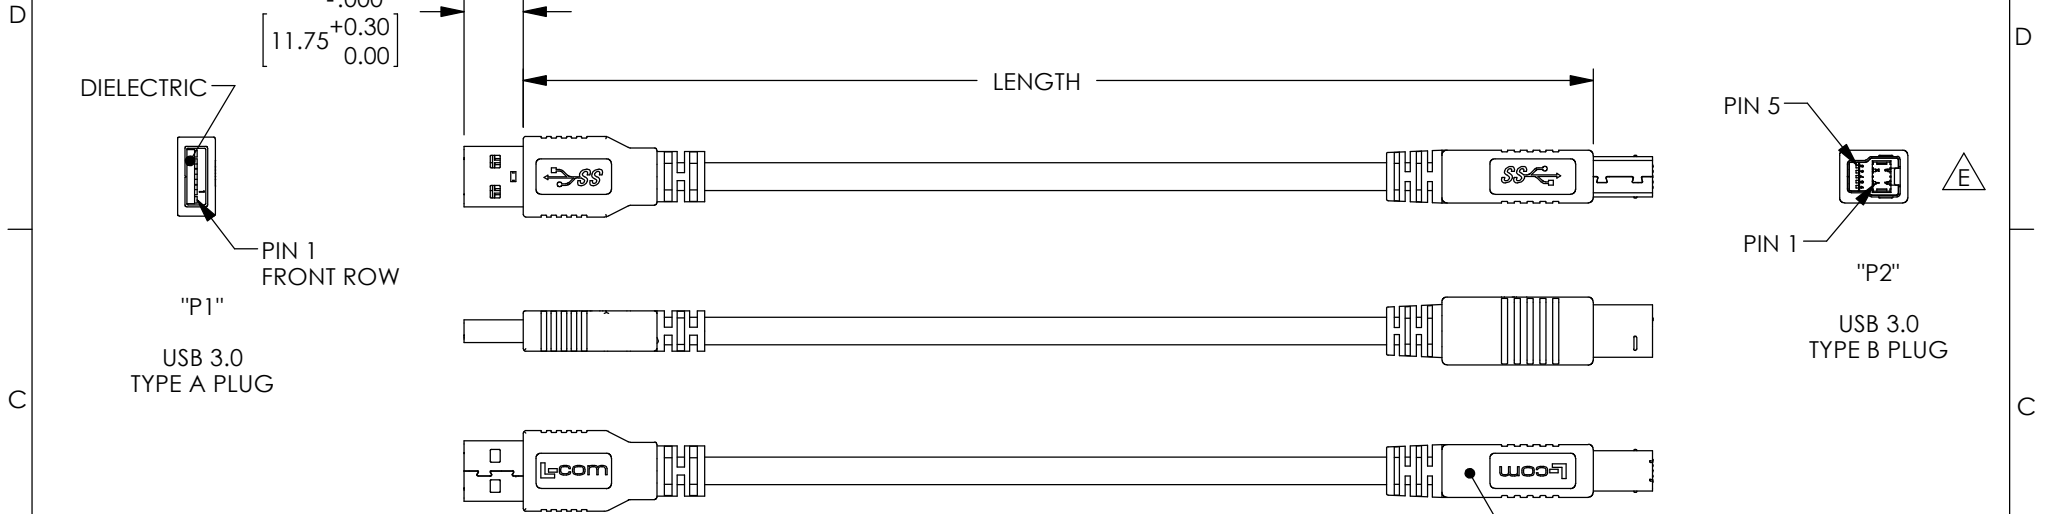

"P1"	WIRING MAP	"P2"
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN WIRE	7
8	PURPLE	8
9	ORANGE	9
SHELL	BRAID	SHELL

MODEL NUMBER	LENGTH METERS [FEET]
CAU3AB-03M	0.3 [.98]
CAU3AB-05M	0.5 [1.64]
CAU3AB-075M	0.75 [2.46]
CAU3AB-1M	1.0 [3.28]
CAU3AB-2M	2.0 [6.56]
CAU3AB-3M	3.0 [9.84]
CAU3AB-5M	5.0 [16.41]

**NOTES:**



CABLE: UL STYLE 20276, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65% JACKET: PVC, BLUE (PANTONE 300C)

**MISCELLANEOUS:**

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION. CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS DRAWN BY D.FRISIELLO	DATE 4/2/10	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	CHECKED BY M.MARTINEZ	4/2/10	
THIRD-ANGLE PROJECTION 	APPROVED BY S.SMITH	4/2/10	PRODUCT DESCRIPTION CA, USB 3.0 TYPE A-M TO TYPE B-M
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	CAGE CODE <b>43321</b>
DWG. NO. <b>CAU3AB</b>	REV. <b>E</b>	SCALE: NONE	CAD FILE: CAU3AB.SLDDRW
SHEET 1 OF 1			