






THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6991: CHANGED SR TO PVC. UPD CONNECTOR PICTORALLY. ROHS NOTE	8/2/13	D. DESJARDIN

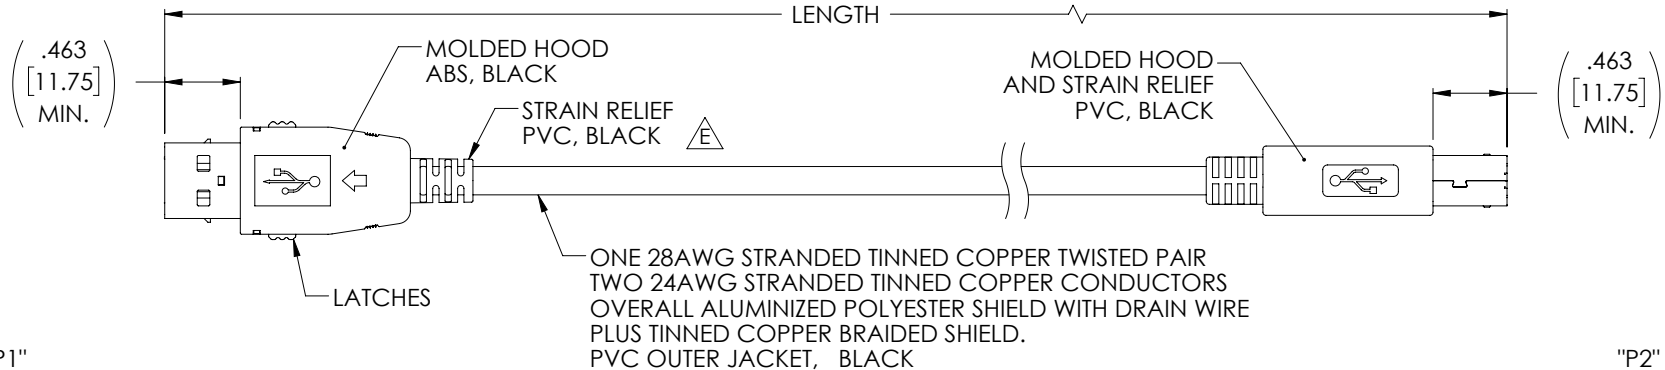

L-COM LOGO
ONE SIDE

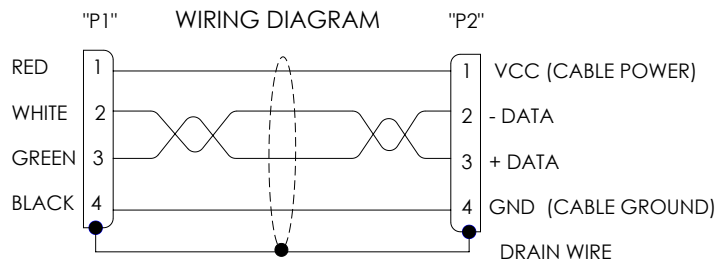

MODEL NUMBER	LENGTH METERS [FEET]
CAUALB-03M	0.3 [.98]
CAUALB-05M	0.5 [1.64]
CAUALB-075M	0.75 [2.46]
CAUALB-1M	1.0 [3.28]
CAUALB-2M	2.0 [6.56]
CAUALB-3M	3.0 [9.84]
CAUALB-4M	4.0 [13.12]
CAUALB-5M	5.0 [16.40]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13]	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	10/23/09		
	CHECKED BY M.MARTINEZ	10/23/09	CATEGORY USB	
	APPROVED BY S.SMITH	10/23/09	PRODUCT DESCRIPTION CBL,USB A LATCH/STD B BLK	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CAUALB
		SCALE: NONE	CAD FILE: CAUALB.SLDDRW	REV. E
		SHEET 1 OF 1		