


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	04/24/17	RCLARK

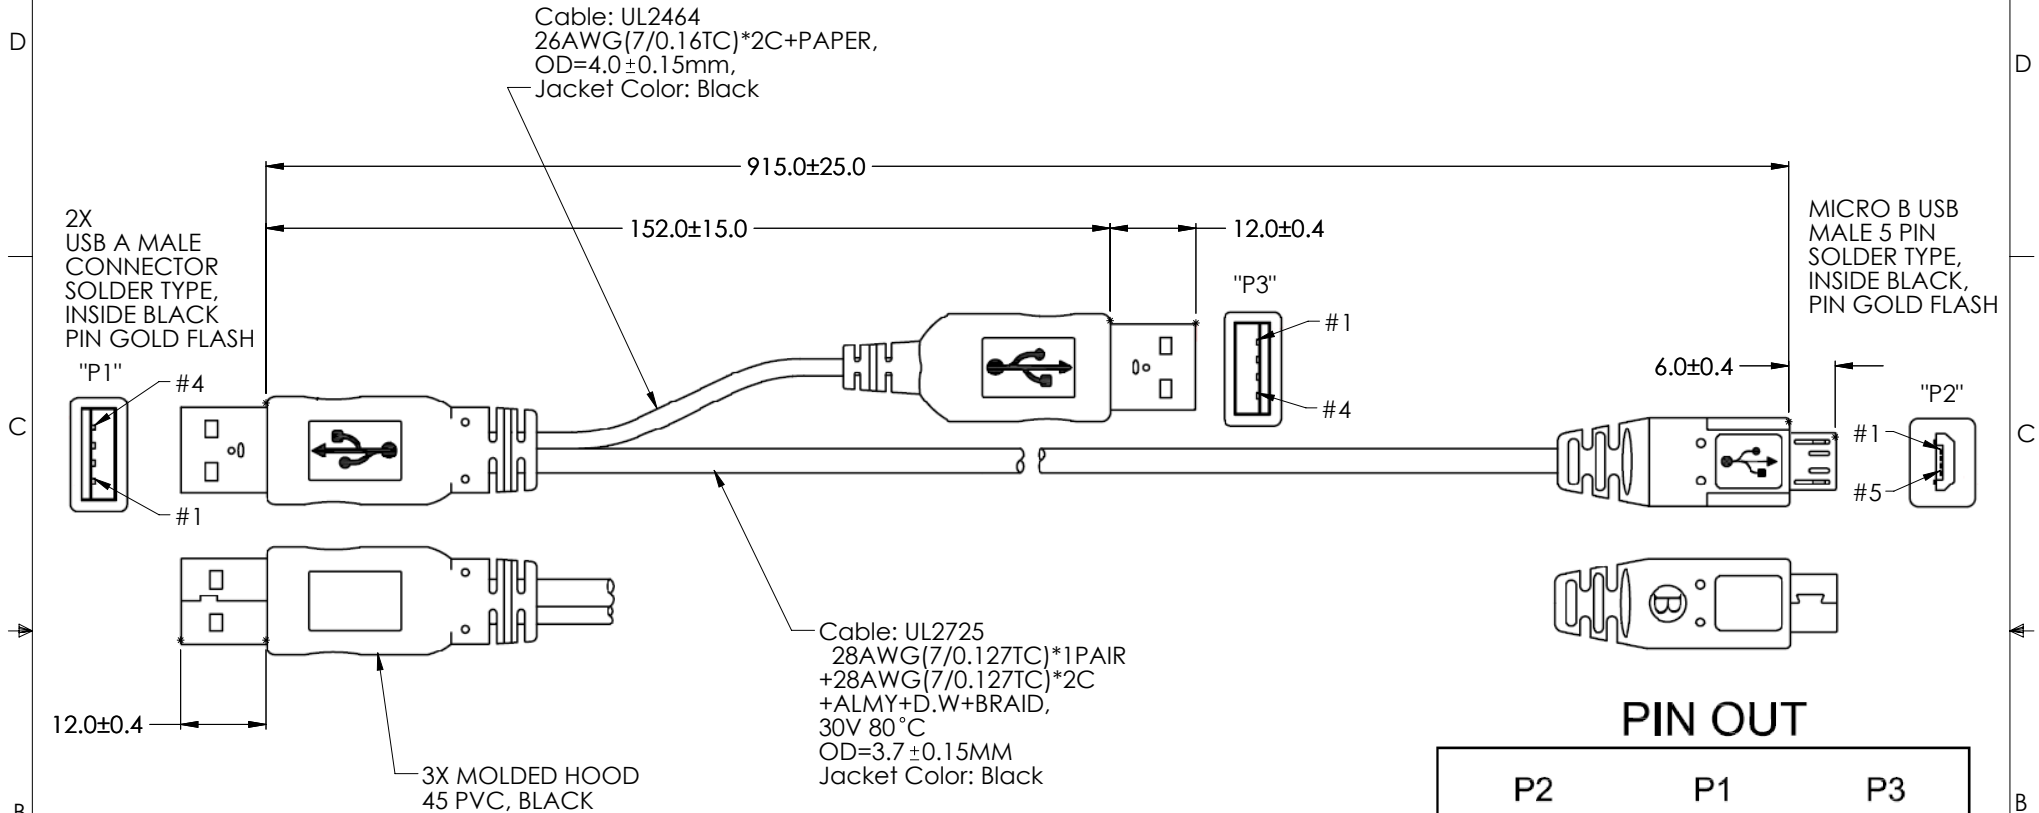

NOTES:

TESTING:

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY

ELECTRICAL PROPERTIES:


- CABLE SHALL BE 100% ELECTRICALLY TESTED
- VOLTAGE TEST: DC 300V 10ms
- INSULATION RESISTANCE: 5.0M ohm/min
- CONDUCTANCE RESISTANCE: 5.0 ohm/max

MACHINERY CHARACTER:

- ALL DIMENSIONS ARE "mm" UNLESS OTHERWISE SPECIFIED
- CABLE SHOULD BE CLEAN AND FREE OF OIL, FLASH, AND BURRS

REGULATORY COMPLIANCE:

CE 2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13]	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY R.CLARK	4/20/2017		
	CHECKED BY B.GATES	4/24/2017	CATEGORY	USB
	APPROVED BY B.GATES	4/24/2017	PRODUCT DESCRIPTION	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		USB A TO MICRO B-USB Y SPLIT	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CAUAMICBY
		SCALE: NONE	CAD FILE: CAUAMICBY.SLDDRW	REV. A
				SHEET 1 OF 1