


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/25/13	D.GRIFFIN
B	ECN 8758: ADDED DIMENSION FOR PANEL MOUNT	5/8/17	D.FRISIELLO

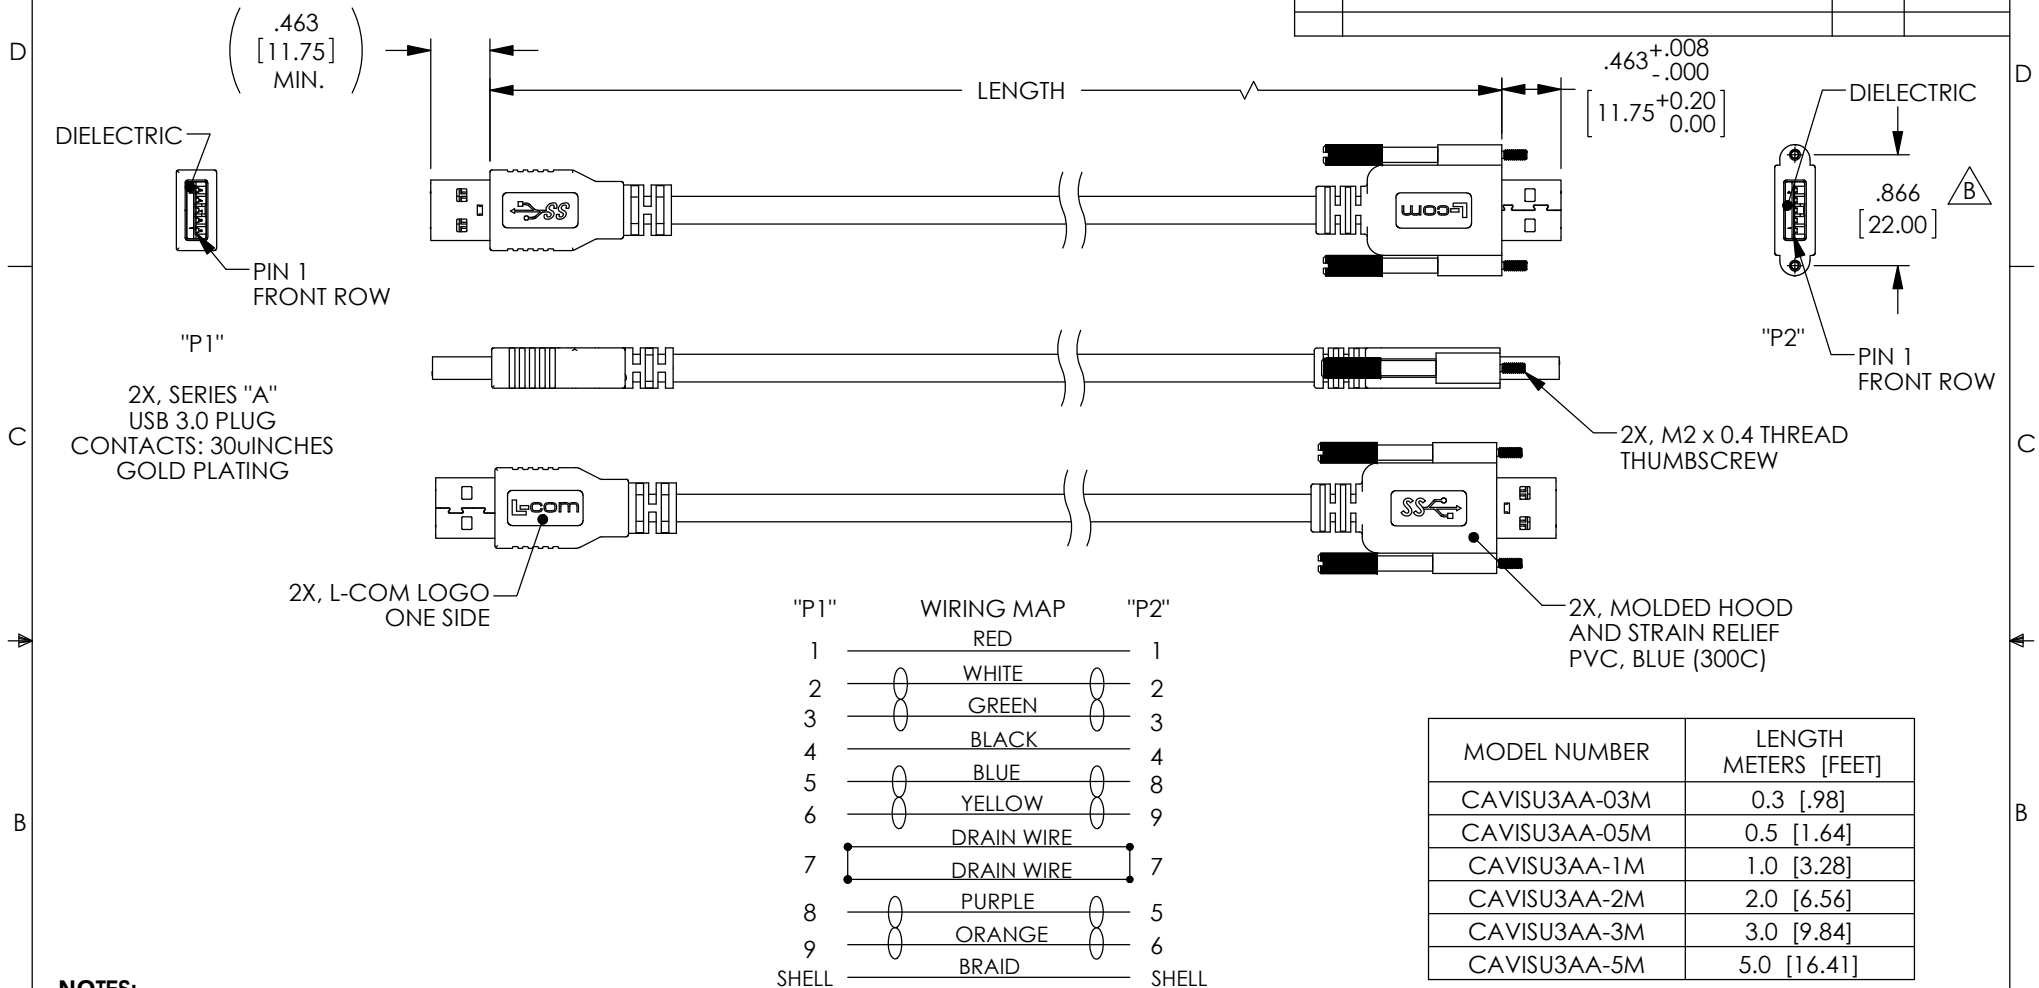

NOTES:


CABLE: UL STYLE 20276, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65% JACKET: PVC, BLUE (PANTONE 300C)

MISCELLANEOUS:

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION. CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	DRAWN BY D.FRISIELLO	6/3/13				
	CHECKED BY D.DESJARDIN	6/3/13	CATEGORY	USB		
	APPROVED BY S.SMITH	6/3/13	PRODUCT DESCRIPTION			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CA USB3.0 A/A W/Hardware VISION 3.0			
PROJECTION 	COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321	DWG. NO. CAVISU3AA	REV. B
			SCALE: NONE	CAD FILE: CAVISU3AA.SLDDRW		SHEET 1 OF 1