


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-----------------|---------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 2/17/14 | D.GRIFFIN |
| | | | |
| | | | |

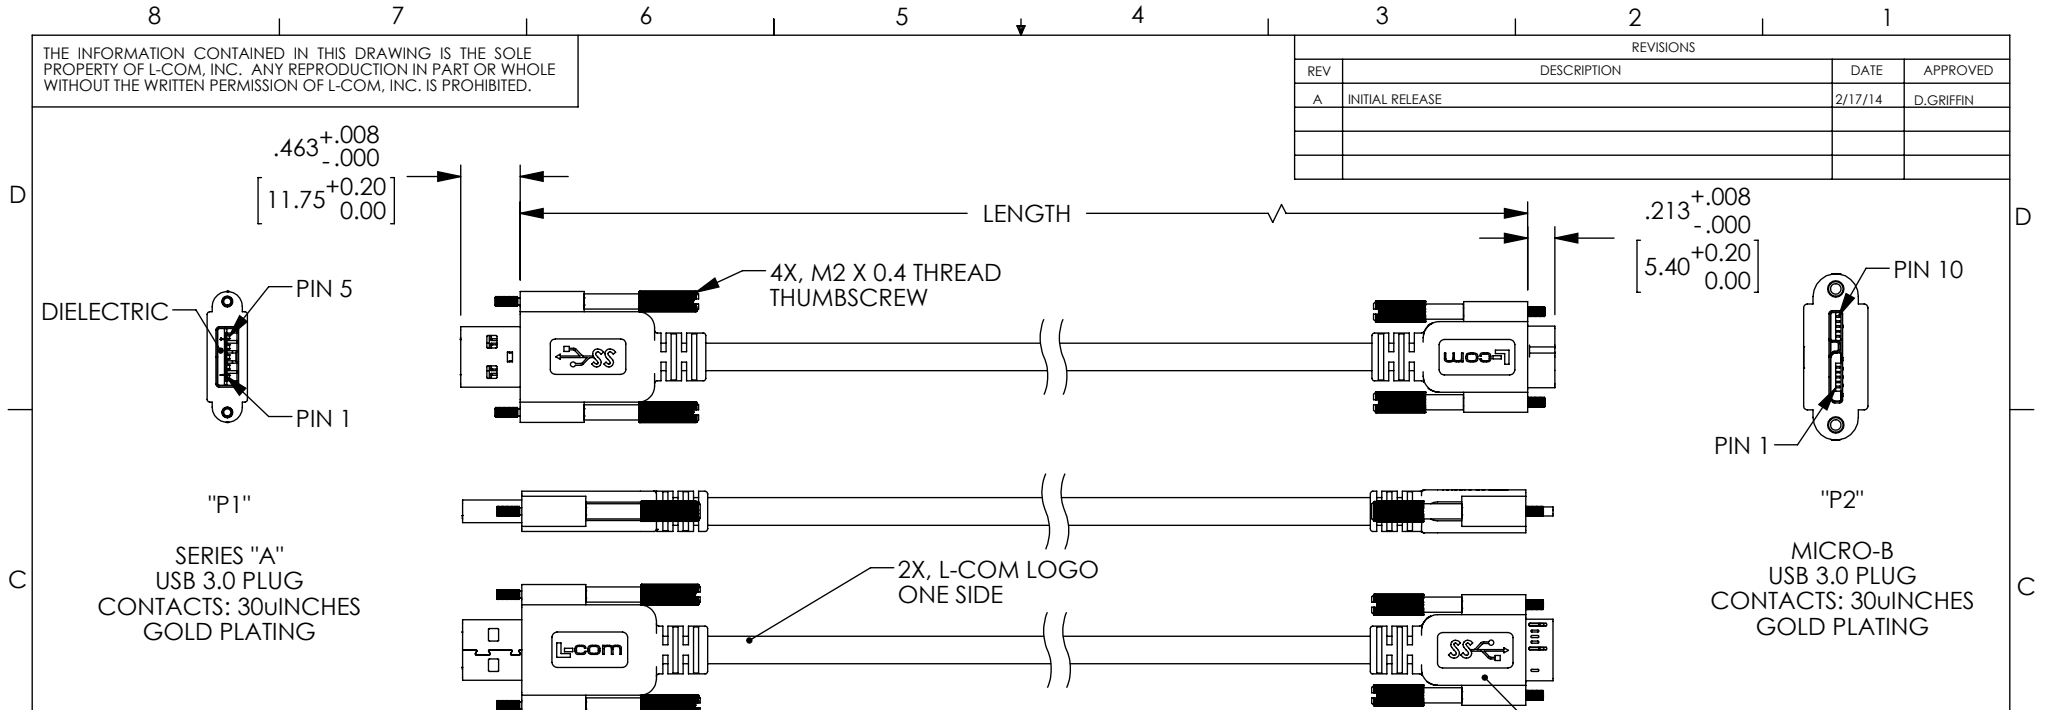

"P1"
SERIES "A"
USB 3.0 PLUG
CONTACTS: 30uINCHES
GOLD PLATING

"P2"
MICRO-B
USB 3.0 PLUG
CONTACTS: 30uINCHES
GOLD PLATING

| "P1" | WIRING MAP | "P2" |
|-------|------------|-------|
| 1 | RED | 1 |
| 2 | WHITE | 2 |
| 3 | GREEN | 3 |
| 4 | BLACK | 5 |
| 5 | BLUE | 6 |
| 6 | YELLOW | 7 |
| 7 | DRAIN WIRE | 8 |
| 8 | DRAIN WIRE | 8 |
| 8 | PURPLE | 9 |
| 9 | ORANGE | 10 |
| SHELL | BRAID | SHELL |

| MODEL NUMBER | LENGTH METERS [FEET] |
|--------------------|----------------------|
| CAVISU3AMICB-2-03M | 0.3 [.98] |
| CAVISU3AMICB-2-05M | 0.5 [1.64] |
| CAVISU3AMICB-2-1M | 1.0 [3.28] |
| CAVISU3AMICB-2-2M | 2.0 [6.56] |
| CAVISU3AMICB-2-3M | 3.0 [9.84] |
| CAVISU3AMICB-2-5M | 5.0 [16.41] |

NOTES:

CABLE: UL STYLE 20276, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65% JACKET: PVC, BLUE (PANTONE 300C)

MISCELLANEOUS:

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION. CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

| | | | | |
|---|--|----------------------------|----------------------------|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% | APPROVALS | DATE | | 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 |
| | DRAWN BY D.FRISIELLO | 2/14/14 | | CATEGORY |
| ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [1.27] | CHECKED BY D.DESJARDIN | 2/14/14 | PRODUCT DESCRIPTION | |
| PROJECTION | APPROVED BY S.SMITH | 2/14/14 | CA USB3.0 A/MIC B 2X HDW | |
| | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | COLOR VARIATIONS MAY OCCUR | SIZE A | FSCM NO. 43321 |
| | | | DWG. NO. CAVISU3AMICB-2 | REV. A |
| | | | SCALE: NONE | CAD FILE: CAVISU3AMICB-2.SLDDRW |
| | | | SHEET 1 OF 1 | |