


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/12/13	D.GRIFFIN

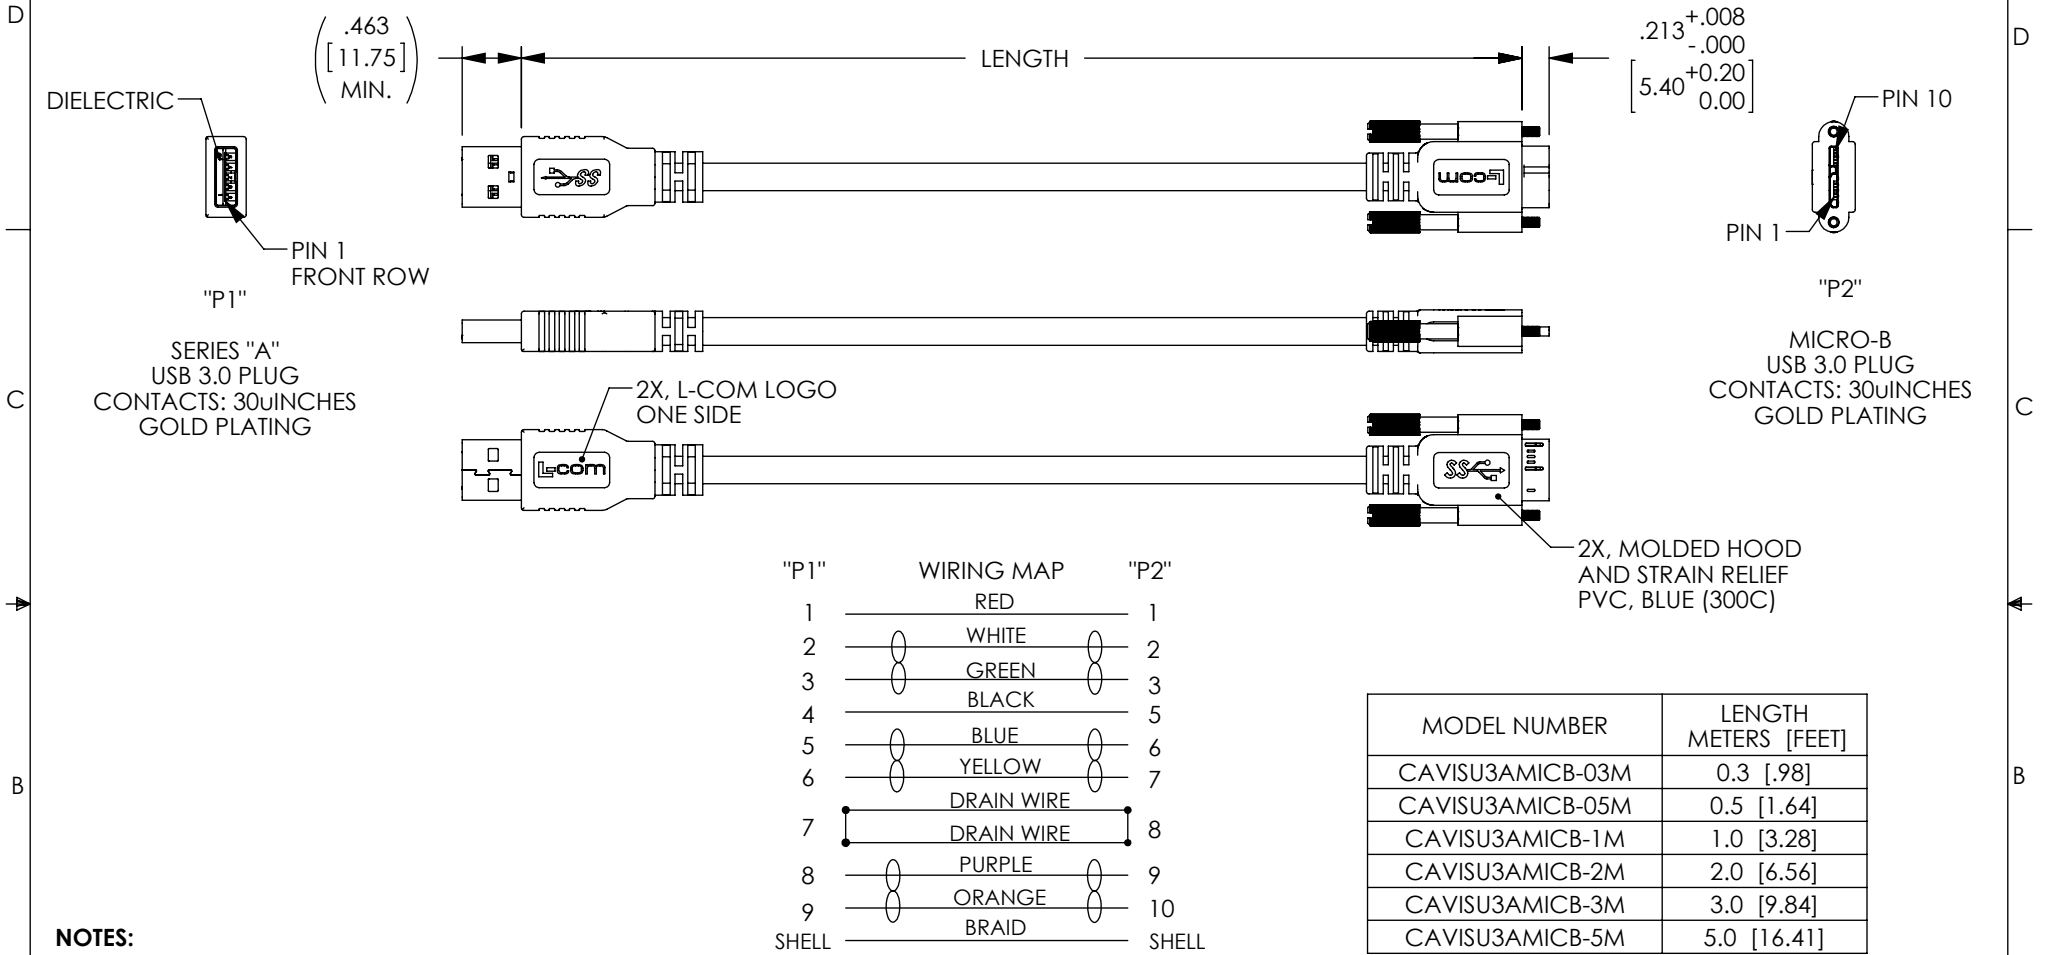

MODEL NUMBER	LENGTH METERS [FEET]
CAVISU3AMICB-03M	0.3 [.98]
CAVISU3AMICB-05M	0.5 [1.64]
CAVISU3AMICB-1M	1.0 [3.28]
CAVISU3AMICB-2M	2.0 [6.56]
CAVISU3AMICB-3M	3.0 [9.84]
CAVISU3AMICB-5M	5.0 [16.41]

NOTES:

CABLE: UL STYLE 20276, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65% JACKET: PVC, BLUE (PANTONE 300C)

MISCELLANEOUS:

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION. CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005 PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	6/3/13		
	CHECKED BY D.DESJARDIN	6/3/13	CATEGORY USB 3.0	
	APPROVED BY S.SMITH	6/3/13	PRODUCT DESCRIPTION CA USB3.0 A/MICRO B W/HDW VISION 3.0	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. CAVISU3AMICB
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: CAVISU3AMICB.SLDDRW	REV. A
		SHEET 1 OF 1		