


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
P	ECN 9562 : ADD -105M TO TABLE	12/09/2018	SLI

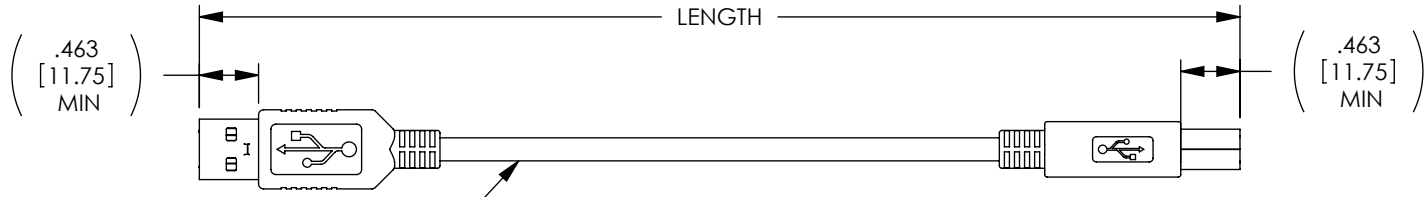

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAIDED SHIELD.
PVC OUTER JACKET, LIGHT GRAY (PANTONE 400C)

MOLDED HOOD
AND STRAIN RELIEF,
PVC, LIGHT GRAY
(PANTONE 400C)



PIN 1

DIELECTRIC
AREA

"P1"
SERIES A
USB PLUG
CONTACTS: 30 μ INCHES
GOLD PLATING

PIN 1

"P2"
SERIES B
USB PLUG
CONTACTS: 30 μ INCHES
GOLD PLATING

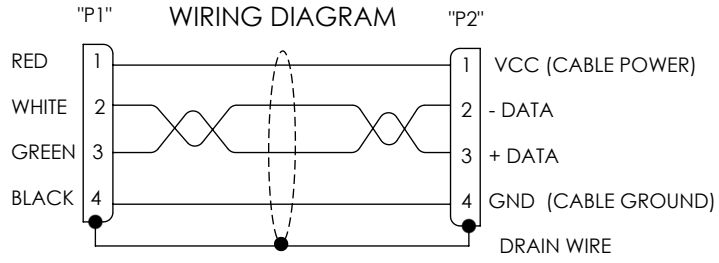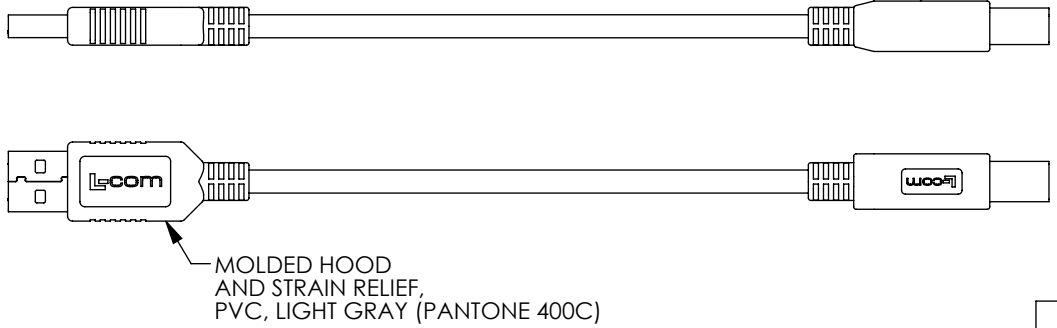

MODEL NUMBER	LENGTH METERS [FEET]
CSMUAB-03M	0.3 [.98]
CSMUAB-05M	0.5 [1.64]
CSMUAB-075M	0.75 [2.46]
CSMUAB-1M	1.0 [3.28]
CSMUAB-105M	1.5 [4.92]
CSMUAB-2M	2.0 [6.56]
CSMUAB-3M	3.0 [9.84]
CSMUAB-4M	4.0 [13.12]
CSMUAB-5M	5.0 [16.40]

- NOTES:
1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13] PROJECTION 	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY TJC	09/25/2000		
	CHECKED BY DFP	09/28/2000		
	APPROVED BY RC	09/28/2000		
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY USB		PRODUCT DESCRIPTION CABLE, USB TYPE A/B	
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CSMUAB	REV. P
SCALE: NONE		CAD FILE: CSMUAB.SLDDRW		SHEET 1 OF 1