


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/13/13	D.GRIFFIN

LENGTH

.463
[11.75]
MIN.

.463
[11.75]
MIN.

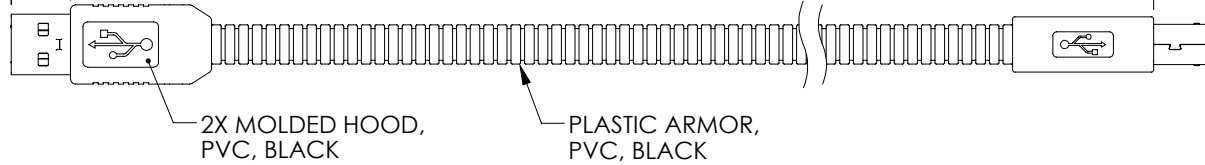


"P1"

PIN 1

DIELECTRIC


SERIES "A"
USB PLUG
CONTACTS: 30μINCHES
GOLD PLATING

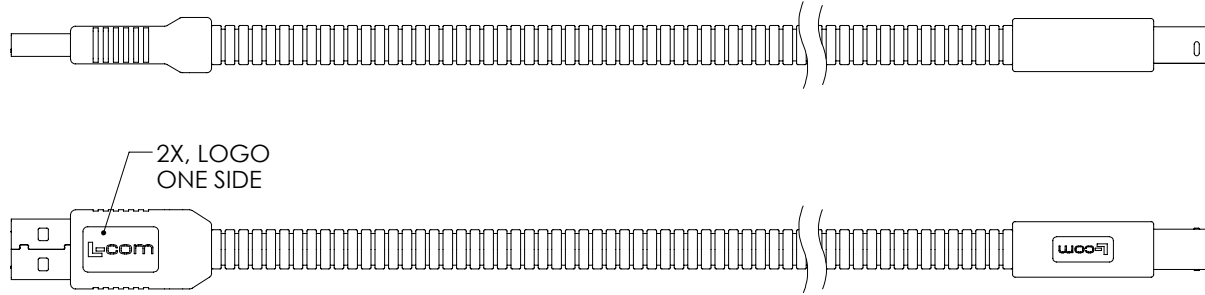

"P2"

PIN 1

SERIES "B"
USB PLUG
CONTACTS: 30μINCHES
GOLD PLATING

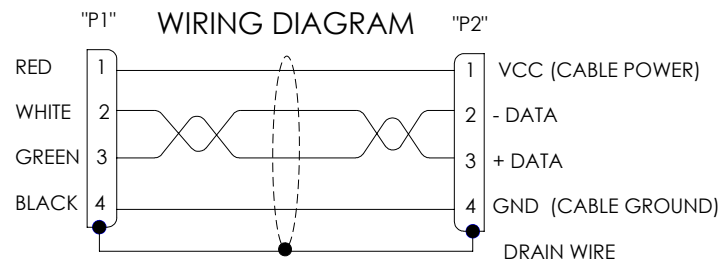

MODEL NO.	LENGTH METERS [FEET]
CSMUAB-PL-03M	0.3 [.98]
CSMUAB-PL-05M	0.5 [1.64]
CSMUAB-PL-1M	1.0 [3.28]
CSMUAB-PL-2M	2.0 [6.56]
CSMUAB-PL-3M	3.0 [9.84]
CSMUAB-PL-4M	4.0 [13.12]
CSMUAB-PL-5M	5.0 [16.41]


NOTES:

CABLE:
UL STYLE 2725,
ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE.
PVC OUTER JACKET, BLACK

MISCELLANEOUS:

1. PLASTIC CRUSH RESISTANCE: 800 PSI (MIN.)
2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
3. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
4. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ±.2 XX = ±.02 .XXX = ±.005 PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D. DESJARDIN	1/3/12		CATEGORY
	CHECKED BY D. FRISIELLO	1/11/13		USB
	APPROVED BY S. SMITH	1/24/13		PRODUCT DESCRIPTION
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CA USB 2.0 A/B PLAS ARMR		
	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CSMUAB-PL
		SCALE: NONE	CAD FILE: CSMUAB-PL.SLDDRW	REV. A
		SHEET 1 OF 1		