


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/5/14	D.GRIFFIN
-	-	-	-
-	-	-	-
-	-	-	-

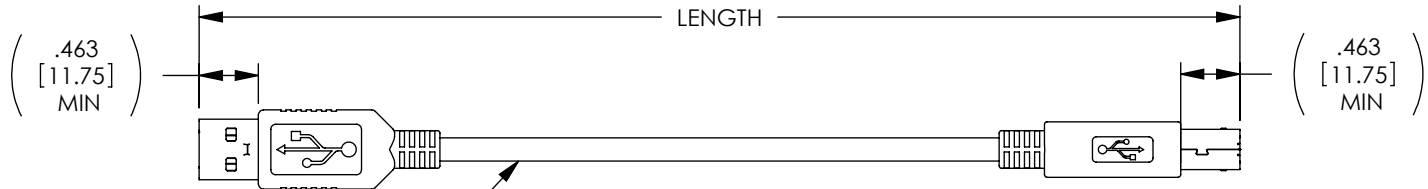


ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAIDED SHIELD.
PVC OUTER JACKET, CLEAR

MOLDED HOOD
AND STRAIN RELIEF,
PVC, CLEAR

PIN 1
DIELECTRIC
AREA
"P1"
SERIES A
USB PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

PIN 1
"P2"
SERIES B
USB PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

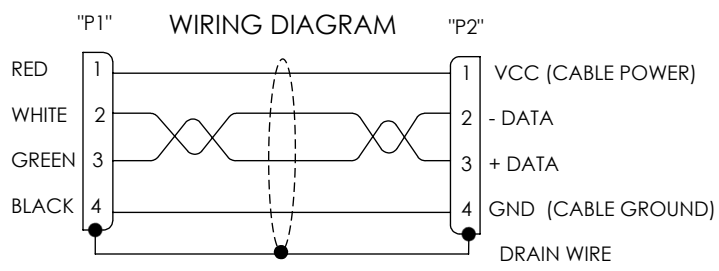

MODEL NUMBER	LENGTH METERS [FEET]
CSMUCLRAB-03M	0.3 [.98]
CSMUCLRAB-05M	0.5 [1.64]
CSMUCLRAB-1M	1.0 [3.28]
CSMUCLRAB-2M	2.0 [6.56]
CSMUCLRAB-3M	3.0 [9.84]
CSMUCLRAB-5M	5.0 [16.40]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.27] PROJECTION 	APPROVALS DRAWN BY D. CASTRO CHECKED BY D. FRISIELLO APPROVED BY S. SMITH	DATE 1/10/14 1/10/14 1/13/14	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 CATEGORY USB PRODUCT DESCRIPTION CA, USB CLEAR TYPE A/B
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	
	SIZE A	FSCM NO. 43321	
	SCALE: NONE	CAD FILE: CSMUCLRAB.SLDDRW	
SHEET 1 OF 1		CSMUCLRAB	REV. A