

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	02/11/09	DFP
B	ECN 5868: ADDED LENGTHS 03 M, 075 M, REVISED FORMAT & PACKAGING	12/8/11	D.FRISIELLO
C	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/18/12	DFP

(2X .463 MIN
[11.75])

LENGTH

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAIDED SHIELD.
LSZH OUTER JACKET, BLACK

"P1"

PIN 1

DIELECTRIC
AREA

2X USB SERIES "A" PLUG
CONTACTS: 30 0INCHES
GOLD PLATING


"P2"

PIN 1

DIELECTRIC
AREA

2X MOLDED HOOD
AND STRAIN RELIEF,
LSZH, BLACK

"P1" WIRING DIAGRAM "P2"

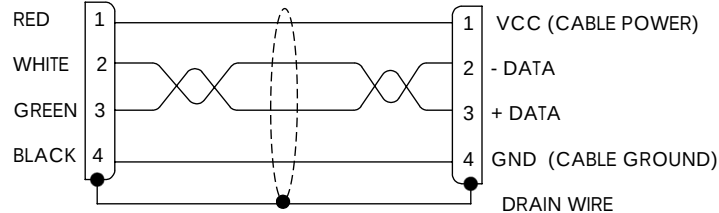


MODEL NUMBER	LENGTH METERS [FEET]
CSUZAA-03M	0.3 [.98]
CSUZAA-05M	0.5 [1.64]
CSUZAA-075M	0.75 [2.46]
CSUZAA-1M	1.0 [3.28]
CSUZAA-2M	2.0 [6.56]
CSUZAA-3M	3.0 [9.84]
CSUZAA-5M	5.0 [16.40]

RoHS Compliant

NOTES:

- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: 012 [305] = +1 [25] / -0 >12 [305] 060 [1524] = +2 [51] / -0 >60 [1524] 0120 [3048] = +4 [102] / -0 >120 [3048] 0300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = N .2 .XX = N .02 .XXX = N .005	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D. PARHAM	02/10/2009		
	CHECKED BY M. MARTINEZ	02/10/2009	CATEGORY USB	
	APPROVED BY S. SMITH	02/11/2009	PRODUCT DESCRIPTION CABLE, USB TYPE A/A, LSZH	
PROJECTION 	COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321
		SCALE: NONE	CAD FILE: CSUZAA.SLDDRW	REV. C
		DWG. NO. CSUZAA		SHEET 1 OF 1