


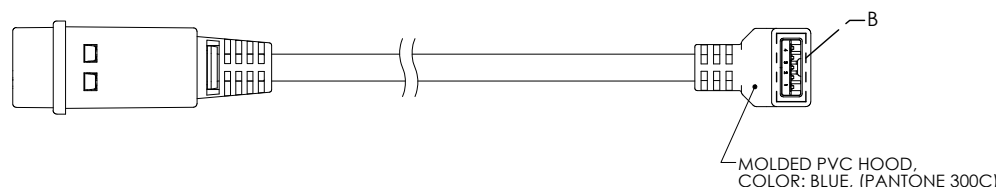




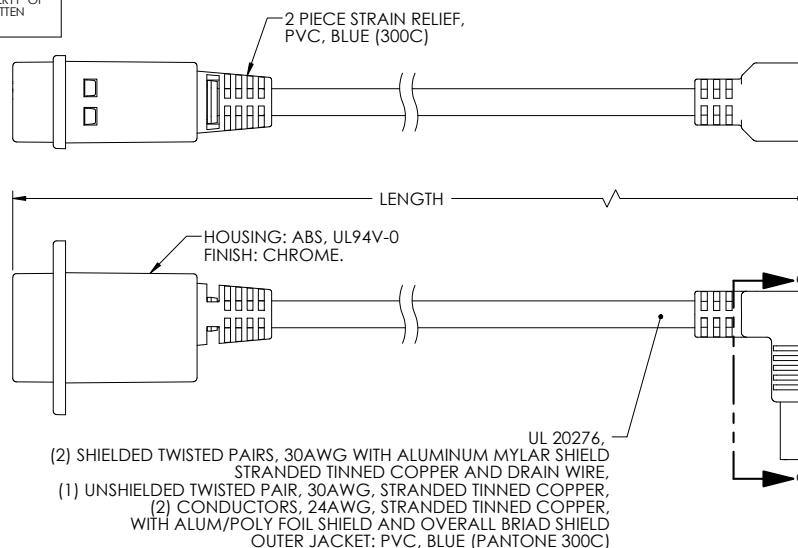


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	INITIAL RELEASE	07/11/17	JLABOY

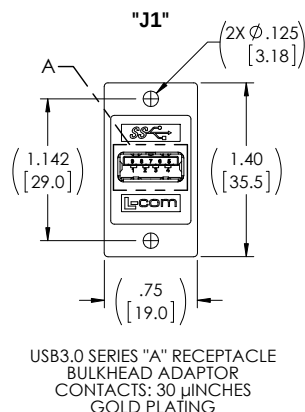

PART NUMBER	LENGTH	
	INCHES	MM
U3A00034-12I	12.0	[304.8]
U3A00034-24I	24.0	[609.6]
U3A00034-36I	36.0	[914.4]
U3A00034-50I	50.0	[1270.0]



NOTES:

1. OPERATING TEMPERATURE: -10°C TO +70°C
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES (mm)
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] ≤60 [1524] = +2(51) / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +4 [102] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
X = ±2 [5.08]
XX = ±12 [3.05]
XXX = ±.005 [0.13]

PROJECTION

APPROVALS

DRAWN BY S.L.I.	DATE 06/07/17
CHECKED BY B.ZHANG	DATE 06/07/17
APPROVED BY S.PAN	DATE 06/07/17

CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY
COLOR VARIATIONS
MAY OCCUR

 Global Connectivity		50 HIGH STREET NORTH ANDOVER, MA 01845	
CATEGORY		USB	
PRODUCT DESCRIPTION			
USB3.0 A-F PNL MNT/90DN A-M SHLD			
SIZE	FSCM NO.	DWG. NO.	REV.
B	43321	U3A00034	A
SCALE: NONE		CAD FILE: U3A00034.SLDRAW	SHEET 1 OF 1