
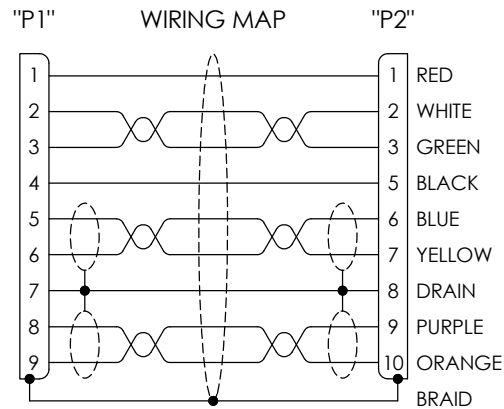


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 11/29/17 | J.LABOY |
| | | | |
| | | | |

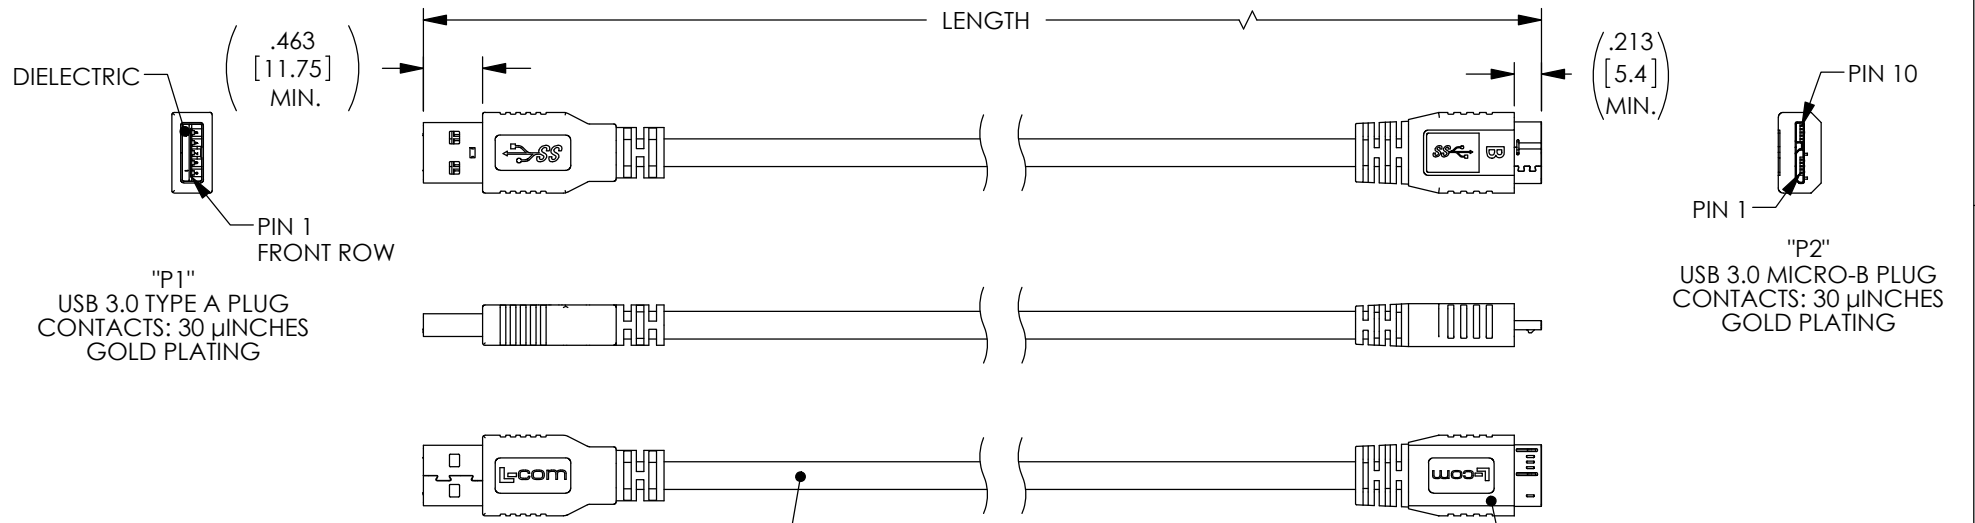

UL STYLE 20276,
 (2) TWISTED PAIR, 30AWG WITH
 ALUM/POLY FOIL SHIELD AND DRAIN WIRE,
 (1) UNSHIELDED TWISTED PAIR, 30AWG,
 (2) CONDUCTORS, 24AWG,
 OVERALL ALUMINUM/MYLAR AND BRAIDED SHIELD,
 JACKET: PVC, WHITE
 (NOM DIA. .217" [5.5])

| PART NUMBER | LENGTH METERS [FEET] |
|--------------|----------------------|
| U3A00061-05M | 0.5 [1.64] |

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
3. CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

| | | | |
|--|-----------------------|----------|---|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ± .005 [13] | APPROVALS | DATE | 50 HIGH STREET NORTH ANDOVER, MA 01845 |
| | DRAWN BY S.LI | 10/16/17 | |
| PROJECTION | CHECKED BY B.ZHANG | 10/16/17 | PRODUCT DESCRIPTION CA, USB 3.0 TYPE A/MICB WHITE |
| | APPROVED BY S.PAN | 10/16/17 | |