

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/9/11	D.GRIFFIN
B	ECN 5784: CHANGE BULK CABLE FROM UL1569 TO UL1007	10/18/11	D.FRISIELLO

D

C

B

A



D

C

B

A

2X, 4-40 UNC-2B
THREADED INSERT
(EMBEDDED)
PEM "STKB-440-4"
OR EQUIVALENT

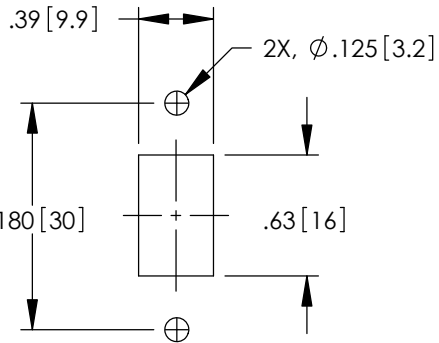

RECOMMENDED
PANEL CUTOUT



NOTES:



MATERIAL:
CONDUCTORS: UL1007, 24AWG STRANDED TINNED COPPER.
MOLDED HOOD: PVC, GRAY (PANTONE 424C)


FINISH:
USB CONTACT FINISH 30μ IN GOLD OVER 50μ IN NICKEL PLATE.

MISCELLANEOUS:
CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
INCLUDE MOUNTING HARDWARE 2X #4-40 X .38 LG. PHILLIPS PAN HD SCREW.
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE
WITH L-COM SPECIFICATION PS-0031.

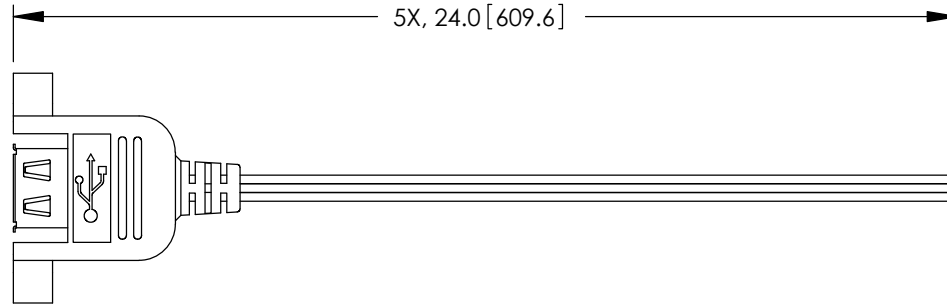

5X, CUT END

"J1" WIRING DIAGRAM

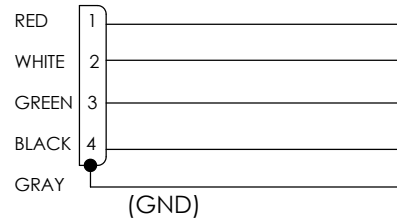

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005 PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	9/8/11		
	CHECKED BY C.BRAN	9/8/11	CATEGORY USB	
	APPROVED BY S.SMITH	9/8/11	PRODUCT DESCRIPTION CA USB-A PNL/WIRE LEADS	
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. UPMA-LEADS	REV. B
	SCALE: NONE		CAD FILE: UPMA-LEADS.SLDDRW	SHEET 1 OF 1