


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/30/15	D.GRIFFIN

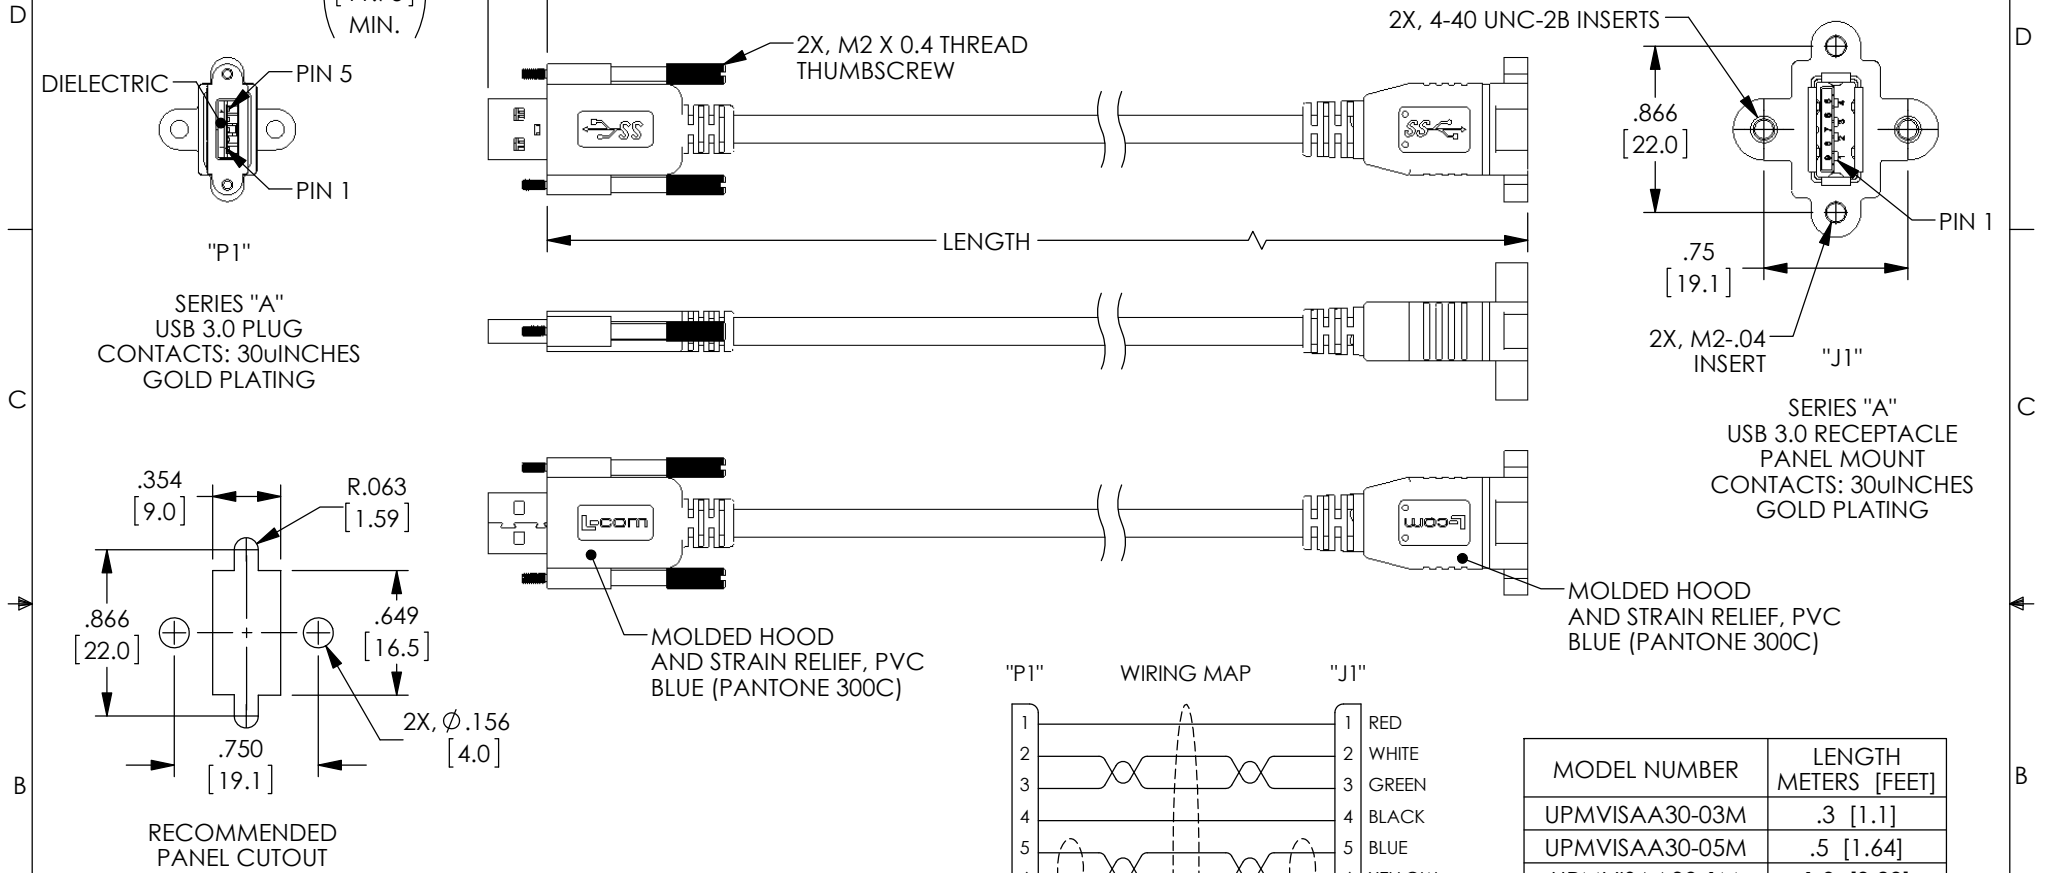

NOTES:

CABLE: UL STYLE 20276, (2X) TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. (1) UNSHIELDED TWISTED PAIR, 30AWG. (2) COND., 24AWG. OVERALL BRAID SHIELD
JACKET: PVC, BLUE (PANTONE 300C)

MISCELLANEOUS:

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

MODEL NUMBER	LENGTH METERS [FEET]
UPMVISAA30-03M	.3 [1.1]
UPMVISAA30-05M	.5 [1.64]
UPMVISAA30-1M	1.0 [3.28]
UPMVISAA30-2M	2.0 [6.56]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13] PROJECTION 	APPROVALS DRAWN BY D.FRISIELLO CHECKED BY D.CASTRO APPROVED BY S.SMITH	DATE 4/27/15 6/9/15 6/9/15	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 CATEGORY USB 3.0 VISION PRODUCT DESCRIPTION CA USB3.0 A/F PNL MNT
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	
	SIZE A	FSCM NO. 43321	
	SCALE: NONE	CAD FILE: UPMVISAA30.SLDDRW	

REV.
A

SHEET 1 OF 1