
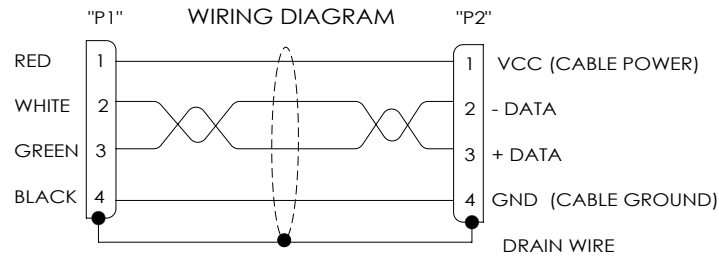


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/2/09	D.GRIFFIN
B	ECN 6237 :.463 MIN WAS .470 .UPDATED FORMAT&LOGO	09/24/12	D.FP
C	ECN 8763:MOLDED HOOD MATERIAL CHANGE TO PVC AND UPD NOTES	05/10/17	D.CUI

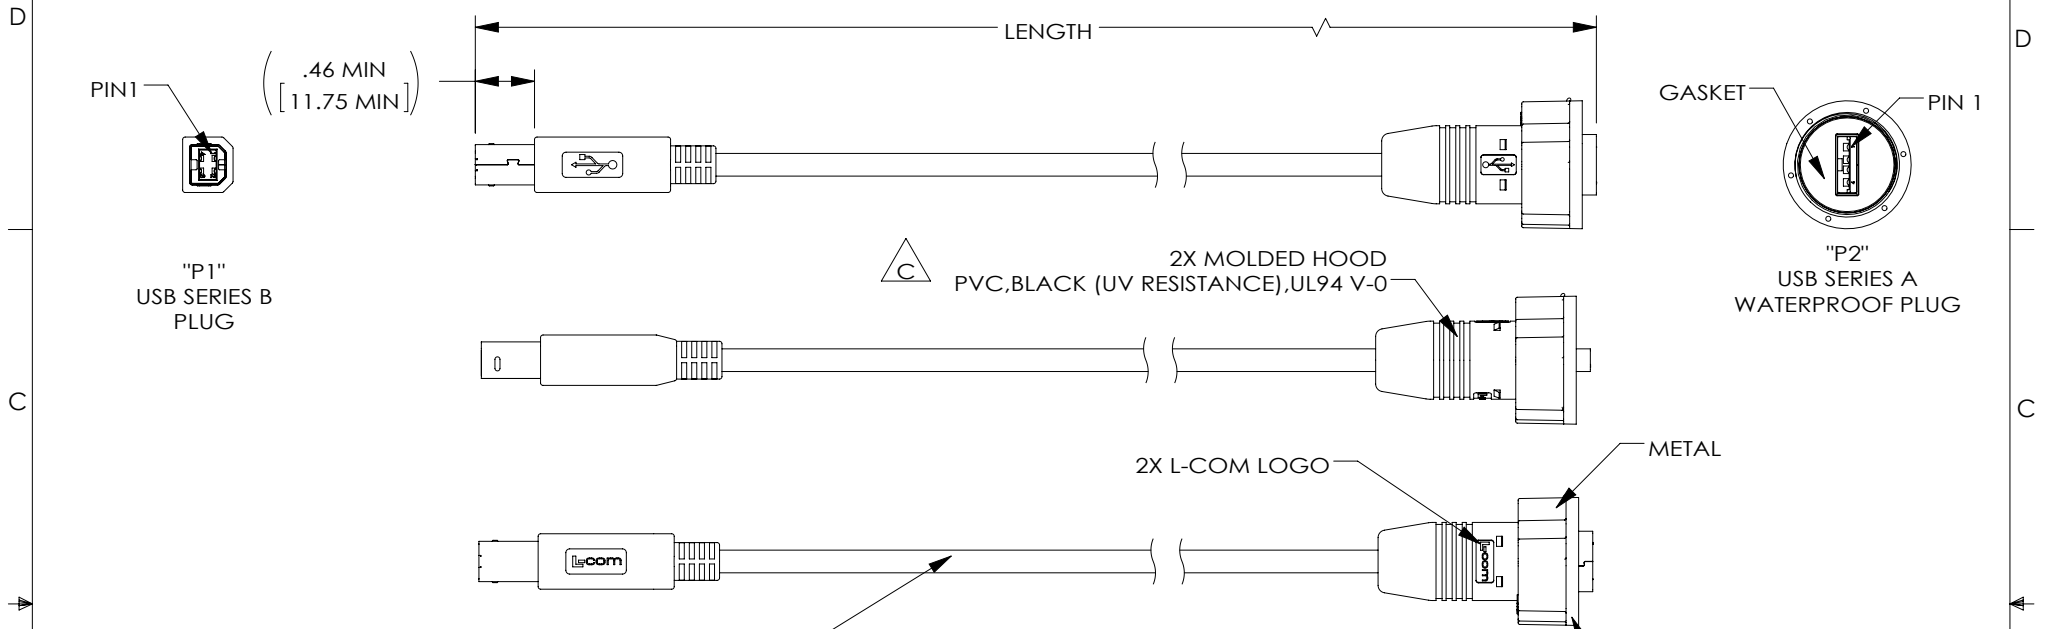

- NOTES:**
1. THESE CABLE ASSEMBLIES ARE CONSTRUCTED TO MEET THE REQUIREMENTS OF THE UNIVERSAL SERIAL BUS SPECIFICATION USB 2.0
 2. CONNECTOR CONTACTS HAVE 30 μINCHES GOLD PLATING OVER NICKEL PLATING
 3. THE CABLE SHIELD DRAIN WIRE IS CONNECTED TO THE METAL SHELL OF EACH PLUG
 4. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
 5. L-COM LOGO STYLE AND MOLDED HOOD APPEARANCE MAY VARY PER L-COM SPECIFICATION
 6. INGRESS PROTECTION RATING IS IP67 (P2 ONLY ,MATED)
 7. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031

REGULATORY COMPLIANCE:
CE2011/65/EU(ROHS DIRECTIVE)

PART NUMBER	LENGTH	
	METERS	FEET
WPUSBABSH-05M	0.5	1.64
WPUSBABSH-2M	2.0	6.56
WPUSBABSH-5M	5.0	16.41

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	APPROVALS DRAWN BY D.CASTRO CHECKED BY M.MARTINEZ APPROVED BY S.SMITH	DATE 03/10/10 03/10/10 03/10/10	50 HIGH STREET NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY USB	
	PROJECTION 		PRODUCT DESCRIPTION CA IP67 USB-A-M/B-M SHLD	
	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. WPUSBABSH

SCALE: NONE CAD FILE: WPUSBABSH.SLDDRW SHEET 1 OF 1