
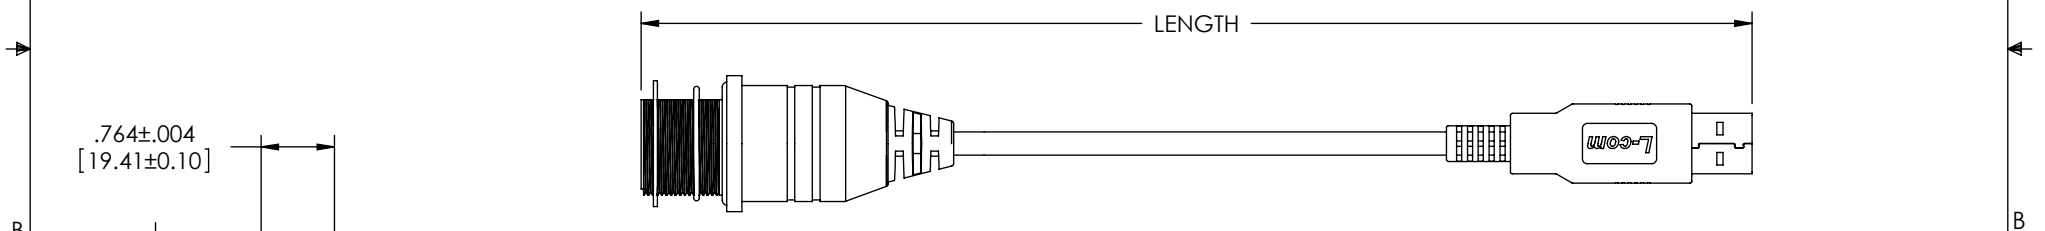



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/11/10	D.GRIFFIN

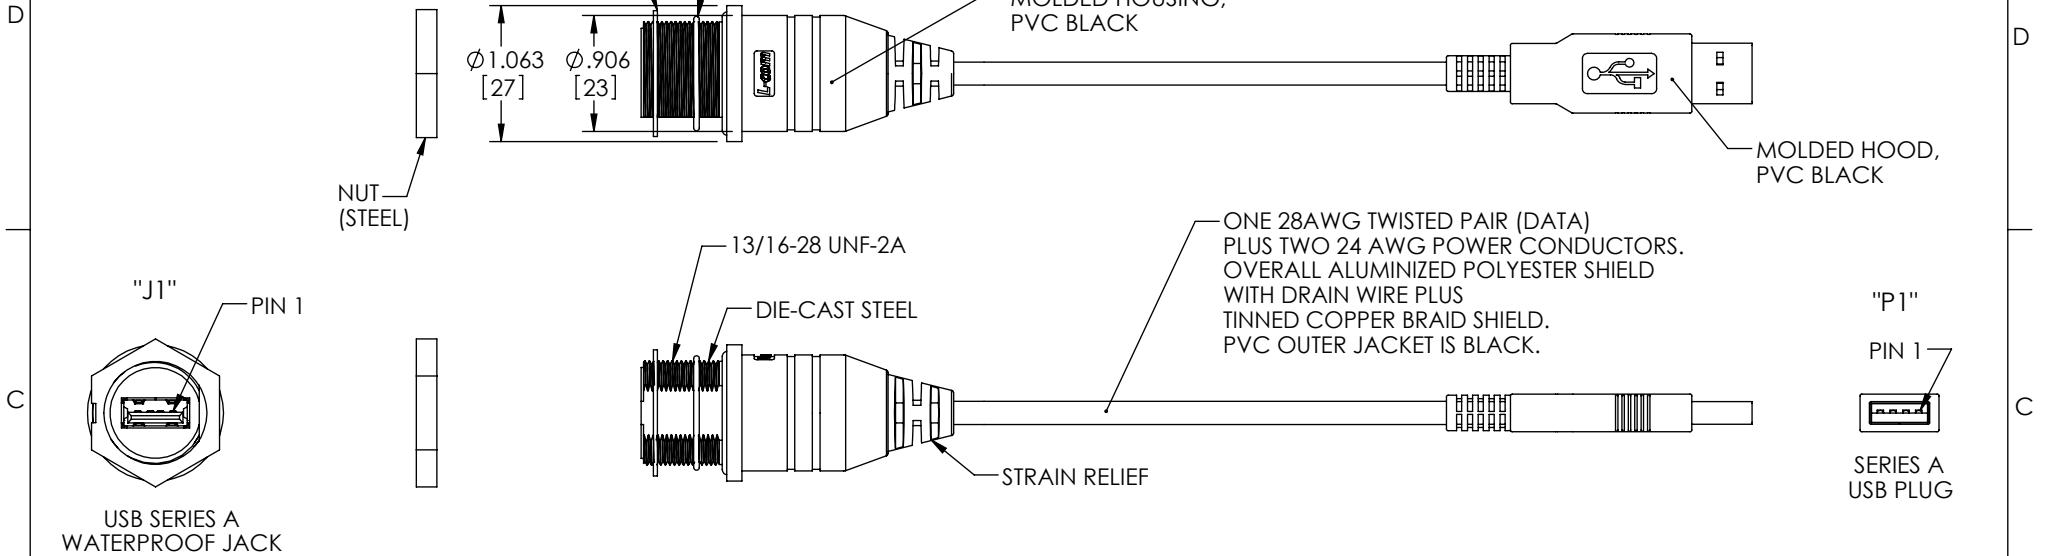

PART NUMBER	LENGTH	
	METERS	FEET
WPUSBAXSH-05M	0.5	1.64
WPUSBAXSH-1M	1.0	3.28
WPUSBAXSH-2M	2.0	6.56
WPUSBAXSH-3M	3.0	9.84
WPUSBAXSH-5M	5.0	16.40

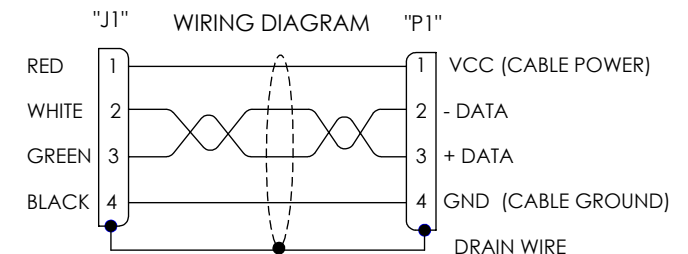

SPECIFICATIONS:

1. THESE CABLE ASSEMBLIES ARE CONSTRUCTED TO MEET THE REQUIREMENTS OF THE UNIVERSAL SERIES BUS SPECIFICATION USB 2.0.
2. CONNECTOR CONTACTS HAVE 30 MICROINCHES GOLD PLATING OVER NICKEL PLATING.
3. INGRESS PROTECTION RATING IS IP67.
4. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC. PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005 PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D. CASTRO	2/1/10		CATEGORY USB PRODUCT DESCRIPTION CA IP67 USB-A-F/A-M SHLD
	CHECKED BY D. PARHAM	2/1/10		
	APPROVED BY S. SMITH	2/1/10		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			
	COLOR VARIATIONS MAY OCCUR		SIZE A FSCM NO. 43321 DWG. NO. WPUSBAXSH REV. A	
	SCALE: NONE		CAD FILE: WPUSBAXSH.SLDDRW	
			SHEET 1 OF 1	