


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

| REVISIONS |                 |          |             |
|-----------|-----------------|----------|-------------|
| REV       | DESCRIPTION     | DATE     | CHANGED BY  |
| A         | INITIAL RELEASE | 11/12/07 | D.FRISIELLO |
|           |                 |          |             |
|           |                 |          |             |

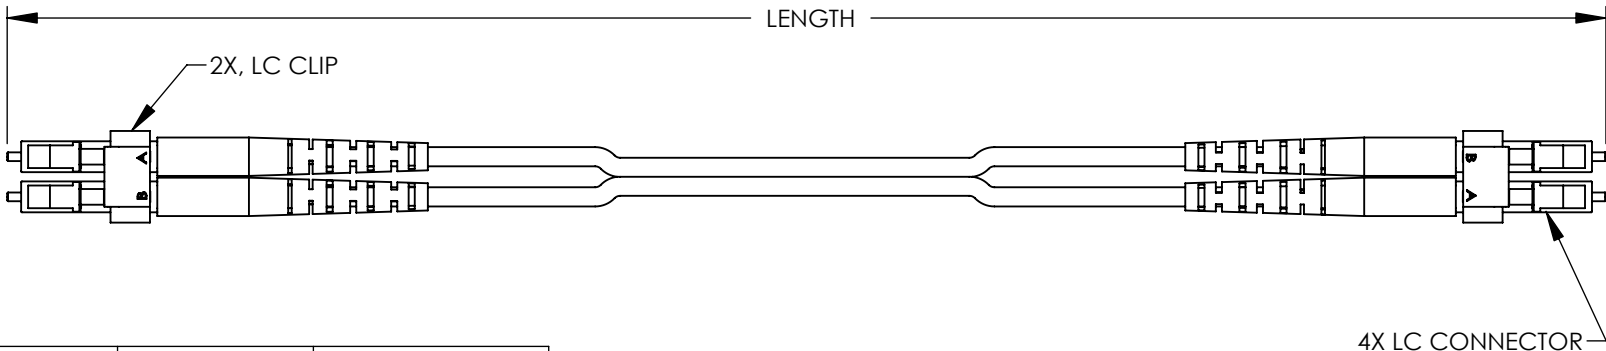

| MODEL NO.     | JACKET COLOR | LENGTH MTR [FT] |
|---------------|--------------|-----------------|
| FODLC50-RD-01 | RED          | 1 M [3.28 FT]   |
| FODLC50-RD-02 | RED          | 2 M [6.56 FT]   |
| FODLC50-RD-03 | RED          | 3 M [9.84 FT]   |
| FODLC50-RD-04 | RED          | 4 M [13.12 FT]  |
| FODLC50-RD-05 | RED          | 5 M [16.40 FT]  |
| FODLC50-RD-10 | RED          | 10 M [32.81 FT] |
| FODLC50-RD-15 | RED          | 15 M [49.22 FT] |
| FODLC50-GR-01 | GREEN        | 1 M [3.28 FT]   |
| FODLC50-GR-02 | GREEN        | 2 M [6.56 FT]   |
| FODLC50-GR-03 | GREEN        | 3 M [9.84 FT]   |
| FODLC50-GR-04 | GREEN        | 4 M [13.12 FT]  |
| FODLC50-GR-05 | GREEN        | 5 M [16.40 FT]  |
| FODLC50-GR-10 | GREEN        | 10 M [32.81 FT] |
| FODLC50-GR-15 | GREEN        | 15 M [49.22 FT] |
| FODLC50-BL-01 | BLUE         | 1 M [3.28 FT]   |
| FODLC50-BL-02 | BLUE         | 2 M [6.56 FT]   |
| FODLC50-BL-03 | BLUE         | 3 M [9.84 FT]   |
| FODLC50-BL-04 | BLUE         | 4 M [13.12 FT]  |
| FODLC50-BL-05 | BLUE         | 5 M [16.40 FT]  |
| FODLC50-BL-10 | BLUE         | 10 M [32.81 FT] |
| FODLC50-BL-15 | BLUE         | 15 M [49.22 FT] |
| FODLC50-YL-01 | YELLOW       | 1 M [3.28 FT]   |
| FODLC50-YL-02 | YELLOW       | 2 M [6.56 FT]   |
| FODLC50-YL-03 | YELLOW       | 3 M [9.84 FT]   |
| FODLC50-YL-04 | YELLOW       | 4 M [13.12 FT]  |
| FODLC50-YL-05 | YELLOW       | 5 M [16.40 FT]  |
| FODLC50-YL-10 | YELLOW       | 10 M [32.81 FT] |
| FODLC50-YL-15 | YELLOW       | 15 M [49.22 FT] |

NOTES:


CABLE CHARACTERISTICS:  
50/125 DUPLEX FIBER ZIPCORD.  
JACKET RATING: PVC, OFNR.  
JACKET COLOR: SEE CHART.  
CABLE O.D: 3.0 mm.

TESTING:  
DOUBLE ENDED INSERTION LOSS TEST. CABLES WITH GREATER THAN 1.0 dB OF LOSS ARE REJECTED.

CONNECTOR POLISH: THIS ASSEMBLY UTILIZES A PC POLISH.

MISCELLANEOUS:  
OPERATING TEMPERATURE: -20° C TO +70° C.  
CABLE ASSEMBLY TO SHIP WITH DUST CAPS INSTALLED. (NOT SHOWN)

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN INCHES [mm]  
TOLERANCES TO BE:  
.X ±.1 [.25] ANGLES ±2°  
.XX ±.01 [.25]  
.XXX ±.005 [.13]  
OVERALL CABLE LENGTH TOL:  
≤ 60 [1524] +3 [76.2] / - 0  
> 60 [1524] +5% / -0%



| APPROVALS               | DATE     |
|-------------------------|----------|
| DRAWN BY<br>D.FRISIELLO | 11/12/07 |
| CHECKED BY<br>D.PARHAM  | 11/12/07 |
| APPROVED BY<br>P.McNEIL | 11/12/07 |

CONFIGURATION DETAILS OF  
UNDIMENSIONED FEATURES  
MAY VARY

**L-com**  
CONNECTIVITY  
PRODUCTS

45 BEECHWOOD DRIVE  
NORTH ANDOVER, MA  
01845

CATEGORY

FIBER OPTICS

PRODUCT DESCRIPTION

50/125 LC-LC DPLX ASSEMBLY

SIZE  
**A**

FSCM NO.  
**43321**

DWG. NO.  
FODLC50-COLOR

REV.  
**A**

SCALE: NONE

CAD FILE: FODLC50-COLOR.SLDDRW

SHEET 1 OF 1