


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES FODSC50-01-OD1	10/8/14	D. CASTRO

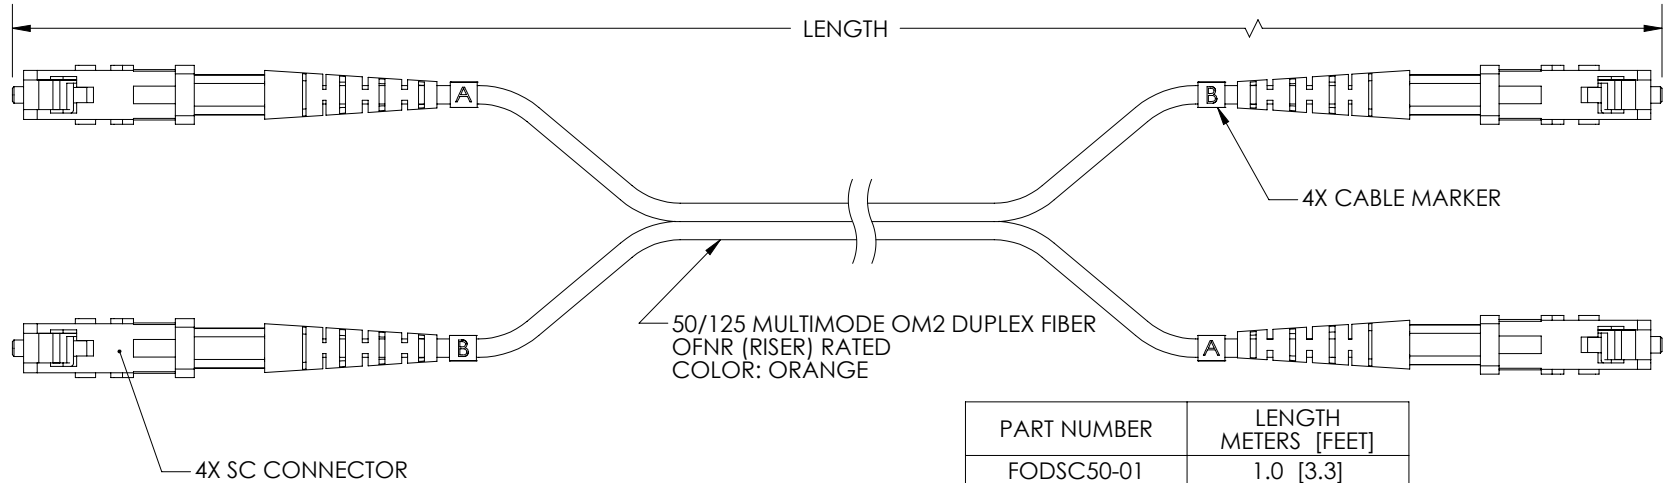

PART NUMBER	LENGTH METERS [FEET]
FODSC50-01	1.0 [3.3]
FODSC50-02	2.0 [6.6]
FODSC50-03	3.0 [9.8]
FODSC50-04	4.0 [13.1]
FODSC50-05	5.0 [16.4]
FODSC50-10	10.0 [32.8]
FODSC50-15	15.0 [49.2]
FODSC50-20	20.0 [65.6]
FODSC50-25	25.0 [82.0]
FODSC50-30	30.0 [98.4]
FODSC50-35	35.0 [114.8]
FODSC50-40	40.0 [131.2]
FODSC50-45	45.0 [147.6]
FODSC50-50	50.0 [164.0]
FODSC50-75	75.0 [246.1]
FODSC50-100	100.0 [328.1]
FODSC50-125	125.0 [410.1]
FODSC50-150	150.0 [492.1]

NOTES:


- SC CONNECTOR ASSEMBLY POLISH TYPE: PC
- ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
- PACKAGING:

LESS THAN 50 METERS (164 FT): INDIVIDUALLY PACKAGE EACH ASSEMBLY
IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

50 METERS (164 FT) OR MORE: TO BE SPOOLED

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY RON CARRICK	8/16/2000		
	CHECKED BY ENG	8/16/2000	CATEGORY FIBER OPTICS	
	APPROVED BY AFC	8/18/2000		
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION CA SC-SC 50/125 DUPLEX			
	COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321
			DWG. NO. FODSC50	REV. A
			SCALE: NONE	CAD FILE: FODSC50.SLDDRW



SHEET 1 OF 1