


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/12/07	D.FRISIELLO
B	ECN 7306: ADD COLOR ORANGE, SHEET 2, REVISE ROHS NOTE, FORMAT	2/21/14	D.FRISIELLO

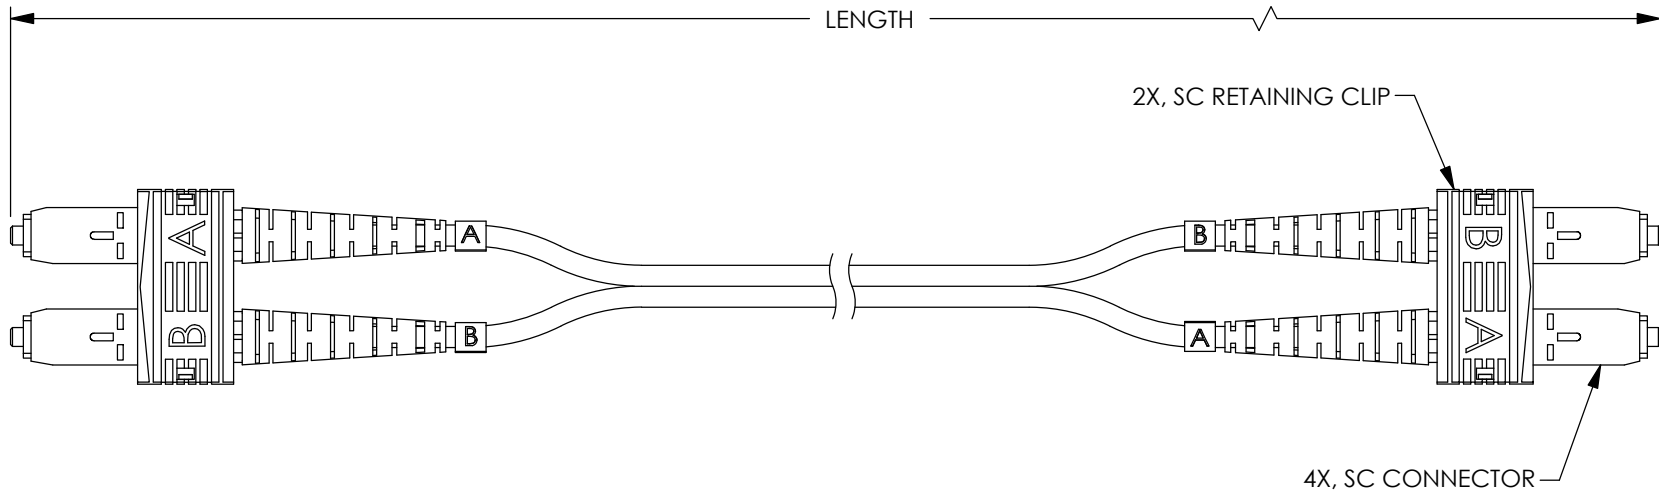

NOTES:

CABLE CHARACTERISTICS:

62.5/125 DUPLEX FIBER ZIPCORD
JACKET RATING: PVC, OFNR
JACKET COLOR: SEE CHART, SHEET 2 OF 2
CABLE O.D.: 3.0 mm

TESTING:

DOUBLE ENDED INSERTION LOSS TEST.
CABLES WITH GREATER THAN 1.0 dB OF LOSS ARE REJECTED.

CONNECTOR POLISH: THIS ASSEMBLY UTILIZES A PC POLISH.

MISCELLANEOUS:

OPERATING TEMPERATURE: -20° C TO +70° C.
CABLE ASSEMBLY TO BE PACKAGED WITH DUST CAPS INSTALLED. (NOT SHOWN).
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13] PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	11/12/07		
	CHECKED BY D.PARHAM	11/12/07	CATEGORY FIBER OPTICS	
	APPROVED BY P.McNEIL	11/12/07	PRODUCT DESCRIPTION 62.5/125 SC/SC DPLX ASSEMBLY	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. FODSC-COLOR
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: FODSC-COLOR.SLDDRW	REV. B
REF		SHEET 1 OF 2		

8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

MODEL NO.	JACKET COLOR	LENGTH METER [FT]
FODSC-RD-01	RED	1 [3.28]
FODSC-RD-02	RED	2 [6.56]
FODSC-RD-03	RED	3 [9.84]
FODSC-RD-04	RED	4 [13.12]
FODSC-RD-05	RED	5 [16.40]
FODSC-RD-10	RED	10 [32.81]
FODSC-RD-15	RED	15 [49.22]
FODSC-GR-01	GREEN	1 [3.28]
FODSC-GR-02	GREEN	2 [6.56]
FODSC-GR-03	GREEN	3 [9.84]
FODSC-GR-04	GREEN	4 [13.12]
FODSC-GR-05	GREEN	5 [16.40]
FODSC-GR-10	GREEN	10 [32.81]
FODSC-GR-15	GREEN	15 [49.22]
FODSC-BL-01	BLUE	1 [3.28]
FODSC-BL-02	BLUE	2 [6.56]
FODSC-BL-03	BLUE	3 [9.84]
FODSC-BL-04	BLUE	4 [13.12]
FODSC-BL-05	BLUE	5 [16.40]
FODSC-BL-10	BLUE	10 [32.81]
FODSC-BL-15	BLUE	15 [49.22]
FODSC-YL-01	YELLOW	1 [3.28]
FODSC-YL-02	YELLOW	2 [6.56]
FODSC-YL-03	YELLOW	3 [9.84]
FODSC-YL-04	YELLOW	4 [13.12]
FODSC-YL-05	YELLOW	5 [16.40]
FODSC-YL-10	YELLOW	10 [32.81]
FODSC-YL-15	YELLOW	15 [49.22]
FODSC-OR-01	ORANGE	1 [3.28]
FODSC-OR-02	ORANGE	2 [6.56]
FODSC-OR-03	ORANGE	3 [9.84]
FODSC-OR-04	ORANGE	4 [13.12]
FODSC-OR-05	ORANGE	5 [16.40]
FODSC-OR-10	ORANGE	10 [32.81]
FODSC-OR-15	ORANGE	15 [49.22]

△B

L-com Global Connectivity 45 BEECHWOOD DRIVE
NORTH ANDOVER, MA 01845

CATEGORY

FIBER OPTICS

PRODUCT DESCRIPTION

62.5/125 SC/SC DPLX ASSEMBLY

SIZE A	FSCM NO. 43321	DWG. NO. FODSC-COLOR	REV. B
------------------	--------------------------	-------------------------	------------------

SCALE: NONE	CAD FILE: FODSC-COLOR.SLDDRW	SHEET 2 OF 2
-------------	------------------------------	--------------