


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/5/10	D.GRIFFIN
B	ECN 6706: ADDED TABLE FOR NEW FIBER MODE P/N'S.	3/4/13	D. DESJARDIN
C	ECN 7106: ADDED JACKET TYPE TO CHART. CHANGED OM4 TO LSZH. UPD ROHS	10/16/13	D. DESJARDIN

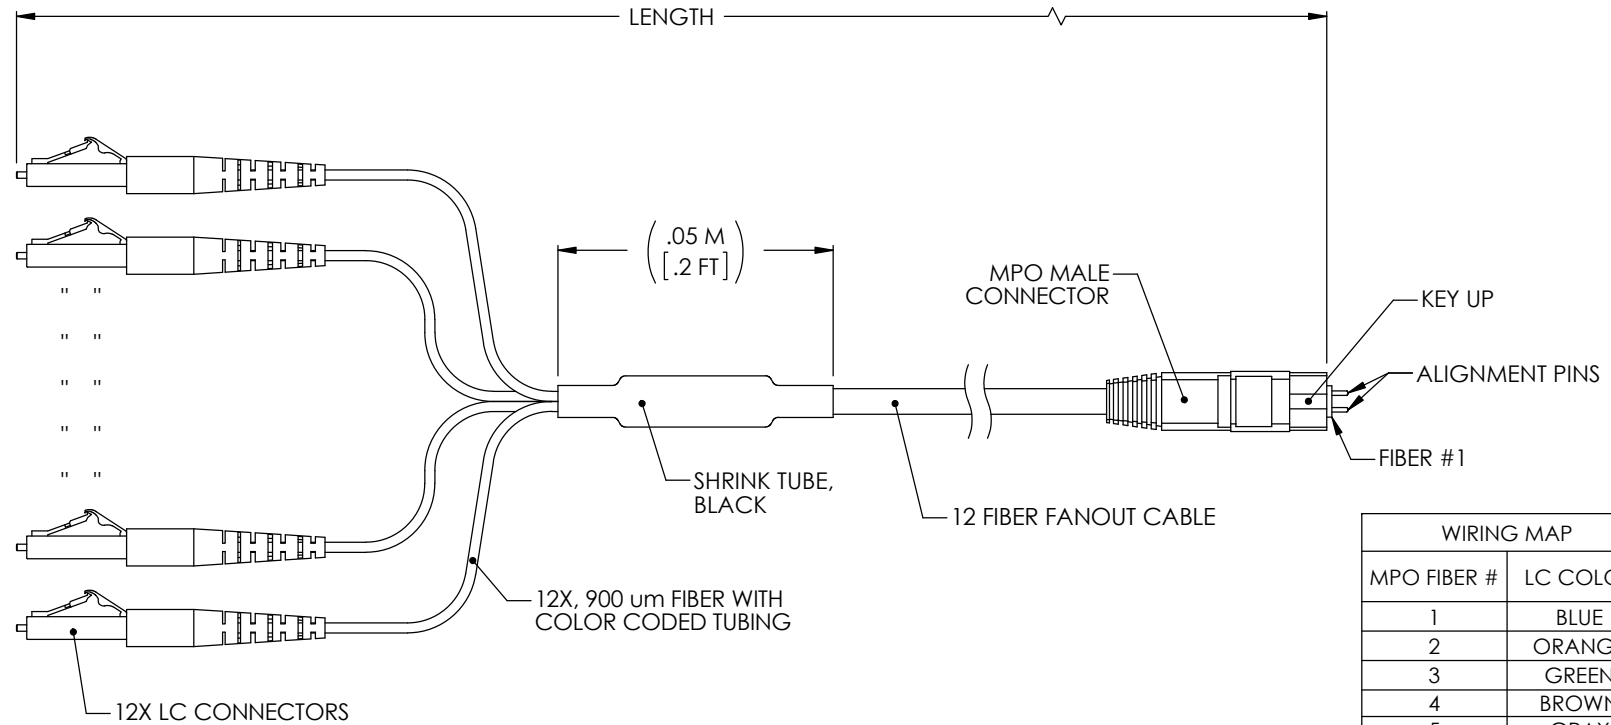

NOTES:


1. SEE SHEET 2 FOR PART NUMBERS, FIBER MODES, JACKET TYPES, COLORS, AND LENGTHS.

2. MPO CONNECTOR MULTIMODE ASSEMBLY POLISH TYPE: UPC
MPO CONNECTOR SINGLE MODE ASSEMBLY POLISH TYPE: APC
LC CONNECTOR ASSEMBLY POLISH TYPE: PC

3. ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).

4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [13]	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	DRAWN BY D. PARHAM	09/29/2010				
	CHECKED BY D. CASTRO	09/29/2010	CATEGORY	FIBER OPTICS		
	APPROVED BY S. SMITH	10/04/2010	PRODUCT DESCRIPTION		12 RBN FNOUT CBL,MTP(M)/LC	
PROJECTION 	COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321	DWG. NO. MTPM12-LC	REV. C
			SCALE: NONE		CAD FILE: MTPM12-LC.SLDDRW	SHEET 1 OF 2

8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



PART NUMBER	FIBER MODE	JACKET TYPE	COLOR	METERS [FEET]
MTPM12-LC-01	62.5/125 MULTIMODE OM1	OFNR (RISER) RATED	ORANGE	1.0 [3.28]
MTPM12-LC-05	62.5/125 MULTIMODE OM1	OFNR (RISER) RATED	ORANGE	5.0 [16.40]
MTPM12-LC-10	62.5/125 MULTIMODE OM1	OFNR (RISER) RATED	ORANGE	10.0 [32.81]
MPM12OM2-LC-05	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	0.5 [1.64]
MPM12OM2-LC-1	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	1.0 [3.28]
MPM12OM2-LC-5	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	5.0 [16.40]
MPM12OM2-LC-10	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	10.0 [32.81]
MPM12OM3-LC-05	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	0.5 [1.64]
MPM12OM3-LC-1	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	1.0 [3.28]
MPM12OM3-LC-5	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	5.0 [16.40]
MPM12OM3-LC-10	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	10.0 [32.81]
MPM12OM4-LC-05	50/125 MULTIMODE OM4	LOW SMOKE ZERO HALOGEN	AQUA	0.5 [1.64]
MPM12OM4-LC-1	50/125 MULTIMODE OM4	LOW SMOKE ZERO HALOGEN	AQUA	1.0 [3.28]
MPM12OM4-LC-5	50/125 MULTIMODE OM4	LOW SMOKE ZERO HALOGEN	AQUA	5.0 [16.40]
MPM12OM4-LC-10	50/125 MULTIMODE OM4	LOW SMOKE ZERO HALOGEN	AQUA	10.0 [32.81]
MPM12S-LC-05	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	0.5 [1.64]
MPM12S-LC-1	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	1.0 [3.28]
MPM12S-LC-5	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	5.0 [16.40]
MPM12S-LC-10	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	10.0 [32.81]

L-com Global Connectivity 45 BEECHWOOD DRIVE
NORTH ANDOVER, MA 01845

CATEGORY

FIBER OPTICS

PRODUCT DESCRIPTION

12 RBN FNOUT CBL,MTP(M)/LC

SIZE A	FSCM NO. 43321	DWG. NO. MTPM12-LC	REV. C
------------------	--------------------------	-----------------------	------------------

SCALE: NONE	CAD FILE: MTPM12-LC.SLDDRW	SHEET 2 OF 2
-------------	----------------------------	--------------