


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
G	ECN 6706: ADDED TABLE FOR NEW FIBER MODE P/N'S. UPDATED FORMAT	3/4/13	D. DESJARDIN
H	ECN 7107: ADDED JACKET TYPE TO CHART. CHANGED OM4 TO LSZH. UPD ROHS	10/17/13	D. FRISIello

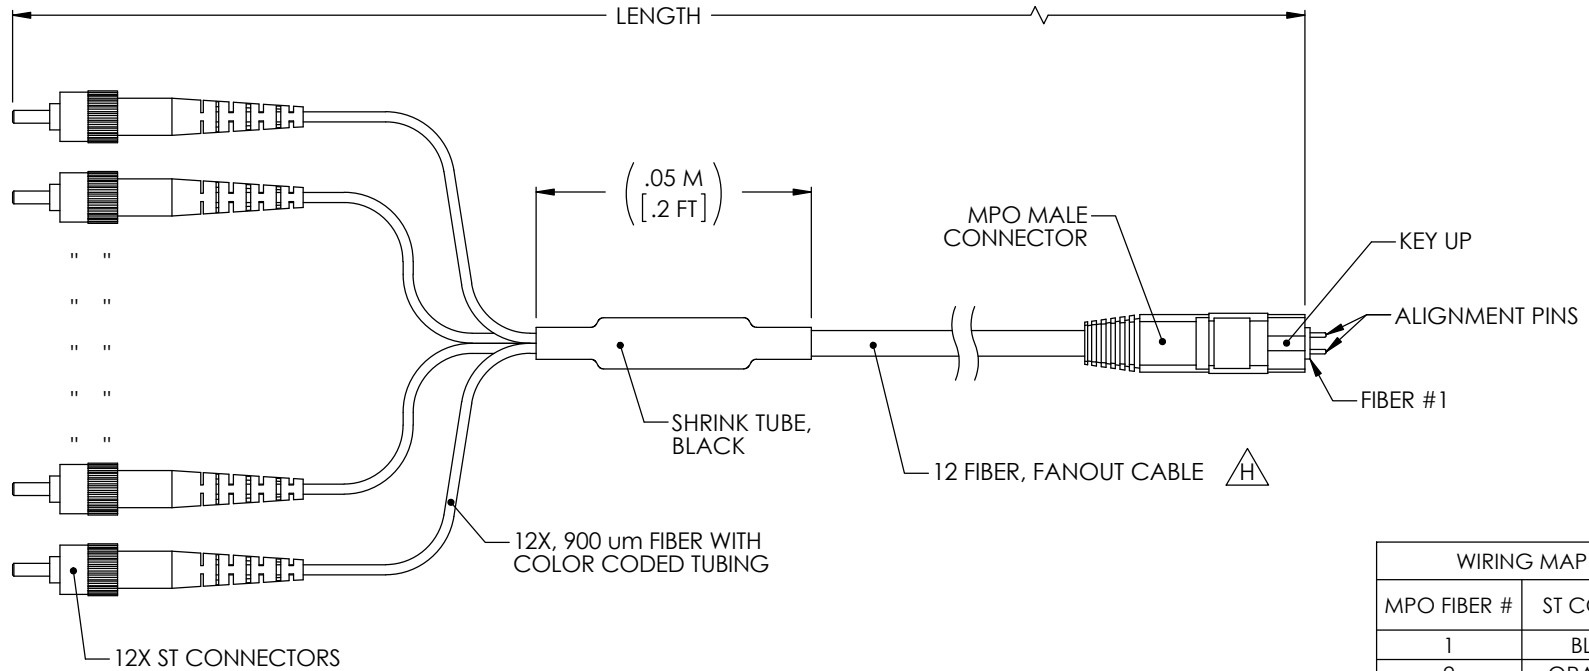

WIRING MAP	
MPO FIBER #	ST COLOR
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	GRAY
6	WHITE
7	RED
8	BLACK
9	YELLOW
10	PURPLE
11	ROSE
12	AQUA

NOTES:

- SEE SHEET 2 FOR PART NUMBERS, FIBER MODES, JACKET TYPES, COLORS, AND LENGTHS.
- MPO CONNECTOR MULTIMODE ASSEMBLY POLISH TYPE: UPC
MPO CONNECTOR SINGLE MODE ASSEMBLY POLISH TYPE: APC
ST CONNECTOR ASSEMBLY POLISH TYPE: PC
- ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13] PROJECTION 	APPROVALS DRAWN BY C.MCCORMICK CHECKED BY D.PARHAM APPROVED BY R.CARRICK	DATE 04/08/2002 04/08/2002 04/08/2002	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 CATEGORY FIBER OPTICS PRODUCT DESCRIPTION 12 RBN FNOUT CBL,MTP(M)/ST
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	
	SIZE A	FSCM NO. 43321	
	SCALE: NONE	CAD FILE: MTPM12-ST.SLDDRW	
DWG. NO. MTPM12-ST		REV. H	SHEET 1 OF 2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC., ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



PART NUMBER	FIBER MODE	JACKET TYPE	COLOR	METERS [FEET]
MTPM12-ST-01	62.5/125 MULTIMODE OM1	OFNR (RISER) RATED	ORANGE	1.0 [3.28]
MTPM12-ST-05	62.5/125 MULTIMODE OM1	OFNR (RISER) RATED	ORANGE	5.0 [16.40]
MTPM12-ST-10	62.5/125 MULTIMODE OM1	OFNR (RISER) RATED	ORANGE	10.0 [32.81]
MPM12OM2-ST-05	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	0.5 [1.64]
MPM12OM2-ST-1	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	1.0 [3.28]
MPM12OM2-ST-5	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	5.0 [16.40]
MPM12OM2-ST-10	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE	10.0 [32.81]
MPM12OM3-ST-05	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	0.5 [1.64]
MPM12OM3-ST-1	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	1.0 [3.28]
MPM12OM3-ST-5	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	5.0 [16.40]
MPM12OM3-ST-10	50/125 MULTIMODE OM3	OFNR (RISER) RATED	AQUA	10.0 [32.81]
MPM12OM4-ST-05	50/125 MULTIMODE OM4	LOW SMOKE ZERO HALOGEN	AQUA	0.5 [1.64]
MPM12OM4-ST-1	50/125 MULTIMODE OM4	LOW SMOKE ZERO HALOGEN	AQUA	1.0 [3.28]
MPM12OM4-ST-5	50/125 MULTIMODE OM4	LOW SMOKE ZERO HALOGEN	AQUA	5.0 [16.40]
MPM12OM4-ST-10	50/125 MULTIMODE OM4	LOW SMOKE ZERO HALOGEN	AQUA	10.0 [32.81]
MPM12S-ST-05	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	0.5 [1.64]
MPM12S-ST-1	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	1.0 [3.28]
MPM12S-ST-5	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	5.0 [16.40]
MPM12S-ST-10	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW	10.0 [32.81]

		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY FIBER OPTICS			
PRODUCT DESCRIPTION 12 RBN FNOUT CBL,MTP(M)/ST			
SIZE A	FSCM NO. 43321	DWG. NO. MTPM12-ST	REV. H
SCALE: NONE		CAD FILE: MTPM12-ST.SLDDRW	SHEET 2 OF 2