


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6706: ADDED TABLE FOR NEW FIBER MODE P/N'S. ADDED SM WIRE MAP.	3/4/13	D.DESJARDIN
F	ECN 7107: ADDED JACKET TYPE TO CHART. REMOVED ALL OM4 P/N'S. UPD ROHS	10/17/13	D.FRISIELLO
G	ECN 9116: REVISE CHART SHEET 2	3/23/18	D.FRISIELLO

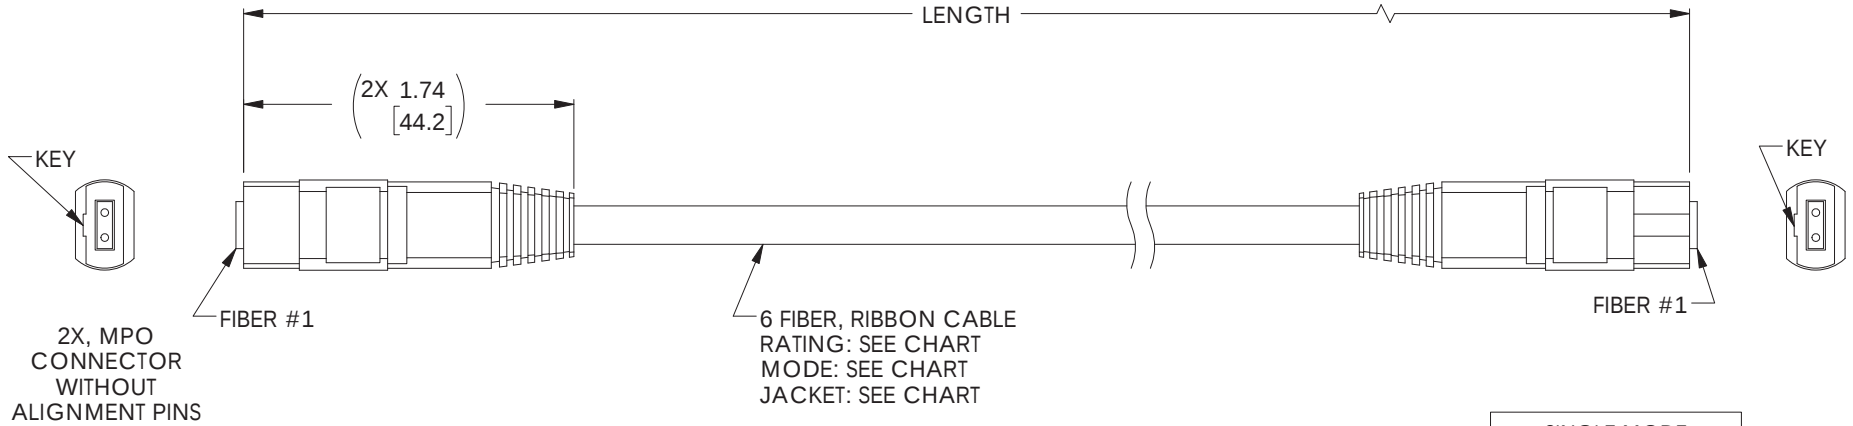


MULTIMODE WIRING MAP (8 MPO CONNECTOR)	
N/C	N/C
2	2
3	3
4	4
5	5
6	6
7	7
N/C	N/C

SINGLE MODE WIRING MAP (12 MPO CONNECTOR)	
N/C	N/C
N/C	N/C
N/C	N/C
4	4
5	5
6	6
7	7
8	8
9	9
N/C	N/C
N/C	N/C
N/C	N/C

NOTES:

- SEE SHEET 2 FOR PART NUMBERS, FIBER MODES, JACKET TYPES, COLORS, AND LENGTHS.
- MPO CONNECTOR MULTIMODE ASSEMBLY POLISH TYPE: UPC
MPO CONNECTOR SINGLE MODE ASSEMBLY POLISH TYPE: APC
- ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13]	APPROVALS	DATE	50 HIGH STREET NORTH ANDOVER, MA 01845			
	DRAWN BY C.MCCORMICK	04/15/2002				
	CHECKED BY D.PARHAM	04/15/2002	CATEGORY	FIBER OPTICS		
	APPROVED BY R.CARRICK	04/15/2002	PRODUCT DESCRIPTION			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		6 FIBER RIBBON CBL,MTP(F)			
PROJECTION 	COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321	DWG. NO. MTPF06	REV. G
			SCALE: NONE	CAD FILE: MTPF06.SLDDRW	SHEET 1 OF 2	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



PART NUMBER	METERS [FEET]	FIBER MODE	JACKET TYPE	COLOR
MTPF06-1	1.0 [3.28]	62.5/125 MULTIMODE OM1	OFNR (RISER) RATED	ORANGE
MTPF06-3	3.0 [9.84]			
MTPF06-5	5.0 [16.41]			
MTPF06-10	10.0 [32.81]			
MTPF06-25	25.0 [82.03]			
MTPF06-50	50.0 [164.05]			
MTPF06-100	100.0 [328.10]			
MPFF6OM2-1	1.0 [3.28]	50/125 MULTIMODE OM2	OFNR (RISER) RATED	ORANGE
MPFF6OM2-3	3.0 [9.84]			
MPFF6OM2-5	5.0 [16.41]			
MPFF6OM2-10	10.0 [32.81]			
MPFF6OM2-25	25.0 [82.03]			
MPFF6OM2-50	50.0 [164.05]			
MPFF6OM2-100	100.0 [328.10]			
MPFF6OM3-1	1.0 [3.28]	50/125 MULTIMODE OM3 LASER OPTIMIZED	OFNR (RISER) RATED	AQUA
MPFF6OM3-3	3.0 [9.84]			
MPFF6OM3-5	5.0 [15.41]			
MPFF6OM3-10	10.0 [32.81]			
MPFF6OM3-25	25.0 [82.03]			
MPFF6OM3-50	50.0 [164.05]			
MPFF6OM3-100	100.0 [328.10]			
MPFF6S-1	1.0 [3.28]	9/125 SINGLE MODE OS1	OFNR (RISER) RATED	YELLOW
MPFF6S-3	3.0 [9.84]			
MPFF6S-5	5.0 [16.41]			
MPFF6S-10	10.0 [32.81]			
MPFF6S-25	25.0 [82.03]			
MPFF6S-50	50.0 [164.05]			
MPFF6S-100	100.0 [328.10]			



50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY

FIBER OPTICS

PRODUCT DESCRIPTION

6 FIBER RIBBON CBL,MTP(F)

SIZE A	FSCM NO. 43321	DWG. NO. MTPF06	REV. G
SCALE: NONE		CAD FILE: MTPF06.SLDDRW	
		SHEET 2 OF 2	