


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/12/07	D.FRISIELLO
B	ECN 7306: ADD COLOR ORANGE, SHEET 2, REVISE ROHS NOTE, FORMAT	2/24/14	D.FRISIELLO

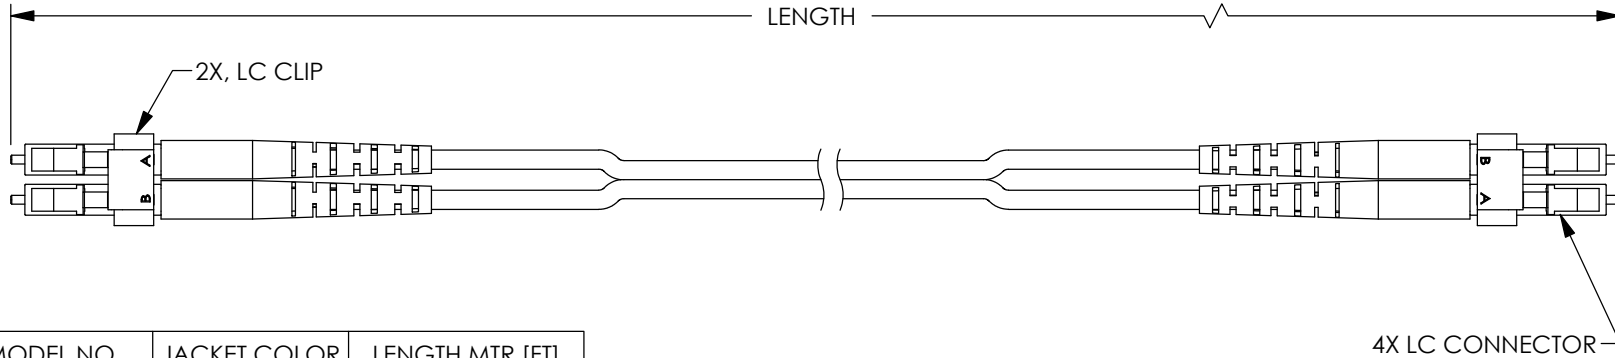

MODEL NO.	JACKET COLOR	LENGTH MTR [FT]
SFODLC-RD-01	RED	1 M [3.28 FT]
SFODLC-RD-02	RED	2 M [6.56 FT]
SFODLC-RD-03	RED	3 M [9.84 FT]
SFODLC-RD-04	RED	4 M [13.12 FT]
SFODLC-RD-05	RED	5 M [16.40 FT]
SFODLC-RD-10	RED	10 M [32.81 FT]
SFODLC-RD-15	RED	15 M [49.22 FT]
SFODLC-GR-01	GREEN	1 M [3.28 FT]
SFODLC-GR-02	GREEN	2 M [6.56 FT]
SFODLC-GR-03	GREEN	3 M [9.84 FT]
SFODLC-GR-04	GREEN	4 M [13.12 FT]
SFODLC-GR-05	GREEN	5 M [16.40 FT]
SFODLC-GR-10	GREEN	10 M [32.81 FT]
SFODLC-GR-15	GREEN	15 M [49.22 FT]
SFODLC-BL-01	BLUE	1 M [3.28 FT]
SFODLC-BL-02	BLUE	2 M [6.56 FT]
SFODLC-BL-03	BLUE	3 M [9.84 FT]
SFODLC-BL-04	BLUE	4 M [13.12 FT]
SFODLC-BL-05	BLUE	5 M [16.40 FT]
SFODLC-BL-10	BLUE	10 M [32.81 FT]
SFODLC-BL-15	BLUE	15 M [49.22 FT]
SFODLC-OR-01	ORANGE	1 M [3.28 FT]
SFODLC-OR-02	ORANGE	2 M [6.56 FT]
SFODLC-OR-03	ORANGE	3 M [9.84 FT]
SFODLC-OR-04	ORANGE	4 M [13.12 FT]
SFODLC-OR-05	ORANGE	5 M [16.40 FT]
SFODLC-OR-10	ORANGE	10 M [32.81 FT]
SFODLC-OR-15	ORANGE	15 M [49.22 FT]

NOTES:

CABLE CHARACTERISTICS:

9/125 SINGLE MODE DUPLEX FIBER ZIPCORDER.
JACKET RATING: PVC, OFNR.
JACKET COLOR: SEE CHART.
CABLE O.D: 3.0 mm.

TESTING:

BACK REFLECTION TESTED AT 1310 nm WITH A < -40dB RESULT.

CONNECTOR POLISH: THIS ASSEMBLY UTILIZES A PC POLISH.

MISCELLANEOUS:

OPERATING TEMPERATURE: -20° C TO +70° C.
CABLE ASSEMBLY TO SHIP WITH DUST CAPS INSTALLED. (NOT SHOWN).
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ± .2 [5.08] XX = ± .02 [1.27] XXX = ± .005 [0.127] PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	11/12/07		
	CHECKED BY D.PARHAM	11/12/07	CATEGORY FIBER OPTICS	
	APPROVED BY P.McNEIL	11/12/07	PRODUCT DESCRIPTION LC-LC DPLX ASSEMBLY	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. SFODLC-COLOR
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: SFODLC-COLOR.SLDDRW	REV. B
REF		SHEET 1 OF 1		