

**Features:**

- 617-960 / 1430-7125 MHz
- Gain 0.9 / 3.8 dBi
- Efficiency 58 / 70 %
- Length 223mm (straight)
- IP 65
- Connector SMA Male

Applications:

- 5G FR1
- 2G/3G/4G compatible
- WiFi 6E 7GHz supported
- Access points
- Routers, Gateways
- IoT, Nb-IoT, LTE CAT-M1

All dimensions are in mm / inches

Issue: 2047

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Co, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998

Preliminary



ELECTRICAL SPECIFICATIONS

Frequency	617-960/1430-7125MHz
Nominal Impedance	50 Ω
Return Loss	<-6
Radiation Pattern	Omni
Gain(617-960MHz)	0.9dBi+/-1dB
Gain(1430-7125MHz)	3.8dBi+/-2dB
Efficiency (617-960MHz)	58%
Efficiency (1430-7125MHz)	70%
Polarization	Vertical
Power Withstanding	3W


MECHANICAL SPECIFICATIONS

Plastic radome	ABS/PC
Color	Black
Connector type	SMA Male
Flammability	UL94-V0
Ingress Protection	IP65
Weight	56.8 g
Overall Length	223.24[8.79] mm [INCHES]
Position	0°, 45° & 90°

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range	-40/+85 °C
Non-operating temperature range	-40/+85 °C
Temperature Shock	3 CYCLES, -25°C TO +70°C AT 5°PER MIN
Humidity	Mil-Std-810 Method 507.3, Procedure III 5 cycles @ 95% RH
Vibration	5-500 Hz FREQ, MIL STD 810 G section 514.4
Mechanical Shocks	4.78 m/s
Drop test	1 meter, 10 times to tile

MECHANICAL DRAWING

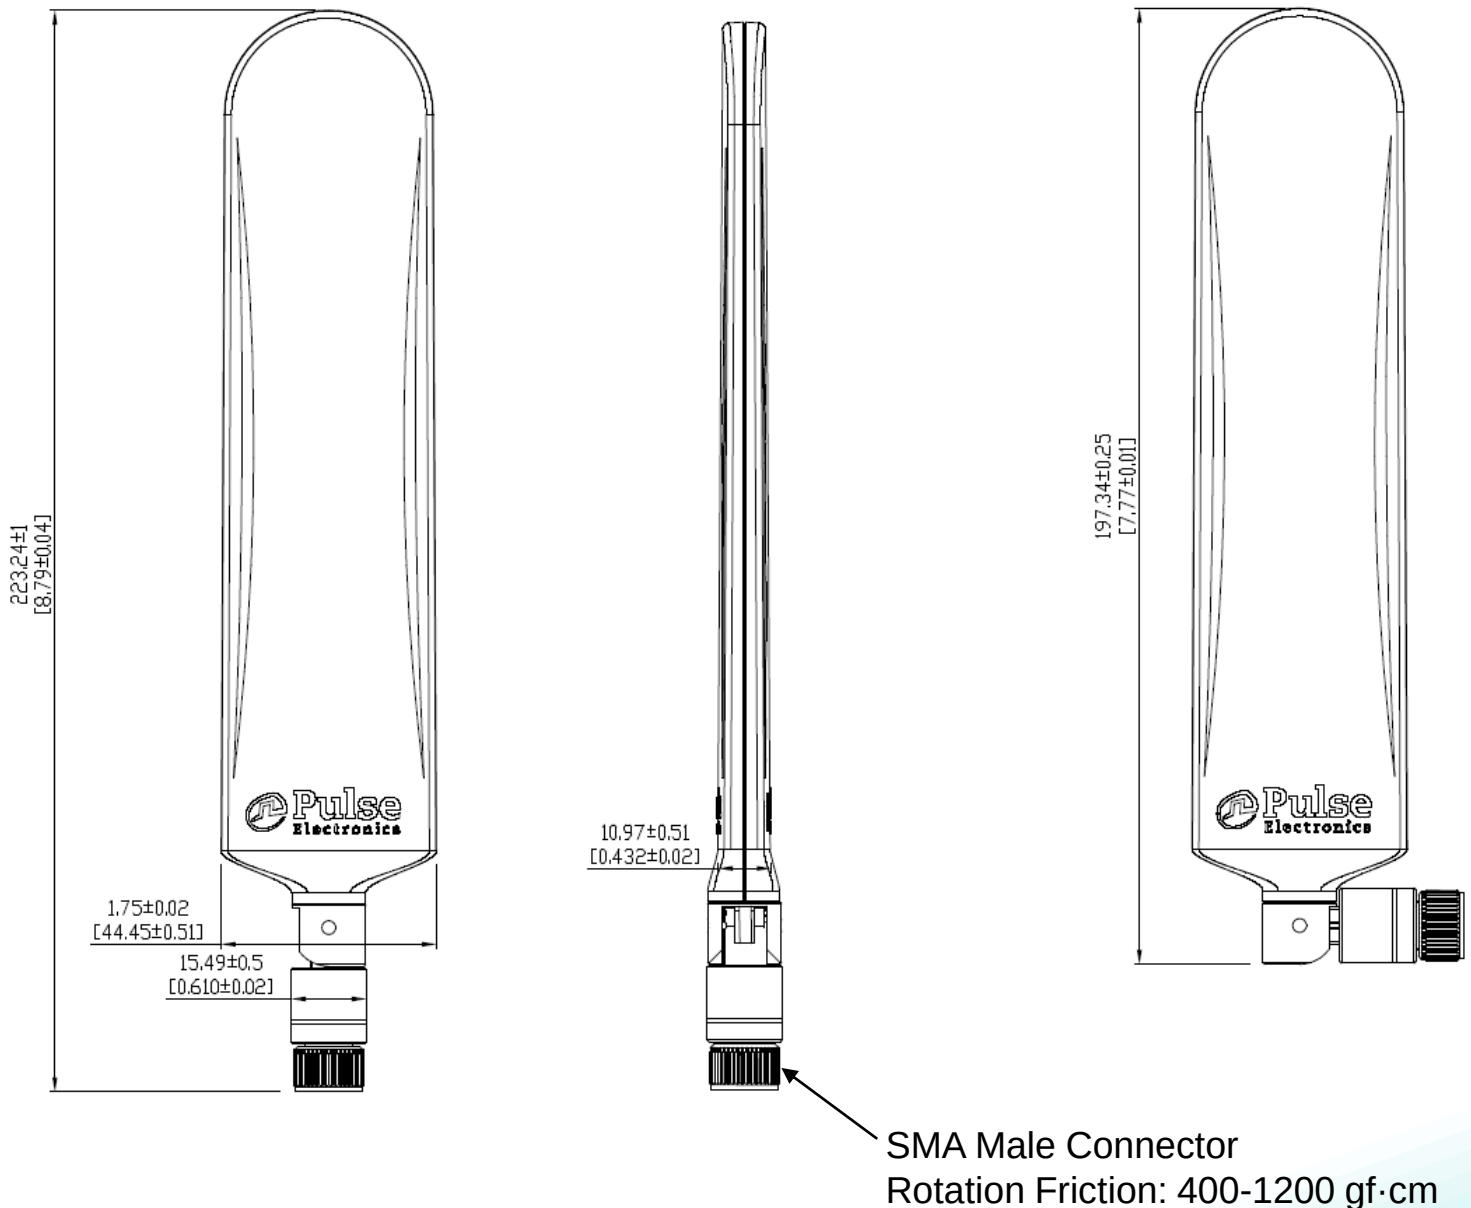


Issue: 2047

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Preliminary

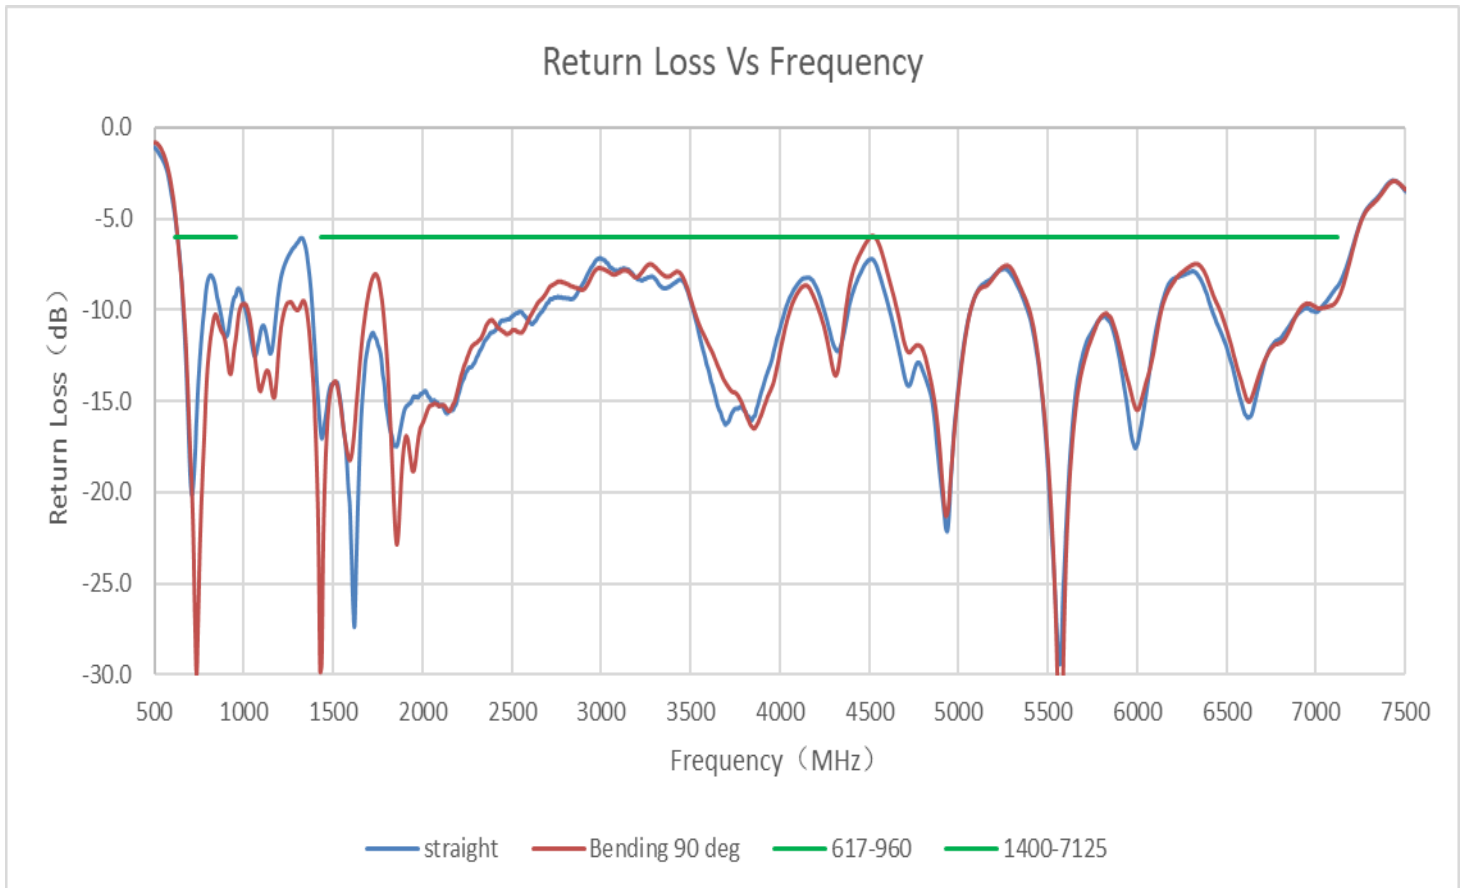TEST SETUP

TEST SETUP

Efficiency Vs Frequency

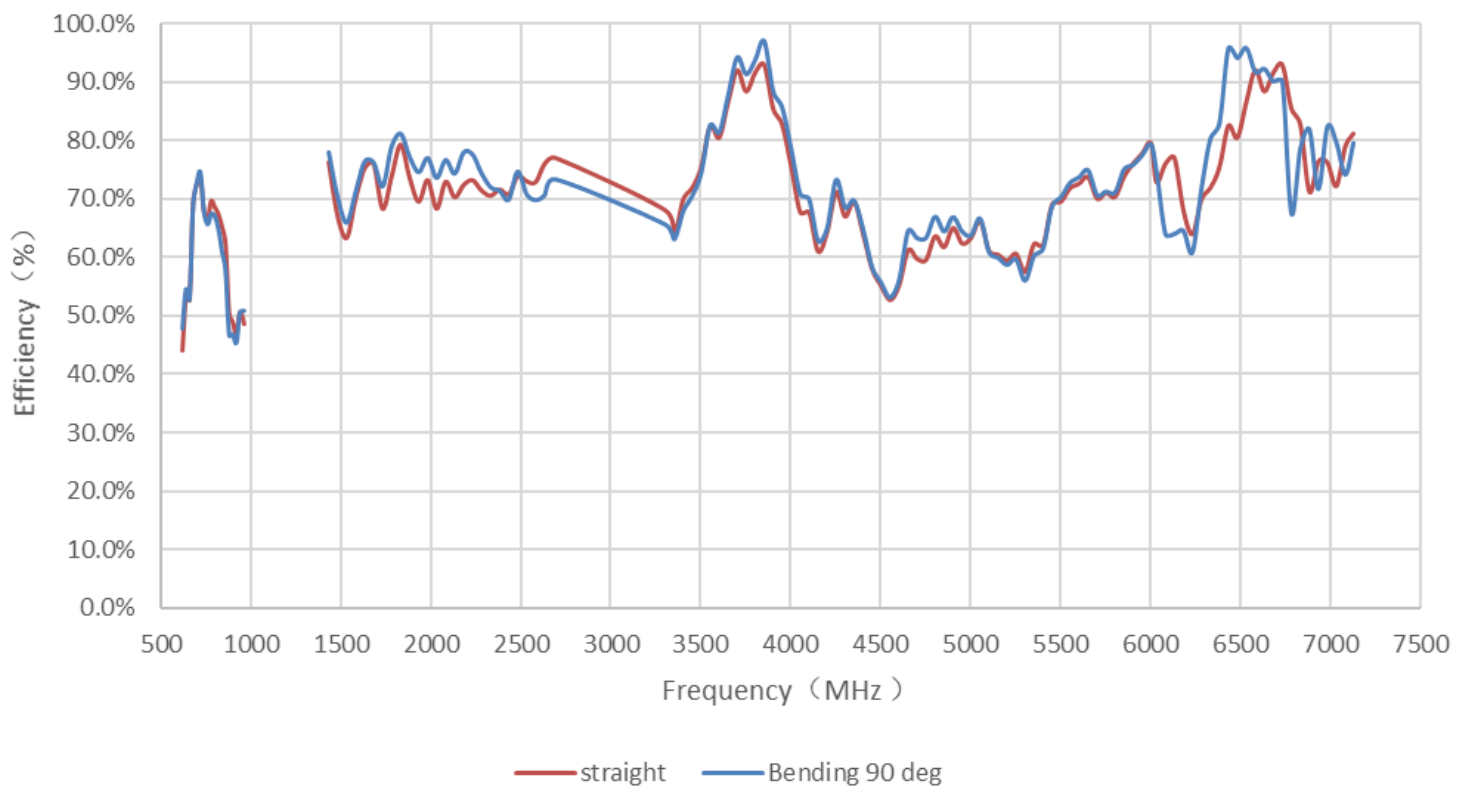

Issue: 2047

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.





Preliminary

TEST SETUP

Peak Gain Vs Frequency

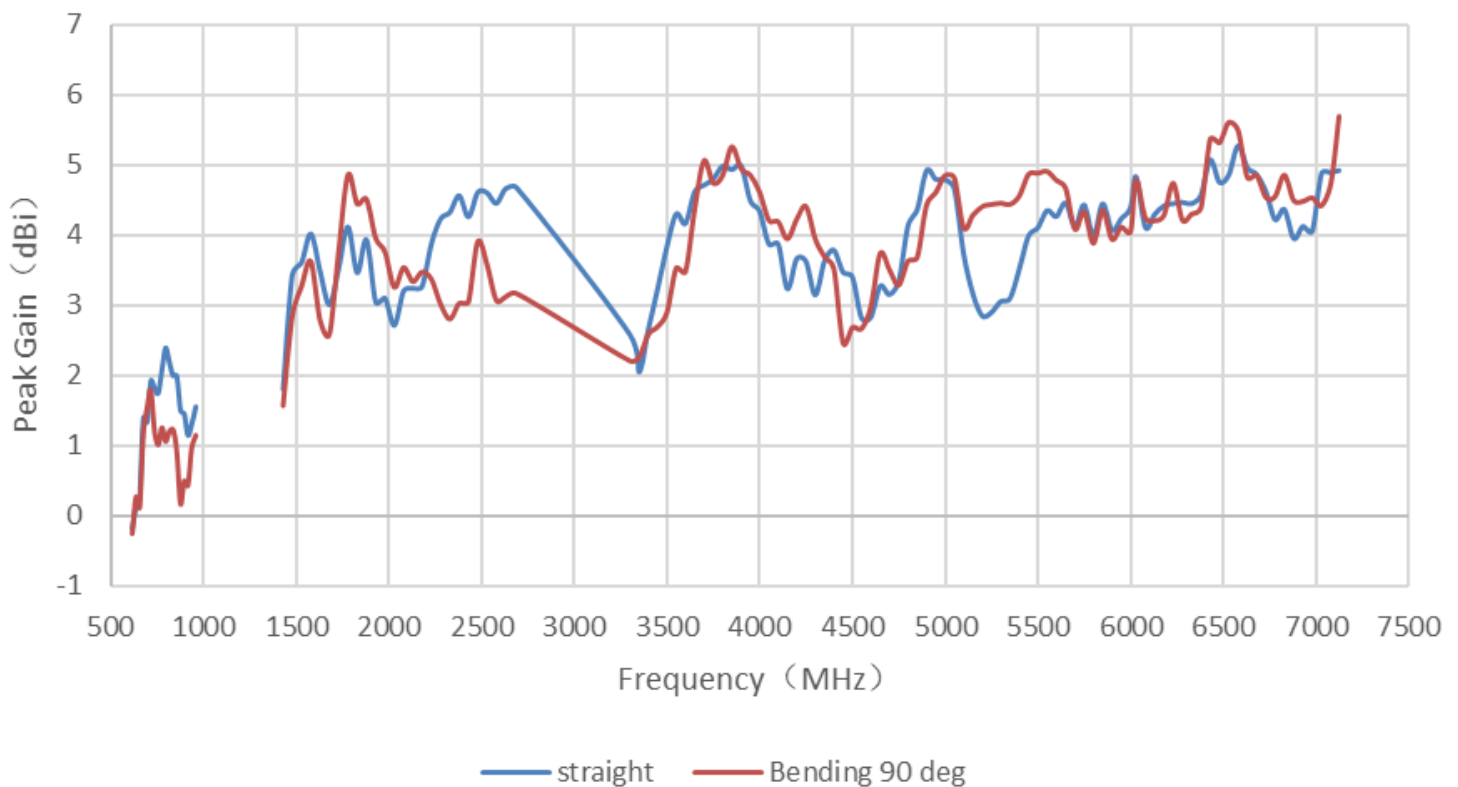

CHARTS

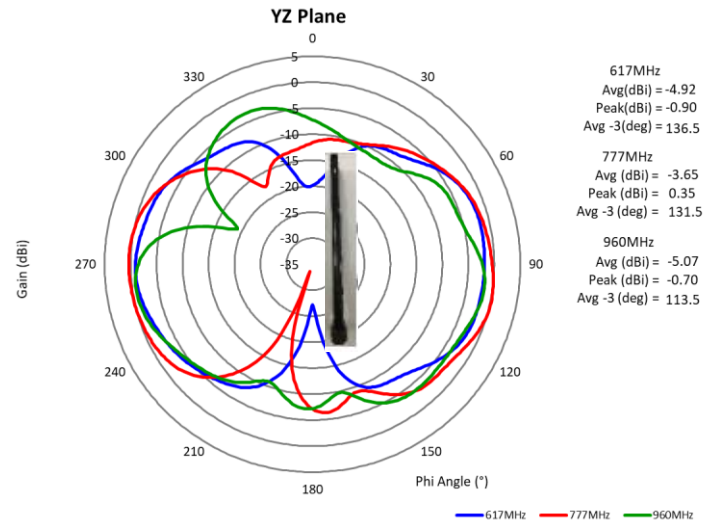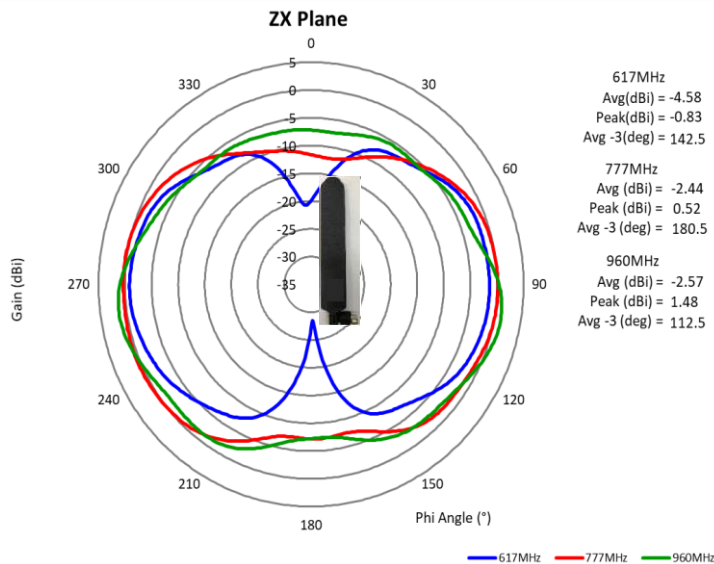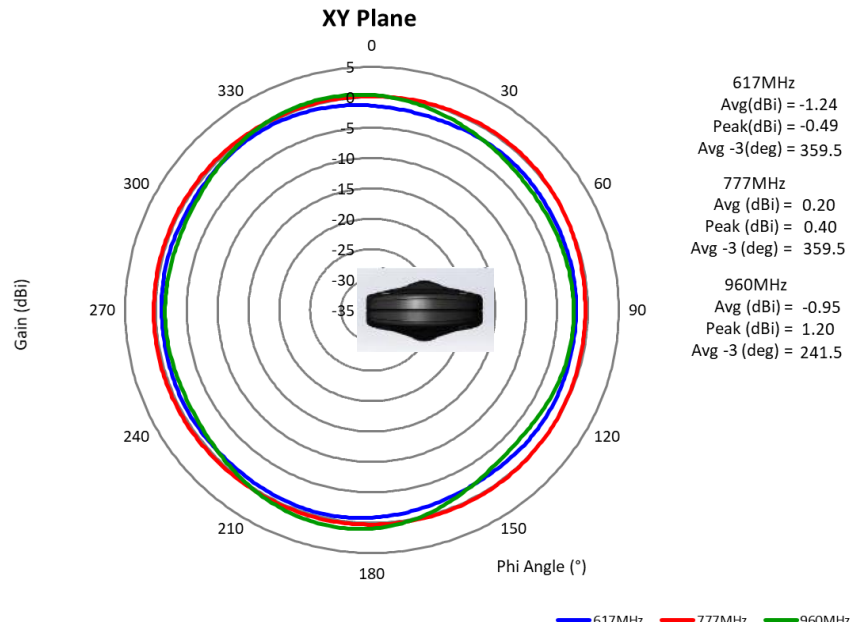

Issue: 2047





In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Preliminary

CHARTS

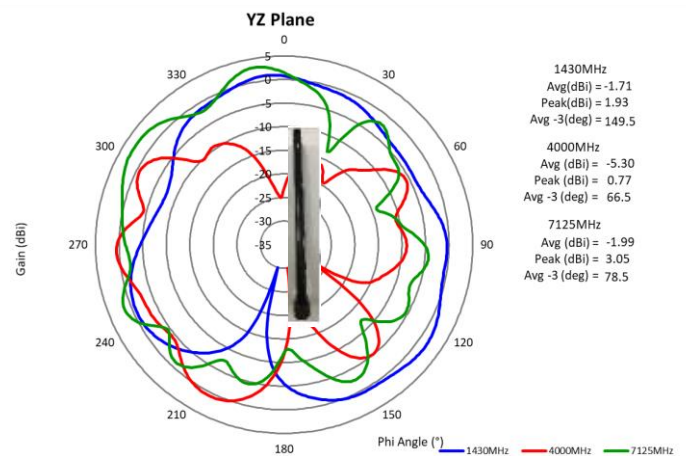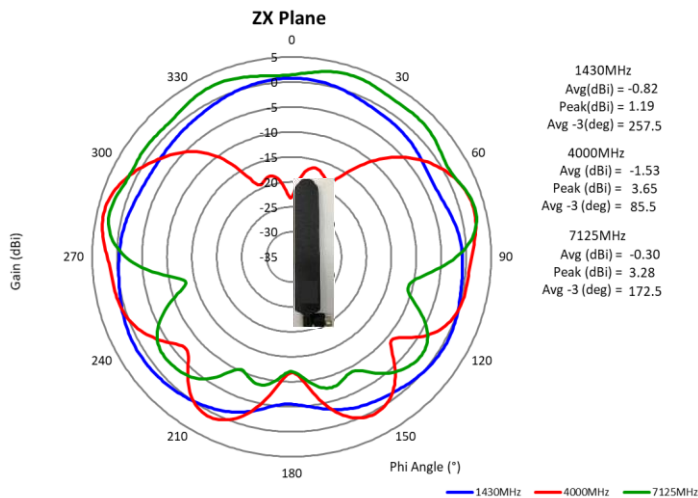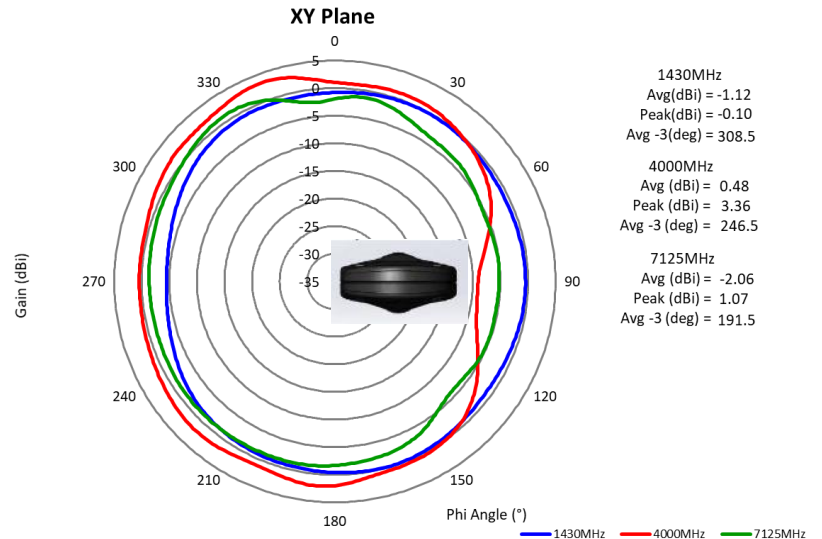

Issue: 2047

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Preliminary



a YAGEO company

Series: Blade Antenna

TECHNICAL DATA SHEET

Description: 5G FR1 617-7125MHz SWIVEL
MOUNT DIPOLE

PART NUMBER: W5151

PACKAGING

1PCS/PE bag
100PCS/Carton box

Issue: 2047

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Preliminary

