
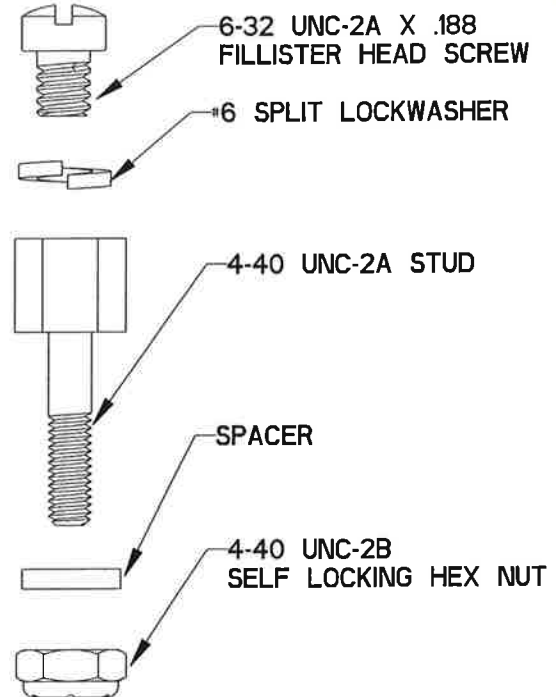
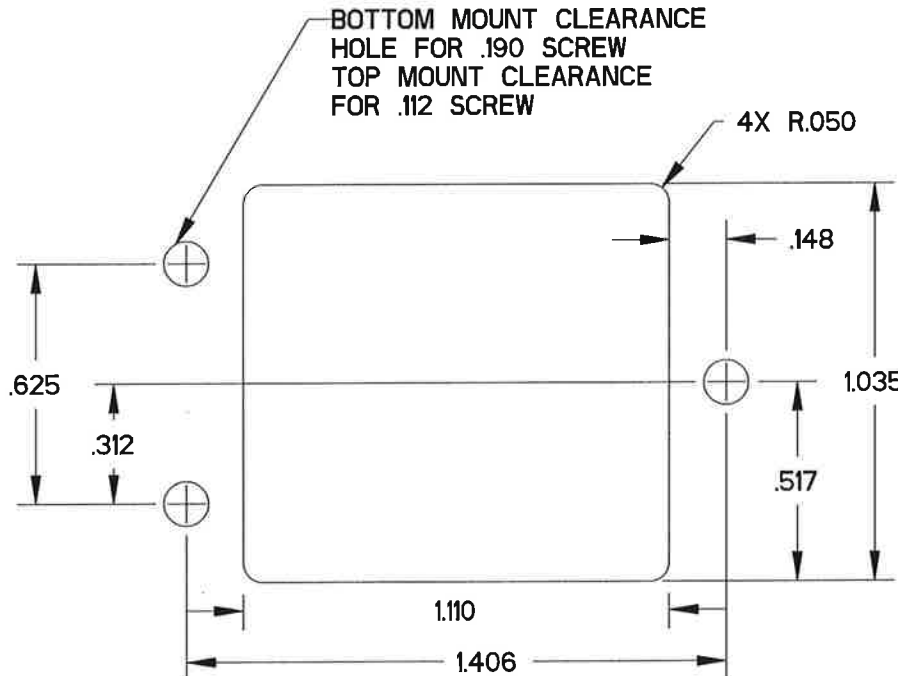
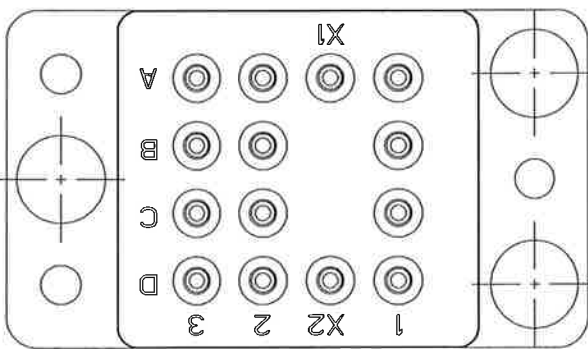
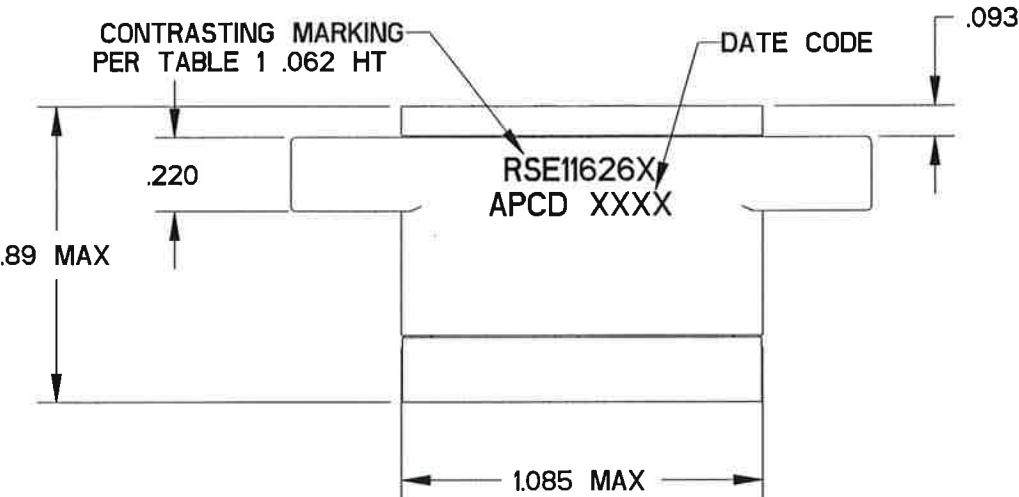


REV	ECN	APP'D
J	8428	wl 10/11/18

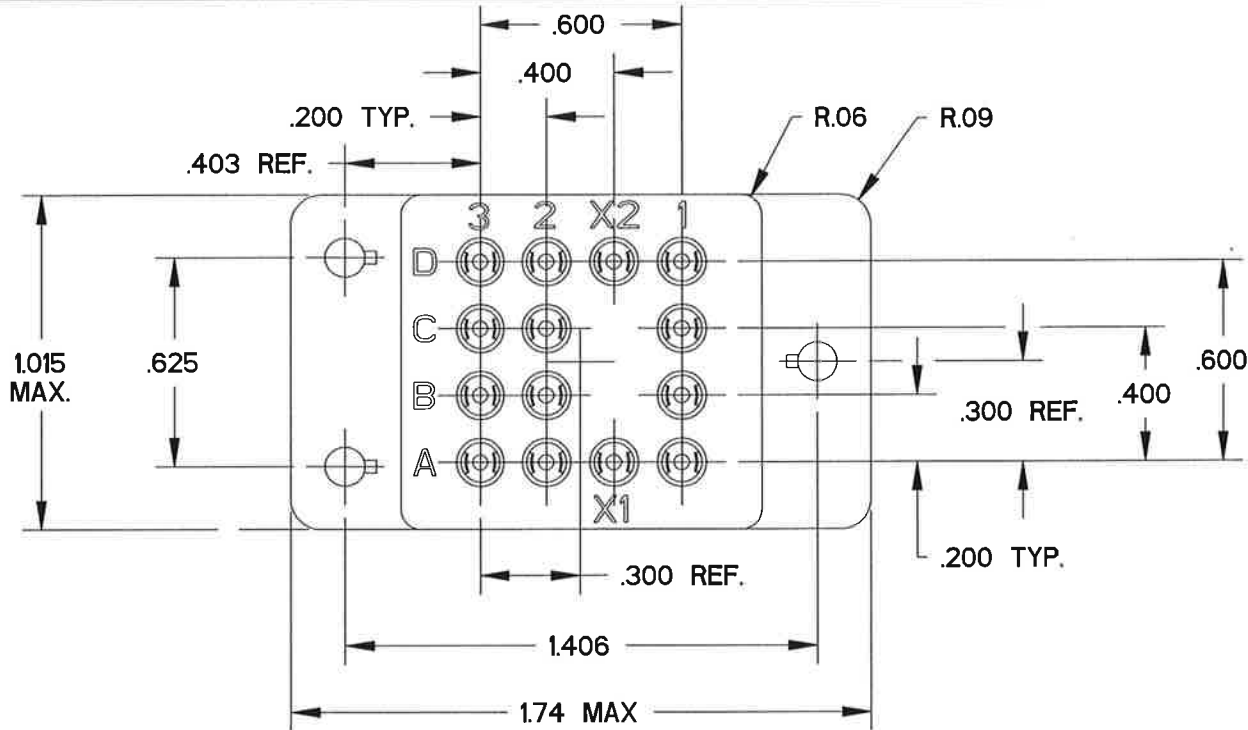

MOUNTING HARDWARE, 3X

- NOTES:
- CONFORMS TO PERFORMANCE REQUIREMENTS OF MIL-PRF-12883
 - MATERIALS:
SOCKET BODY: POLYETHERIMIDE PER MIL-P-46184
GROMMET: SILICONE RUBBER PER ZZ-R-765
HARDWARE: CRES STEEL AND CADMIUM CHROMATE FINISH.
CONTACT RETAINERS: BERYLLIUM COPPER
SOCKET CONTACTS: COPPER ALLOY, HARD COLD PLATED PER MIL-G-45204
 - OPERATING RANGE:
TEMPERATURE: -65°C TO 125°C
INSULATION RESISTANCE: 1000 MΩ MI.
DIELECTRIC WITHSTANDING VOLTAGE:
1500 VRMS AT SEA LEVEL,
500 VRMS AT 80,000 FT. ALTITUDE
VIBRATION: MIL-STD-202, METHOD 204,
TEST CONDITION G
SHOCK: MIL-STD-202, METHOD 213
TEST CONDITION C
 - PART SUPPLIED WITH MOUNTING HARDWARE.
 - PART SUPPLIED WITH CONTACTS PER TABLE.

PART NO.	CONTACTS SUPPLIED	MARKING
RSE116260	NONE	RSE116260
RSE116261	(14) M39029/92-533	RSE116261
RSE116262	(14) M39029/92-534	RSE116262

DIMENSIONS	TOLERANCES	PROJECTION
ANSI Y14.5M UNITS: INCHES Pro/E FILE	.XX ±0.01 .XXX ±0.005 ANGLES ±0.5°	
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., BEVERLY, MA	

Amphenol Pcd CUSTOMER DRAWING	
ENGR MAILOT GUERRERO	9/28/18
CHKD 	10/11/18
APPD 	10/11/18

TITLE RELAY SOCKET, 14 POS, SIZE 16	
SIZE B	CUSTOMER DWG NO. RSE116260_C
CODE: 58982	SCALE: 5:3
SHEET 1	OF 1

RSE116260_C

RSE116260_C