


Lead Acid Rechargeable Battery **multicomp**PRO

**RoHS
Compliant**



Dimensions

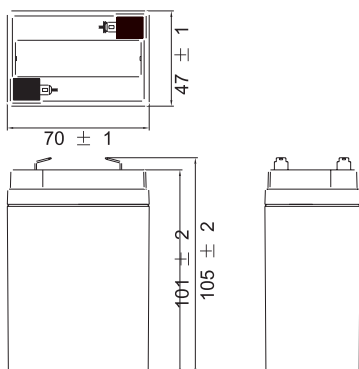

Nominal voltage		6V
Rated Capacity (20 HR)		4.5Ah
Approx Weight		0.73kg
Terminal	Standard	F1-TAB 187E
	Optional	F1 TAB 250A
Operation Temperature		
Charge	0°C (32°F) to 40°C (104°F)	
Discharge	-20°C (-4°F) to 50°C (122°F)	
Storage	-20°C (-4°F) to 40°C (104°F)	

Dimensions : Millimetres


Application

- Lighting equipment
- Portable video camera
- Portable personal computer
- Emergency lighting equipment
- Fire alarm and security systems
- Electric equipment and telemeter equipment
- Toys and consumer electronics
- Portable power tools, measuring and medical equipment

Capacity 25°C (77°F)		20 hour rate (0.225A)	4.5Ah
		10 hour rate (0.405A)	4.05Ah
		5 hour rate (0.72A)	3.6Ah
		1 hour rate (2.7A)	2.7Ah
Capacity affected by temperature		40°C (104°F)	103%
		25°C (77°F)	100%
		0°C (32°F)	86%
		-15°C (5°F)	65%
Self-discharge at 25°C (77°F) Before recharge		Capacity after 3 month	91%
		Capacity after 6 month	82%
		Capacity after 12 month	64%
Constant voltage charge	Cycle	Initial Charging Current ≤1.35A 7.2V to 7.5V at 25°C (77°F)	
	Standby	6.8V to 6.9V at 25°C (77°F)	
Max discharge current for 5 seconds			46.2A

Discharge characteristic

Battery Voltage(V)

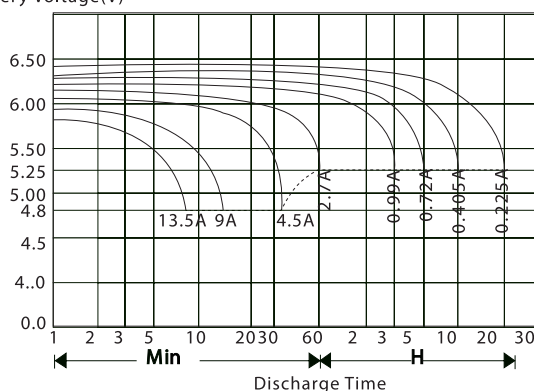

Note: Discharge shall be cut-off at 5.25V if discharge at 1CA and at 4.8V if at ≥1CA

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO

Lead Acid Rechargeable Battery **multicomp**^{PRO}

Constant current (Amp) and Constant Power (Watt) Discharge Table at 25°C (77°F)

Time (min) Final voltage		5	10	15	20	30	60	120	180	300	600
1.8VPC	A	10.974	9.856	7.259	5.297	4.089	2.501	1.498	0.93	0.714	0.392
	W	60.654	45.746	34.541	30.664	23.683	14.661	8.883	6.453	4.239	2.548
1.75VPC	A	11.539	10.169	7.834	5.554	4.416	2.7	1.556	0.99	0.72	0.405
	W	63.296	47.944	38.089	32.091	24.551	15.539	9.207	6.696	4.401	2.565
1.7VPC	A	12.497	10.856	8.105	5.844	4.5	2.726	1.646	1.202	0.784	0.431
	W	66.844	49.063	39.574	33.306	25.341	15.809	9.45	6.899	4.523	2.579
1.65VPC	A	13.236	11.154	8.568	5.998	4.59	2.758	1.648	1.2	0.786	0.433
	W	69.969	50.49	39.844	34.116	25.573	16.011	9.558	6.953	4.575	2.584
1.6VPC	A	14.066	11.358	9	6.166	4.738	2.803	1.679	1.088	0.797	0.441
	W	71.241	51.377	40.596	33.924	25.843	16.119	9.626	6.993	4.604	2.584

Part Number Table

Description	Part Number
Battery, Lead Acid, 4.5Ah, 6V	MP012446

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp^{PRO}