


6" USB A Male to Micro B Male Cable



Diagram

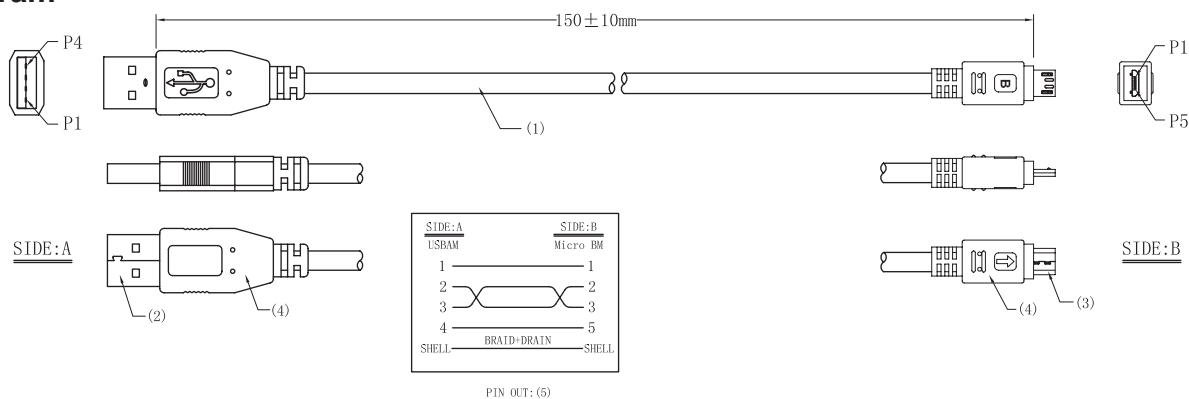

Dimensions : Millimetres

Note:

1. Cable Specifications: 28AWG (7*0.12Cu)*1P+28AWG (7/0.12Cu)*2C+AD(7/0.12CCAM)+Braid
(16*3/0.12ALMG)
Jacket Material: PVC OD: 3.8mm ±0.15mm

Cable Colour: Black

Cable Printing: USB 2.0 Cable Fully Rated 80°C 30V

2. Connector A: USB A Male Solder Type USB 2.0 Compliant

Insulation: White

Contact: Gold Plated

Shell: Nickel Plated

- ### 3. Connector B: USB B Male Solder Type

Insulation: Black

Contact: Gold Plated

Shell: Nickel Plated

- #### 4. Over Mold: PVC-BLACK

5. Parameter Settings: Conductive Resistance: 3Ω
Insulation Resistance: 5MΩ (Min.)

- ### 6. 100% electrical performance test

Part Number Table

Description	Part Number
6" USB A Male to Micro B Male Cable	83-16410