



REV	ECN	APP'D
G	5515	JT 9/14/04

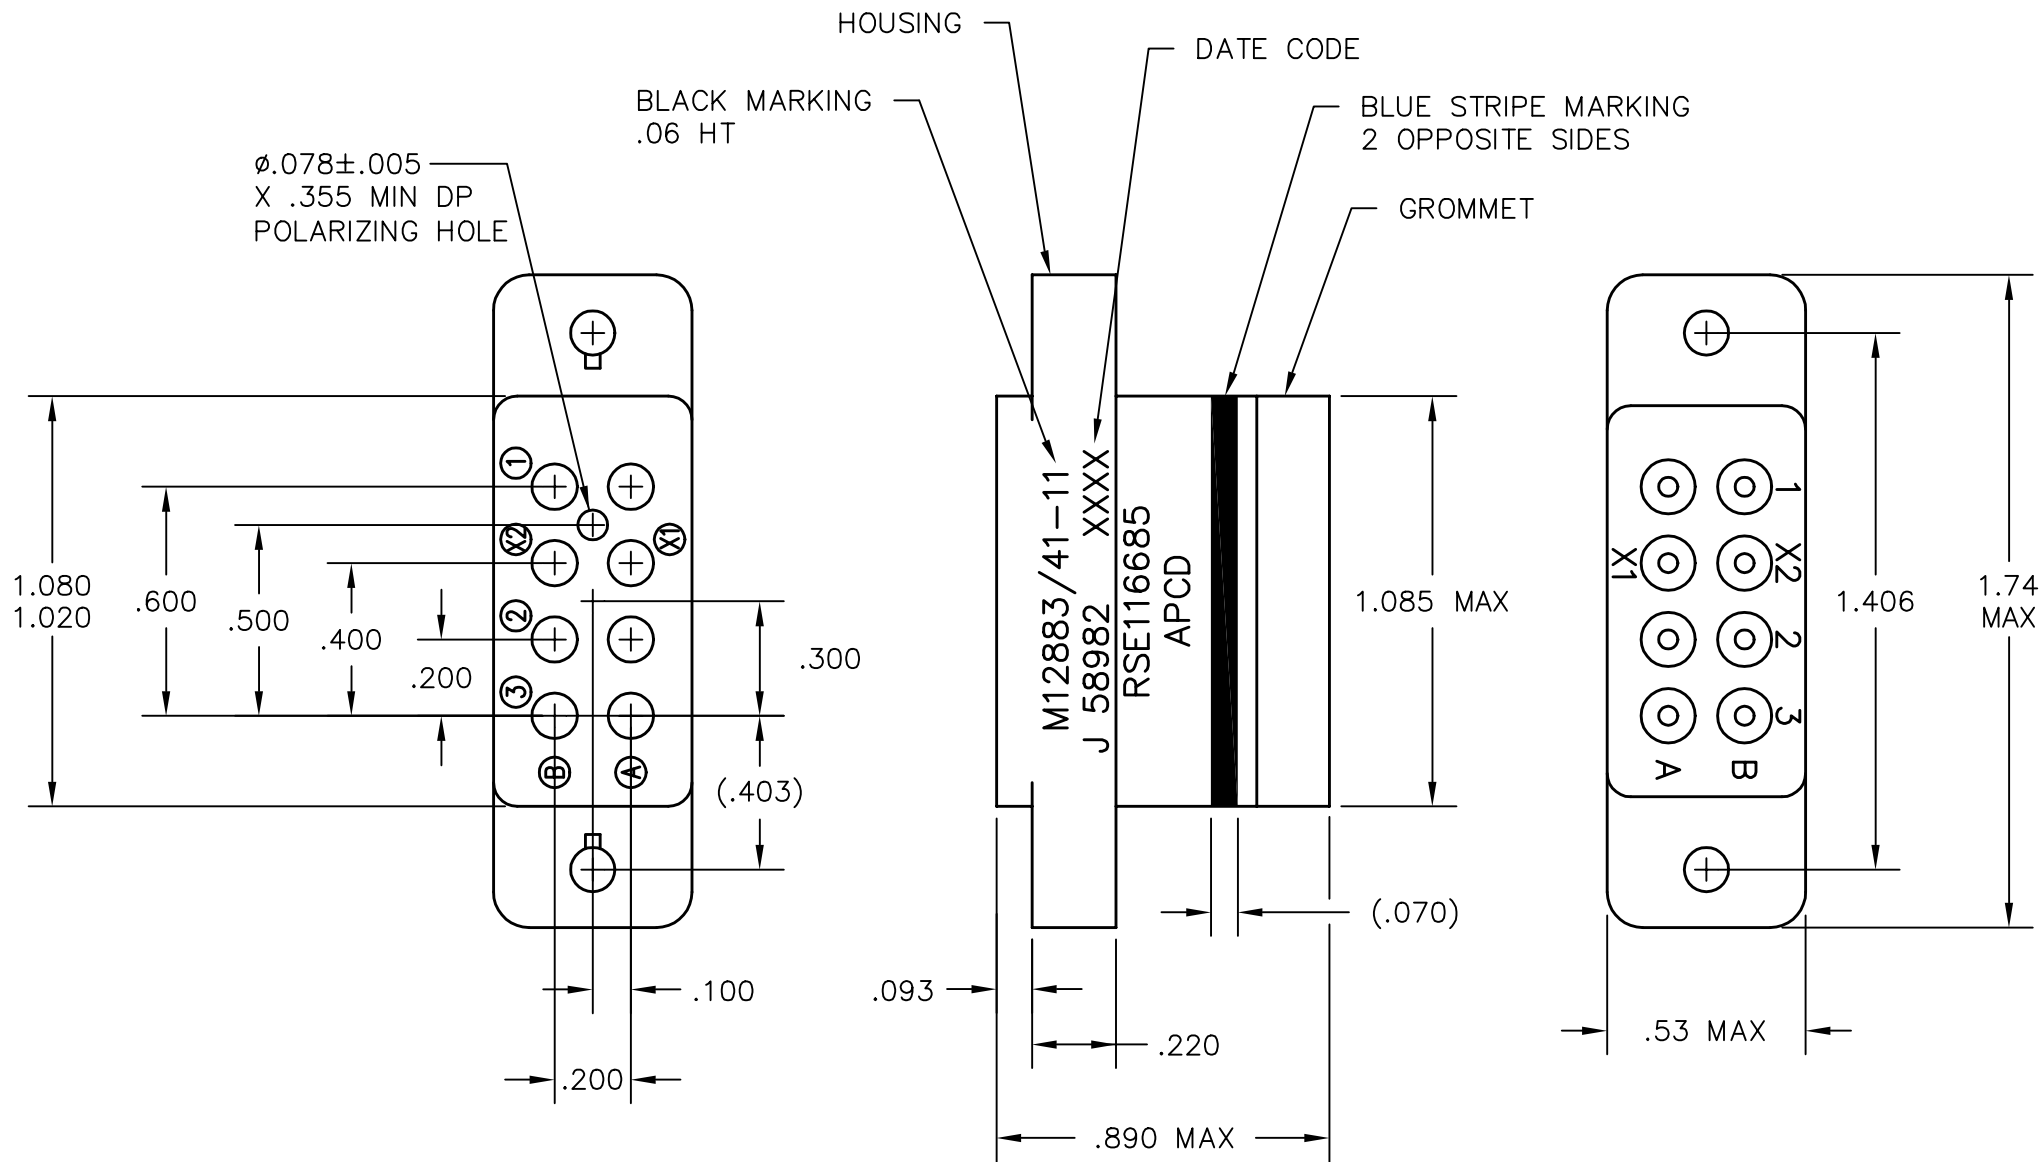

- NOTES:
- PART MEETS REQUIREMENTS PER MIL-PRF-12883.
 - MATERIALS:
 - SOCKET BODY: POLYETHERIMIDE PER MIL-P-46184
 - GROMMET: SILICONE RUBBER PER ZZ-R-765
 - HARDWARE: CRES STEEL AND CADMIUM CHROMATE FINISH.
 - CONTACT RETAINERS: BERYLLIUM COPPER
 - SOCKET CONTACTS: COPPER ALLOY, HARD GOLD PLATED PER MIL-G-45204
 - OPERATING RANGE:
 - TEMPERATURE: -65°C TO 125°C
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE:
 - 1500 VRMS AT SEA LEVEL,
 - 500 VRMS AT 80,000 FT. ALTITUDE
 - VIBRATION: MIL-STD-202, METHOD 204, TEST CONDITION G
 - SHOCK: MIL-STD-202, METHOD 213, TEST CONDITION C
 - PART SUPPLIED WITH MOUNTING HARDWARE.
 - PART SUPPLIED WITH CONTACTS PER TABLE BELOW.

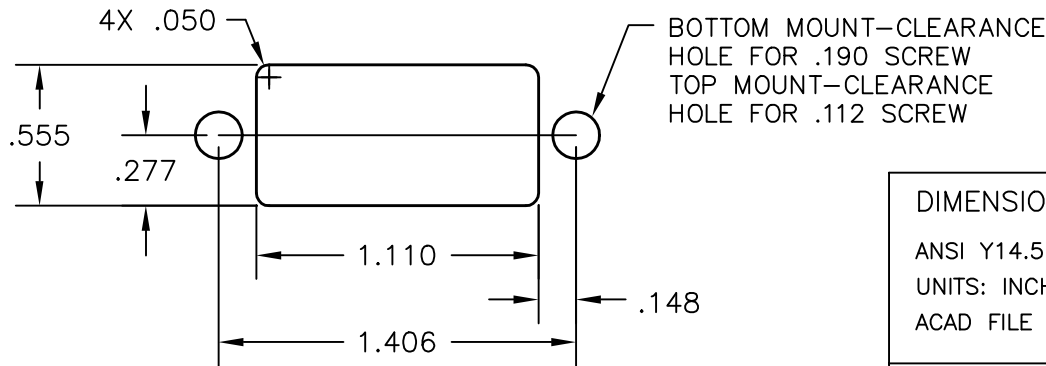

PART NO.	CONTACTS SUPPLIED	MARKING
RSE116684	NONE	RSE116685
RSE116685	8X 16/16 M39029/92-533	

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol Pcd		TITLE		
			SPECIFICATION DRAWING		RELAY SOCKET		
ORIGINAL	.XX ±.01 .XXX ±.005 ANGLES ±2°		ENGR S. KONDO 9/14/2004		SIZE B		REV G
			CHKD D. GANDHI 9/14/2004		DWG NO. RSE116684		SHEET 1 OF 1
			APPD J. TON 6/14/2004		CODE: 58982	SCALE: 2X	