


ODB6015 with PWM and Tach



DC Blower - 12V
60mm x 15mm (2.4" x 0.6")

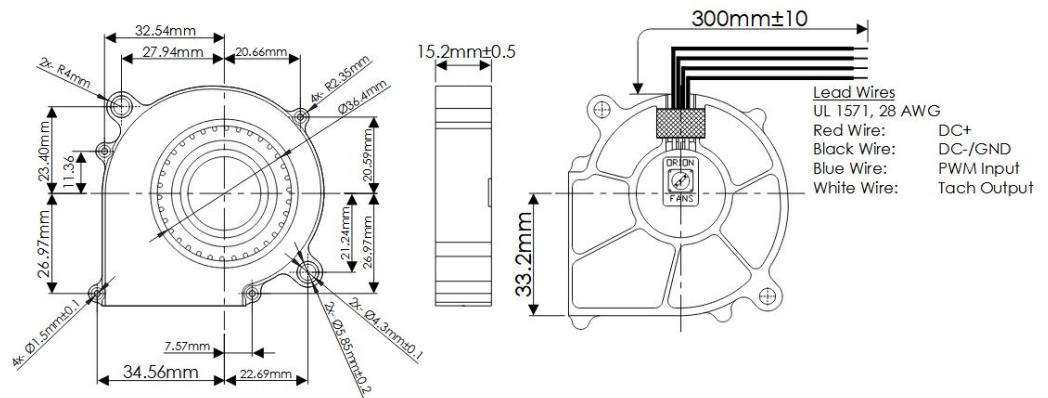

Frame	PBT, UL94 V-0 Plastic	Operating Temperature -20°C ~ +70°C Storage Temperature -30°C ~ +80°C Life Expectancy 70,000 Hours (L10 at 40°C) Installed Options PWM Speed Control Input Open Collector Tach Output Weight: 0.06 lbs	Static Pressure ("H₂O) Airflow (CFM)
Impeller	PBT, UL94 V-0 Plastic		
Connection	4x Wire Leads, 28 AWG		
Motor	Brushless DC, Auto Cutoff, Auto Restart, Electronically Protected, Polarity Protected		
Bearing System	Ball Bearings		
Dielectric Strength	500VDC/min, <1mA		
Insulation Resistance	≥10M Ohm @ 500 VDC		

Part Number	Rated Voltage (Volts DC)	Voltage Range (Volts DC)	Input Power (Watts)	Rated Current (Amps)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
ODB6015-12HHB10A	12	11 ~ 13.8	3.84	0.32	5000	6.9	46.2	0.80

