




Multi-Function Timer


- 13 Functions
- 10 Time Ranges
- Front knobs for Time Range, Time Scale & Mode Setting
- Slim, Space Saving Design
- DIN Rail Mount

DIMENSIONS (MILLIMETERS)

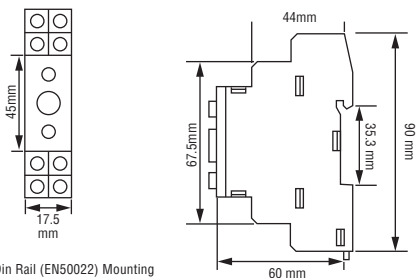

Symmetrical 35mm Din Rail (EN50022) Mounting

TERMINAL CONNECTIONS

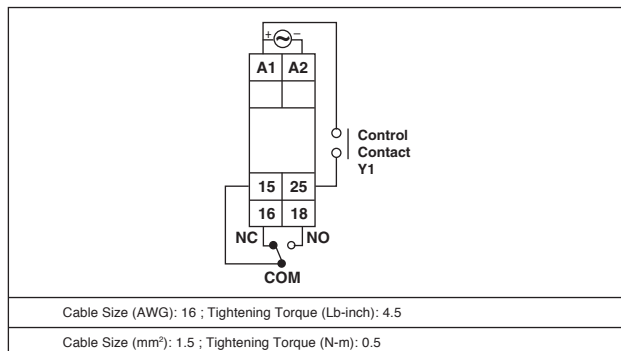

SPECIFICATIONS

ACCURACY	Setting: $\pm 5\%$ of F.S.
	Repeat: $\pm 0.5\%$ (F.S. = Full Scale)
RESET	Reset time < 100 msec
OUTPUT CONTACT	SPDT (1 C/O)
CONTACT RATING	N/O: 5A @ 250V AC N/C: 3A @ 250V AC
MODES	On delay (A)
	Interval (B)
	Cyclic equal OFF first (C)
	Cyclic equal ON first (Ci)
	Pulse output, 500ms fixed (D)
	Delay on break (E)
	Delay on make / Delay on break (F)
	Interval after break (H)
	Single shot (I)
	Retriggerable Single shot (J)
TIME RANGES	Latching relay (K)
	Delay with Totalize (Ai)
	Interval with Totalize (Bi)
SUPPLY VOLTAGE	0.1 - 1 sec, 0.3 - 3 sec, 1-10 sec, 3-30 sec
	0.1-1 min, 0.3-3 min, 1-10 min, 3-30 min
	0.1-1 hr, 0.3-3 hr
POWER CONSUMPTION	20-240V AC, 12-240V DC
	AC : (50 / 60 Hz)
TEMPERATURE	43.2VA max
	Operating: 0 to 50°C (32 to 122°F)
HUMIDITY (NON-CONDENSING)	Storage: -20 to 75°C (-4 to 167°F)
	95% RH
WEIGHT	
	0.163 lbs.
PROTECTION LEVEL	
	IP40 for Casing IP20 for Terminals

ORDERING INFORMATION

PART NO.	SUPPLY VOLTAGE
175MU	20-240V AC/DC
	12-240V DC

TIMING DIAGRAMS

