

**RoHS
Compliant**

Description

This product is a 15" (4:3) diagonally measured active display with high resolution XGA 1024×768 display and high brightness. This model is composed of a TFT LCD panel, backlight system and HDMI . It is designed to make Raspberry Pi usage easy. Can simply use this TFT display with your Raspberry Pi, or also can use this as computer display with any device which has HDMI output. This 15" TFT model comes in 1024×768 resolution that would be great for embedded computing usage too.

Specifications

Panel Size	: 15"
Number of Pixels	: 1024 (H) × RGB × 798 (V) Pixels
Active Area	: 304.1mm (H) × 228.1mm (V)
Pixel Pitch	: 0.297mm (H) × 0.297mm (V)
Outline Dimension	: 341.1mm (H) × 265.1mm (V) × 27.29mm (T)
Number of Colours	: 16.7M
Display Mode	: MVA / Normally Black / Transmissive
View Direction	: Wide viewing angle
Display Format	: RGB vertical stripe
Surface Treatment	: Clear/ KK3(Compatible)
Contrast Ratio	: 2500 (Typ.)
Luminance	: 1350cd/m ² (Typ.)
Video Input Interface	: HDMI (Compliance HDMI V1.4)
Backlight	: White LED
Operation Temperature	: -20°C to +70°C
Storage Temperature	: -30°C to +80°C
Weight	: 1670g

Absolute Maximum Ratings

Electrical Absolute Rating

HDMI TFT LCD Module

Item	Symbol	Values		Unit	Note
		Min.	Max.		
Power supply voltage	12V	10	14	V	-

Environment Absolute Rating

Item	Symbol	Values			Unit	Note
		Min.	Typ.	Max.		
Operating Temperature	Top	-20	-	+70	°C	Ambient Temperature
Storage Temperature	Tst	-30	-	+80		

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

Electrical Characteristics

HDMI TFT LCD Module

Item	Symbol	Values			Unit	Note
		Min.	Typ.	Max.		
Supply Voltage	12V	11	12	13	V	
PWM frequency		100	-	10K	Hz	
PWM Duty		17	-	100	%	<17%=OFF
PWM Dimming Voltage	VPWM-IH	3.3	-	8	V	
	VPWM-IL	0	-	0.3	V	
Supply Current	ICC(12V)	-	1.85	2.05	A	
LED life time		50000	-	-	Hr	(1)

Note 1:

The "LED life time" is defined as the module brightness decrease to 50% original brightness that the ambient temperature is 25°C 60% RH.

Projected Capacitive Touch Panel Specification

Main Feature

Item	Specification	Unit
Screen Size	15 inches	Diagonal
Type	Transparent Type Projected Capacitive Touch Panel	
Input Mode	Human's Finger	
Interface	I2C or USB	
Touch number	10 points	
Cover glass pencil-hardness	2.0T KK3(Compatible)	
Bonding	UV-CUT OCA	
Response time	≤25ms	ms
Controller IC	ILI2511	

PCT Control:IIC (CN4)

Pin No.	Symbol	I/O	Function	Note
1	GND	P	Ground	
2	VDD	P	Power supply for IIC	
3	SCL	I	IIC SCL to PCT Controller	
4	SDA	I/O	IIC SDA to PCT Controller	
5	INT	O	Interrupt	
6	RESET	I	Reset	

PCT Control:USB (CN5)

Pin No.	Symbol	I/O	Function	Note
1	GND -EARTH	P	Earth Ground(Shield)	
2	VDD_5V	P	Power supply for USB I/F	
3	GND	P	Power Ground	
4	D+	I/O	USB data +	
5	D-	I/O	USB data -	

PCT Control: FPC


Pin No.	Symbol	I/O	Function	Note
1	GND	P	Ground	
2	VDD	P	Power supply for I2C	3.3V
3	SCL	I	IIC SCL to PCT Controller	
4	SDA	I/O	IIC SDA to PCT Controller	
5	INT	O	Interrupt signal to inform the host processor that touch data is ready for read	
6	RESET	I	External low signal reset the chip.	
7	VDD_5V	P	Power supply for USB I/F	
8	D+	I/O	USB data +	
9	D-	I/O	USB data -	
10	GND	P	Ground	

Optical Characteristics

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Brightness		-	Note1, Note 3, (θ= 0°, Normal Viewing Angle)	1080	1350	-	cd/m ²
Contrast Ratio		CR		1800	2500	-	-
Response Time		Tr		-	16	21	ms
		Tf		-	7	14	ms
Colour Chromaticity	White	Wx		0.263	0.313	0.363	-
		Wy		0.279	0.329	0.379	-
	Red	Rx		0.597	0.647	0.697	
		Ry		0.288	0.338	0.388	
	Green	Gx		0.271	0.321	0.371	
		Gy		0.556	0.606	0.656	
	Blue	Bx		0.107	0.157	0.207	
		By		0.000	0.039	0.089	
View angle	Horizontal	θx+	Centre CR≥10	80	88	-	
		θx-		80	88		
	Vertical	θY+		80	88		
		θY-		80	88		

Note: The following optical specifications shall be measured in a darkroom or equivalent state(ambient luminance ≤1 lux, and at room temperature). The operation temperature is 25°C±2°C. The measurement method is shown in Note1.

Note 1: The method of optical measurement

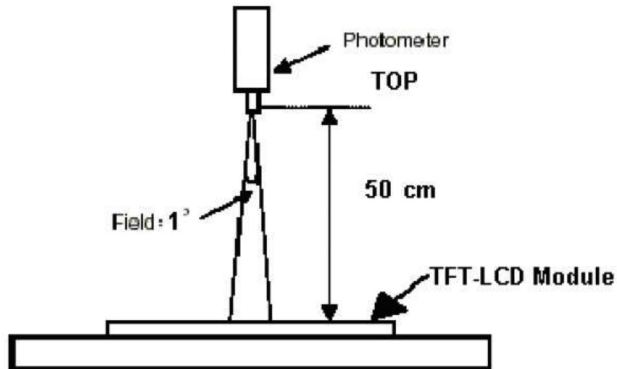


Note 2: Measured at the centre area of the panel and at the viewing angle of the $\theta_x = \theta_y = 0^\circ$


Note 3: Definition of Contrast Ratio (CR):

CR = Luminance with all pixels in white state $\div$ Luminance with all pixels in Black state

Note 4: Definition of Viewing Angle:

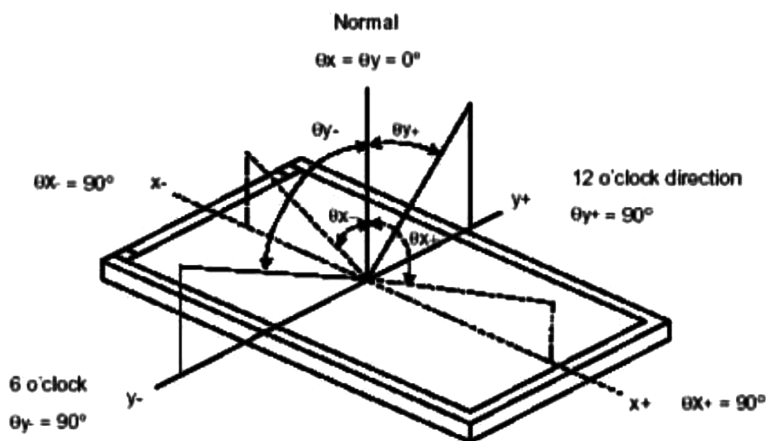


Note 5: Definition of Brightness Uniformity (B-uni):

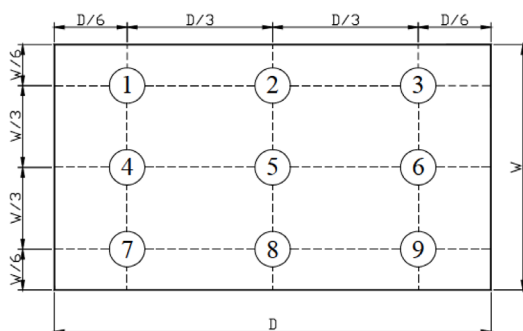

B-uni = (Minimum luminance of 9 points $\div$ Maximum luminance of 9 points) X 100%

Note 6: Definition of Response Time:


The Response Time is set initially by defining the "Rising Time (Tr)" and the "Falling Time (Tf)" respectively. Tr and Tf are defined as following figure

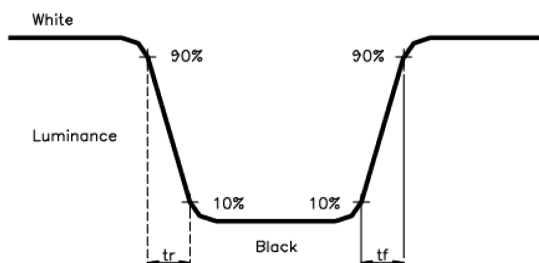

Note 7: Definition of Chromaticity:

The colour coordinates (Wx,Wy),(Rx,Ry),(Gx,Gy),and (Bx,By) are obtained with all pixels in the viewing field at white, red, green, and blue states, respectively.

Diagram

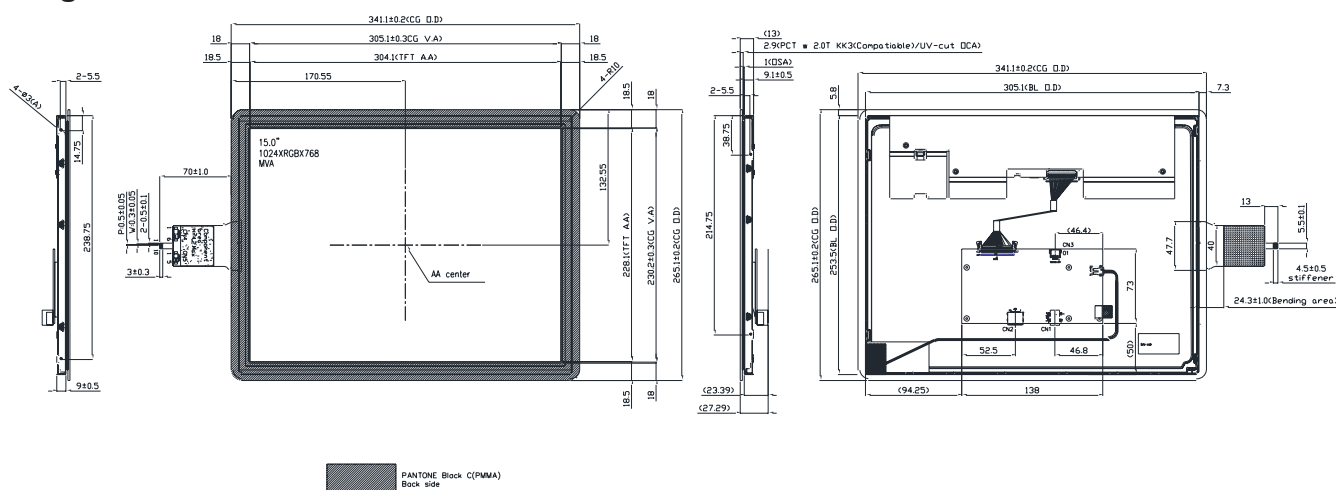

Dimensions : Millimetres

Pin Description

Power Input (CN1)

Pin No.	Symbol	I/O	Function	Note
1	12V	P	Power Supply +12V	
2	GND	P	Ground	

Back-light Control (CN2)

Pin No.	Symbol	I/O	Function	Note
1	GND	P	Ground	-
2	N.C.	-	N.C.	-
3	PWM	I	Back-light Dimming control (internal pull up to 3.3V)	*

* When PWM not connected, back-light default is typical brightness.


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

HDMI (CN3)

Pin No.	Symbol	I/O	Function	Note
1	TMDS 2+	I	TMDS Data2+	
2	GND	P	TMDS Data2 Shield	
3	TMDS 2-	I	TMDS Data2-	
4	TMDS 1+	I	TMDS Data1+	
5	GND	P	TMDS Data1 Shield	
6	TMDS 1-	I	TMDS Data1-	
7	TMDS 0+	I	TMDS Data0+	
8	GND	P	TMDS Data0 Shield	
9	TMDS 0-	I	TMDS Data0-	
10	TMDS CLK+	I	TMDS Clock+	
11	GND	P	TMDS Clock Shield	
12	TMDS CLK-	I	TMDS Clock-	
13	N.C.	-	N.C.	
14	N.C.	-	N.C.	
15	DDC_SCL	I	IIC SCL to EDID ROM	
16	DDC_SDA	I/O	IIC SDA to EDID ROM	
17	GND	P	DDC/CEC Ground	
18	HD_5V	P	+5V Power	
19	HPD	O	Hot Plug Detect	

Block Diagram

TFT LCD Module

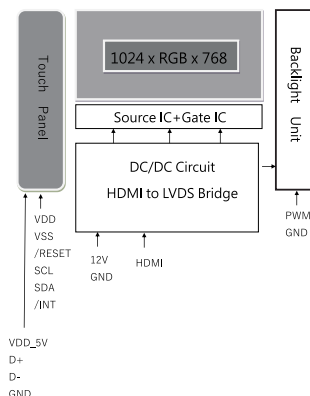

Part Number Table

Description	Part Number
TFT LCD, 15", HDMI, 1024×768, Capacitive Touch	MP013338

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.