

AC/DC 75W Enclosed Switching Power Supply

TGR75-xx, TGR75-xx-Q Series



RoHS



FEATURES

- Universal 85 - 305VAC or 120 - 430VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- IEC/EN/UL62368, EN60335, EN61558, GB4943 safety approved
- Over-voltage class III (designed to meet EN61558)
- Operating altitude up to 5000m

TGR75-xx series is one of Tiger Power Supplies' enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, EN60335, EN61558, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
UL/CE/CCC	TGR75-5	70	5V/14A	4.5-5.5	85	10000
	TGR75-12	72	12V/6A	10.2-13.8	87	6000
	TGR75-15	75	15V/5A	13.5-18	87	5000
	TGR75-24	76.8	24V/3.2A	21.6-28.8	89	1500
	TGR75-36	75.6	36V/2.1A	32.4-39.6	89	1000
	TGR75-48	76.8	48V/1.6A	43.2-52.8	90.5	680
CE	TGR75-55	75	55V/1.36A	52-56	90.5	680

Note: *terminal with protective cover supplied as standard. Suffix "Q" for conformal coating.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	305	VAC
	DC input		120	--	430	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	2	A
	230VAC		--	--	1	
Inrush Current	115VAC	Cold start	--	40	--	
	230VAC		--	75	--	
Leakage Current	277VAC		<0.75mA			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	--	±2	--	%
		12V/15V/24V/36V/48V/55V	--	±1	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load	5V	--	±1	--	
		12V/15V/24V/36V/48V/55V	--	±0.5	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V	--	100	--	mV
		12V/15V	--	120	--	

AC/DC 75W Enclosed Switching Power Supply

TGR75-xx, TGR75-xx-Q Series



		24V	--	150	--	
		36V/48V/55V	--	200	--	
Temperature Coefficient	0℃ to 50℃, 230VAC		--	±0.03	--	%/℃
Minimum Load			0	--	--	%
Stand-by Power Consumption			--	--	0.5	W
Hold-up Time	115VAC		8	--	--	ms
	230VAC		55	--	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear.		Hiccup, continuous, self-recovery			
Over-current Protection	230VAC, rated load	Normal temperature, High temperature	110%-200% Io, self-recovery			
		Low temperature	≥110% Io, self-recovery			
Over-voltage Protection	5V		≤6.3VDC (Output voltage clamp)			
	12V		≤16.2VDC (Hiccup, self-recovery)			
	15V		≤21.75VDC (Hiccup, self-recovery)			
	24V		≤33.6VDC (Hiccup, self-recovery)			
	36V		≤50VDC (Output voltage clamp)			
	48V/55V		≤60VDC (Output voltage clamp)			
Note: *The “Tip and barrel method” is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.						

General Specifications

Item		Operating Conditions			Min.	Typ.	Max.	Unit
Isolation Test	Input - 	Electric strength test for 1min., leakage current <10mA			2000	--	--	VAC
	Input - output				4000	--	--	
	output - 				1250	--	--	
Insulation Resistance	Input - 	At 500VDC			100	--	--	MΩ
	Input - output				100	--	--	
	output - 				100	--	--	
Operating Temperature					-30	--	+70	℃
Storage Temperature					-40	--	+85	
Operating Humidity		Non-condensing			20	--	90	%RH
Storage Humidity					--	--	95	
Switching Frequency					--	65	--	kHz
Power Derating		Operating temperature derating	5V output	+40℃ to +70℃	1.3	--	--	%/℃
			Other output	+50℃ to +70℃	2	--	--	
		Input voltage derating	85VAC-100VAC		1.33	--	--	%/VAC
			277VAC-305VAC		0.71	--	--	
Safety Standard		Meet IEC/EN/UL62368/EN60335/EN61558/GB4943						
Safety Certification		5V/12V/15V/24V/36V/48V			IEC/EN/UL62368/EN60335/EN61558/GB4943			
		55V			EN62368/EN60335/EN61558			
Safety Class					CLASS I			
MTBF		MIL-HDBK-217F@25℃			>300,000 h			

Mechanical Specifications



Case Material	Metal (AL1100, SGCC)
Dimensions	99.00 x 97.00 x 30.00 mm
Weight	220g (Typ.)
Cooling Method	Free air convection

AC/DC 75W Enclosed Switching Power Supply

TGR75-xx, TGR75-xx-Q Series



Product Characteristic Curve

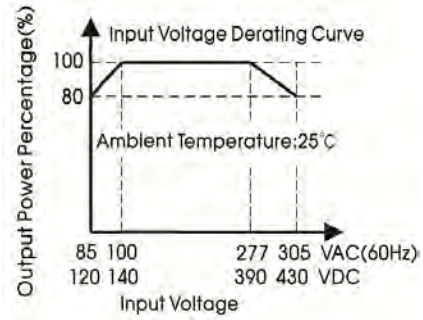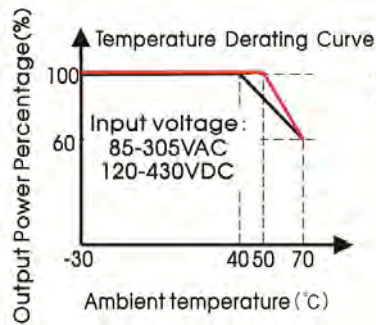


Note: 1. With an AC input voltage between 85 -100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;


2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

Dimensions and Recommended Layout

TGR75-XX (NO TERMINAL COVER), TGR75-xx-Q Series

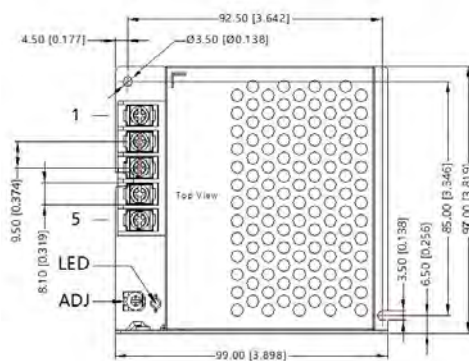


THIRD ANGLE PROJECTION





Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⊕
4	-Vo
5	+Vo

①-⑧ any position must be connected to the earth (⊕)

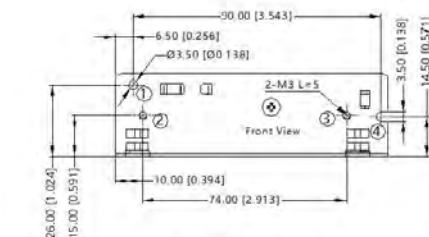

Position	Screw Spec.	L(max)	Torque(max)
② - ③	M3	5mm	0.4N·m
⑥ - ⑦	M3	3mm	0.4N·m

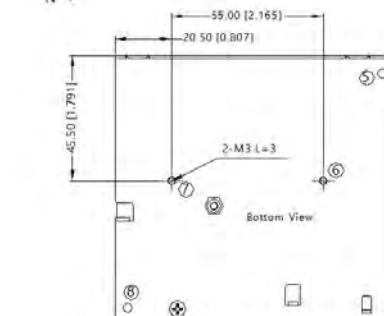

Note:

Unit: mm[inch]

Wire range: 22-12AWG

Connector tightening torque: M3.5 , 0.8N·m


General tolerances: $\pm 1.00[\pm 0.039]$

AC/DC 75W Enclosed Switching Power Supply

TGR75-xx, TGR75-xx-Q Series



TGR75-XX Series (with terminal cover)

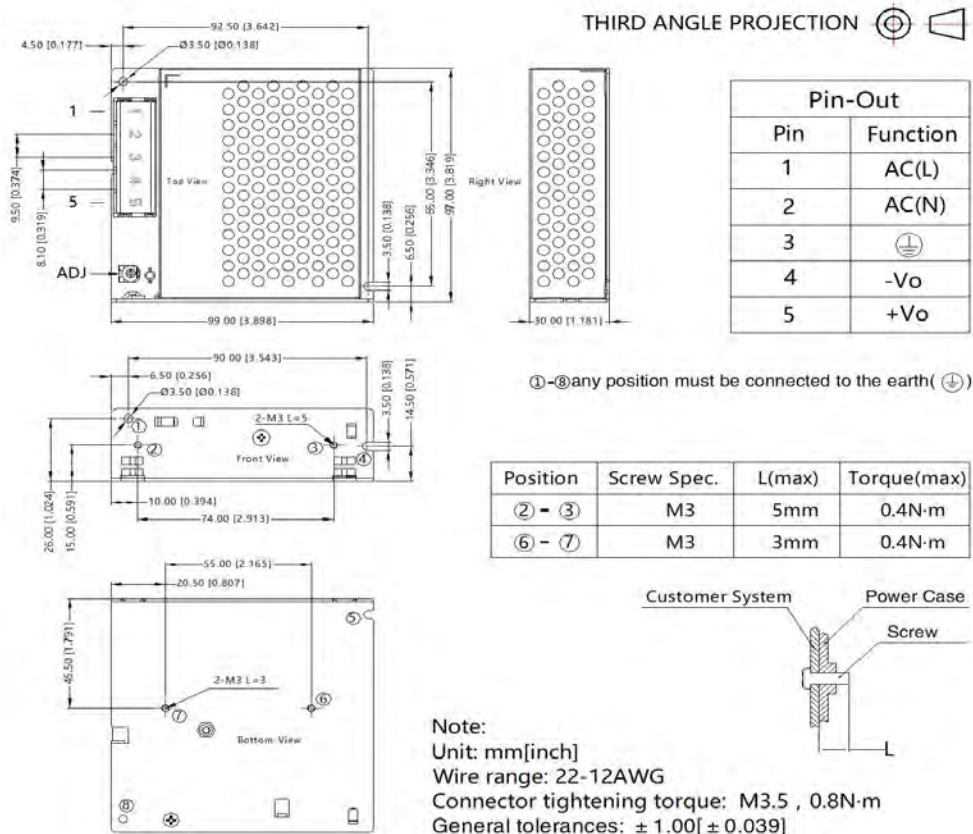

Note:

- For additional information on Product Packaging please refer to www.TigerPowerSupplies.com
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- The room temperature derating of $5^{\circ}\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to the earth () of system when the terminal equipment in operating;
- Our products shall be classified according to related environmental laws and regulations, and shall be handled by qualified units.